FF101 Face Frame Configuration
Constructed with FS100 Straight Stock

Face Frames With Inset Doors & Drawer Fronts
Precision Sized To Fit Openings

Signature Series Key:
S543 Integrity - Inset With FF101 (FS100)
S541 Carter - Inset With FF101 (FS101 & FS102)

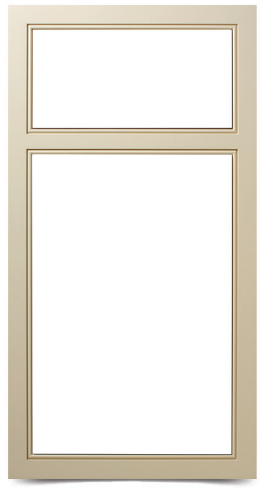

FF101 Face Frame Configuration
Constructed with FS101 & FS102 Beaded Stock

FS100 Square Stock



FS100 Beaded Stock

Face Frame Options - Table of Contents

Section Name	Page #
J.1 • Face Frame Stock	J.1.2
• Face Frame Stock - Square	J.1.2
• Face Frame Stock - Beveled	J.1.3
• Face Frame Stock - Beaded	J.1.4
J.2 • Assembled & Ready to Assemble (RTA) Face Frames	J.2.1
• Assembled & Ready to Assemble (RTA) Face Frames	J.2.1
• Face Frame Joinery Options	J.2.1
• Integral Beaded Face Frames w/ Haunched Joints & Dado Grooves	J.2.2
• Cross-Grain Dadoes on Face Frames (Not Recommended)	J.2.3
• Face Frame Configurations - Base & Upper	J.2.4
• Face Frame Configurations - Base	J.2.5
• Face Frame Configurations - Upper	J.2.9
• Face Frame Configurations - Tall	J.2.10
• Face Frame Configurations - Arched Top Face Frame Configurations	J.2.13
• Face Frame Configurations - Inside & Outside Corner (Lazy Susan)	J.2.14
J.3 • Face Frame Options - Square / Tapered Foot Option	J.3.1
J.4 • Face Frame Options - Miscellaneous Joinery Options for Face Frames	J.4.1
J.5 • Face Frame Options - Beaded Applied Molding Options	J.5.1
J.6 • Face Frame Options - Inset / Pre-fit Doors	J.6.1
J.7 • Face Frame Options - Blind Corner Extension Option	J.7.1
J.8 • Cabinet Fillers	J.8.1

Face Frame Stock - Square

FS100 *Face Frame Stock - Square*



Ordering & Pricing Notes: Face Frame Stock - Square		
	Ordering Guidelines	
1	**Order Forms**	Please use ***Face Frame Stock Order Form (E•Z Form #9)***.
	Pricing	
1	**Pricing**	Please see ***Section J.1*** of our current **Wholesale Pricing Catalog**.

Technical Notes: Face Frame Stock - Square		
	Face Frame Options (Chapter J)	
1	**FS100**	Square lineal stock run through a molder.

	Finish Options (Chapter R)	
1	**Finishing**	Finishing is available.
		Face Frame Stock will be stained and sealed on the face, back and all edges, and top coated on the face and all edges.
2	**3D Laminate**	3D Laminate (RTF) Face Frame Stock (**FS100** only) is made of a solid wood core (Maple - Paint Grade) and ***is not*** subject to the same thickness limitations as MDF.
		As a standard, WalzCraft will apply the 3D laminate material to the face and two long edges only. Not available with 3D Laminate on the ends.
		3D Laminate face frame stock is only available with a D33 outside edge profile on the two long edges.

	Sizes / Dimensions	
1	**Thickness**	Available in ½" [12.7mm], ⅝" [15.9mm], ¾" [19.1mm], ⅞" [22.2mm], 1" [25.4mm], 1⅛" [28.6mm] or 1¼" [31.8mm] thicknesses.
2	**Width**	**FS100** Face Frame Stock is available in a minimum width of a ⅝" [15.9mm] and a maximum width of 9" [228.6mm].
		Minimum Width - Dimension for **FS100** Face Frame Stock when used in Assembled and Ready to Assemble (RTA) Face Frames with Pocket Screw joinery is ⅝" [15.9mm].
		Minimum Width - Dimension for **FS100** Face Frame Stock when used in Assembled and Ready to Assemble (RTA) Face Frames with Biscuit or Domino Tenon joinery is 1" [25.4mm].
		9" [228.6mm] Maximum Width: WalzCraft makes every attempt to produce these parts from one solid piece of wood. Due to lumber availability and/or wood species, widths under 9" [228.6mm] may need to be made from two or more edge glued pieces. For widths over 9" [228.6mm], please refer to our **GUPFS** product found in ***Section M.16***.
3	**Length**	Available in 8' [2438.4mm] Lengths, Cut to Length and Random Lengths. • Face frame stock with 3D Laminate is only available in 8' [2438.4mm] lengths (not available cut to length or in random lengths).
		The minimum length for Cut-to-Length pieces is 3" [76.2mm].
		Random length sizes vary between 36" [914.4mm] and 96" [2438.4mm] long. When measured, we round down to the next nearest ½ foot. Minimum quantity of 200 lineal feet.
		Solid wood face frame stock has a standard length of up to 96" [2438.4mm]. Lengths greater than 8' [2438.4mm] are subject to availability. *Please note that the choice of wood species and grade can impact the availability of lengths greater than 8' [2438.4mm].* • Lengths longer than 8' [2438.4mm] are not available for face frame stock with 3D Laminate.

▶ **For PRICING** ▶ *See Section **J.1*** in our current Wholesale Pricing Catalog.

Face Frame Stock - Beveled

Face Frame Options

FS107 *Face Frame Stock - Beveled*



FS108 *Face Frame Stock - Beveled*



"Looks" *Inset Door / Face Frame*



1" Face Frame with ¾" Door

Shown at ½ Scale

¾" Face Frame with ¾" Door

Shown at ½ Scale

Ordering & Pricing Notes: Face Frame Stock - Beveled

Ordering Guidelines

1	**Order Forms**	Please use ***Face Frame Stock Order Form (E•Z Form #9)***.

Pricing

1	**Pricing**	Please see ***Section J.1*** of our current **Wholesale Pricing Catalog**.

Technical Notes: Face Frame Stock - Beveled

Face Frame Options (Chapter J)

1	**Face Frame Stock - Beveled**	Beveled Face Frame Stock is used most often for assembled or ready to assemble (RTA) haunched face frames, with inset doors and drawer fronts.
		The beveled edge is incorporated on one or two sides.

J

Finish Options (Chapter R)

1	**Finishing**	Finishing is available.
		Beveled Face Frame Stock will be stained and sealed on the face, back and all edges, and top coated on the face and all edges.
2	**3D Laminate**	Beveled Face Frame Stock is not available with 3D Laminate (RTF).

Functional Options (Chapter F)

1	**Miscellaneous Joinery**	Miscellaneous Joinery options (*see illustrations in* ***Section F.2***) are only available on **FS107** where there is one side without a bevel.
		Joinery options will be added to the side of the product without a bevel.

Profile Options (Chapter E)

1	**Additional Profiles Bevel Location**	An additional outside edge cannot be used on the beveled side.
		The bevel is not available on the ends.

Sizes / Dimensions

1	**Thickness**	Available in ¾" [19.1mm] and 1" [25.4mm] thicknesses. • **¾" [19.1mm] Face Frames** - Only available with ¾" [19.1mm] Doors & Drawer Fronts using **D24** Outside edge. • **1" [25.4mm] Face Frames** - Only available with ¾" [19.1mm] Doors & Drawer Fronts using **D7** Outside edge.
2	**Width**	Beveled Face Frame stock is available in a minimum width of a 1" [25.4mm] and a maximum width of 9" [228.6mm].
		Minimum Width - Dimensions for Beveled Face Frame Stock when used in Assembled and Ready to Assemble (RTA) Face Frames with Pocket Screw joinery: **FS107 =** 1" [25.4mm]**, FS108** = 1¼" [31.8mm].
		Minimum Width - Dimensions for Beveled Face Frame Stock when used in Assembled and Ready to Assemble (RTA) Face Frames with Biscuit or Domino Tenon joinery: **FS107 =** 1⅜" [33.3mm], **FS108** = 1⅝" [41.3mm]
		9" [228.6mm] Maximum Width: WalzCraft makes every attempt to produce these parts from one solid piece of wood. Due to lumber availability and/or wood species, widths under 9" [228.6mm] may need to be made from two or more edge glued pieces. For widths over 9" [228.6mm], please refer to our **GUPFS** product found in ***Section M.16***.
3	**Length**	Available in 8' [2438.4mm] Lengths, Cut-to-Length and Random Lengths.
		The minimum length for Cut-to-Length pieces is 3" [76.2mm].
		Random length sizes vary between 36" [914.4mm] and 96" [2438.4mm] long. When measured, we round down to the next nearest ½ foot. Minimum quantity of 200 lineal feet.
		Solid wood beveled face frame stock has a standard length of up to 96" [2438.4mm]. Lengths greater than 8' [2438.4mm] are subject to availability. *Please note that the choice of wood species and grade can impact the availability of lengths greater than 8' [2438.4mm].*
4	**Final Sizes**	Be sure to factor the size of the bevel into your overall face frame dimension. End view drawings are to scale.
5	**Bevel Width**	**FS107** and **FS108** use ¼" bevels.

FS101 Face Frame Stock - Beaded



FS105 Face Frame Stock - Beaded



FS103 Face Frame Stock - Beaded



FS102 Face Frame Stock - Beaded



FS106 Face Frame Stock - Beaded



FS104 Face Frame Stock - Beaded



Ordering & Pricing Notes: Face Frame Stock - Beaded

	Ordering Guidelines	
1	**Order Forms**	Please use ***Face Frame Stock Order Form (E•Z Form #9)***.
	Pricing	
1	**Pricing**	Please see ***Section J.1*** of our current **Wholesale Pricing Catalog**.

Technical Notes: Face Frame Stock - Beaded

	Face Frame Options (Chapter J)	
1	**Beaded Face Frame Stock Uses**	Beaded Face Frame Stock is used most often for assembled or ready to assemble (RTA) haunched face frames, with inset doors and drawer fronts.
		The beaded edge is incorporated on one or two sides.
		Beaded Face Frame Stock can also be used as base molding.
	Finish Options (Chapter R)	
1	**Finishing**	Finishing is available.
		Beaded Face Frame Stock will be stained and sealed on the face, back and all edges, and top coated on the face and all edges.
2	**3D Laminate**	Beaded Face Frame Stock is not available with 3D Laminate (RTF).
	Functional Options (Chapter F)	
1	**Miscellaneous Joinery**	Miscellaneous Joinery options (*see illustrations in* ***Section F.2***) are only available on **FS101, FS103** and **FS105** profiles where there is one side without a bead.
		Joinery options will be added to the side of the product without a bead.
	Profile Options (Chapter E)	
1	**Additional Profiles Bead Location**	An additional outside edge cannot be used on the beaded side.
		The bead is not available on the ends.

Notes Continued on Next Page...

Technical Notes: Face Frame Stock - Beaded...continued		
	Sizes / Dimensions	
1	**Thickness**	Available in ¾" [19.1mm], ⅞" [22.2mm] , 1" [25.4mm], 1⅛" [28.6mm] or 1¼" [31.8mm] thicknesses.
2	**Width**	Beaded Face Frame stock is available in a minimum width of 1" [25.4mm] and a maximum width of 9" [228.6mm].
		Minimum Width - Dimensions for Beaded Face Frame Stock when used in Assembled and Ready to Assemble (RTA) Face Frames with ***Pocket Screw*** joinery: • **FS101 =** 1" [25.4mm] • **FS102** = 1¼" [31.8mm] • **FS103** = 1$^{3}/_{32}$" [27.8mm] • **FS104** = 1$^{9}/_{16}$" [39.7mm] • **FS105** = 1$^{1}/_{32}$" [25.8mm] • **FS106** = 1$^{13}/_{32}$" [35.7mm]
		Minimum Width - Dimensions for Beaded Face Frame Stock when used in Assembled and Ready to Assemble (RTA) Face Frames with ***Biscuit or Domino Tenon*** joinery: • **FS101 =** 1⅛" [29.6mm] • **FS102** = 1¼" [31.8mm] • **FS103** = 1⅛" [29.6mm] • **FS104** = 1$^{9}/_{16}$" [39.7mm] • **FS105** = 1⅛" [29.6mm] • **FS106** = 1$^{13}/_{32}$" [35.7mm]
		9" [228.6mm] Maximum Width: WalzCraft makes every attempt to produce these parts from one solid piece of wood. Due to lumber availability and/or wood species, widths under 9" [228.6mm] may need to be made from two or more edge glued pieces. For widths over 9" [228.6mm], please refer to our **GUPFS** product found in ***Section M.16***.
3	**Length**	Available in 8' [2438.4mm] Lengths, Cut-to-Length and Random Lengths.
		The minimum length for Cut-to-Length pieces is 3" [76.2mm].
		Random length sizes vary between 36" [914.4mm] and 96" [2438.4mm] long. When measured, we round down to the next nearest ½ foot. Minimum quantity of 200 lineal feet.
		Solid wood beaded face frame stock has a standard length of up to 96" [2438.4mm]. Lengths greater than 8' [2438.4mm] are subject to availability. *Please note that the choice of wood species and grade can impact the availability of lengths greater than 8' [2438.4mm].*
4	**Final Sizes**	Be sure to factor the size of the bead into your overall face frame dimension. End view drawings are to scale.
5	**Bead Width**	• **FS101, FS102** = ¼" • **FS105, FS106** = $^{5}/_{16}$" • **FS103, FS104** = ⅜"

J

▶ **For PRICING** ▶ *See Section **J.1*** in our current Wholesale Pricing Catalog.

Assembled & Ready to Assemble (RTA) Face Frame

Face Frame Configuration FF179 shown.

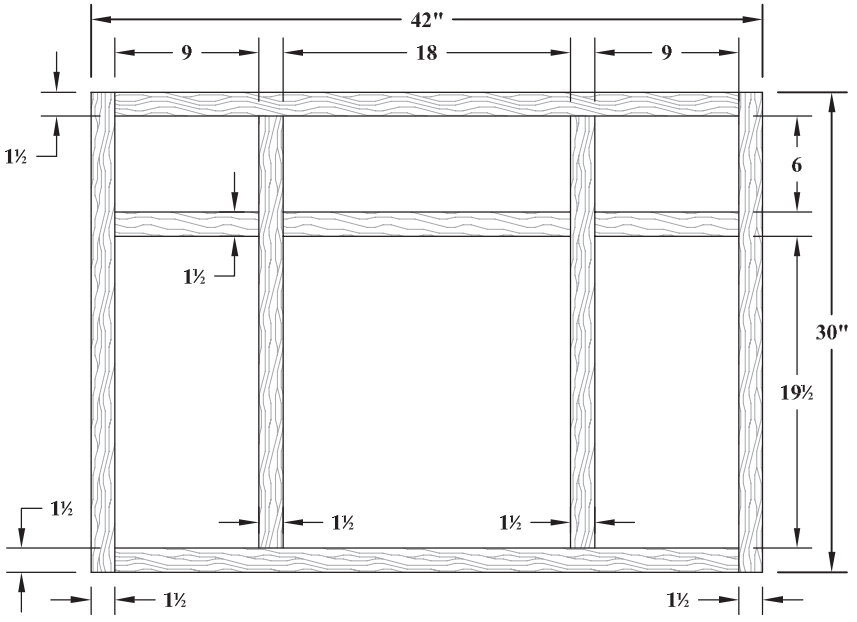

Face Frame Joinery Options

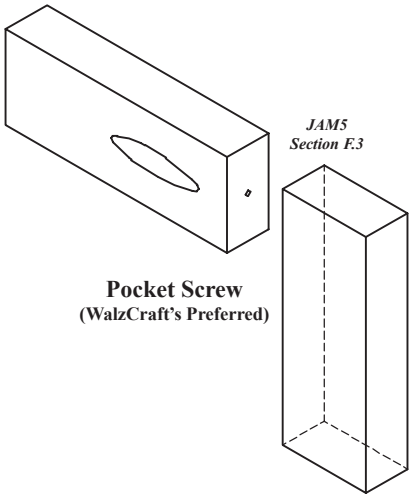

Pocket Screw
(WalzCraft's Preferred)

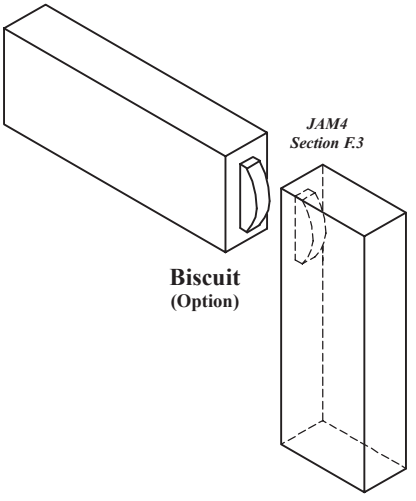

Biscuit
(Option)

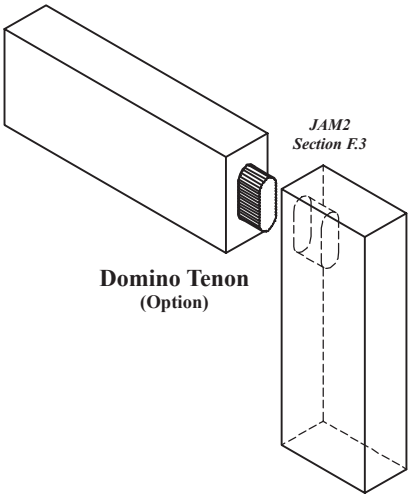

Domino Tenon
(Option)

J

▶ **For PRICING** ▶ *See Section **J.2*** in our current Wholesale Pricing Catalog.

Haunched Joint for Beaded Face Frame

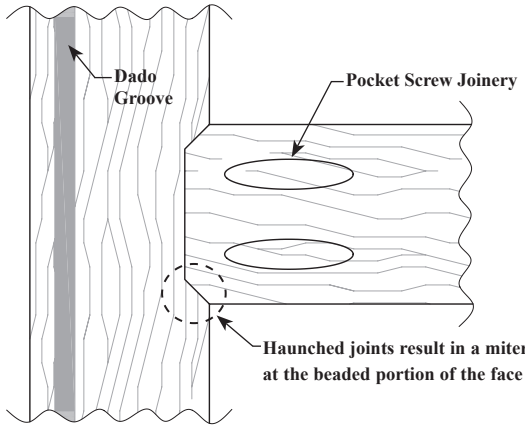

Example of assembled face frame components utilizing beaded face frame stock FS101.

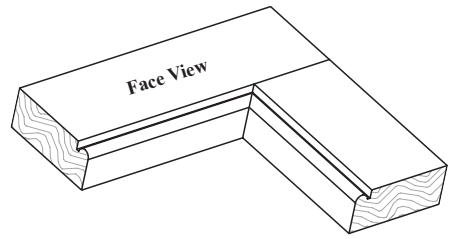

Dado Groove Placement Guidelines for Face Frames

J

Face Frame Configuration FF204 shown.

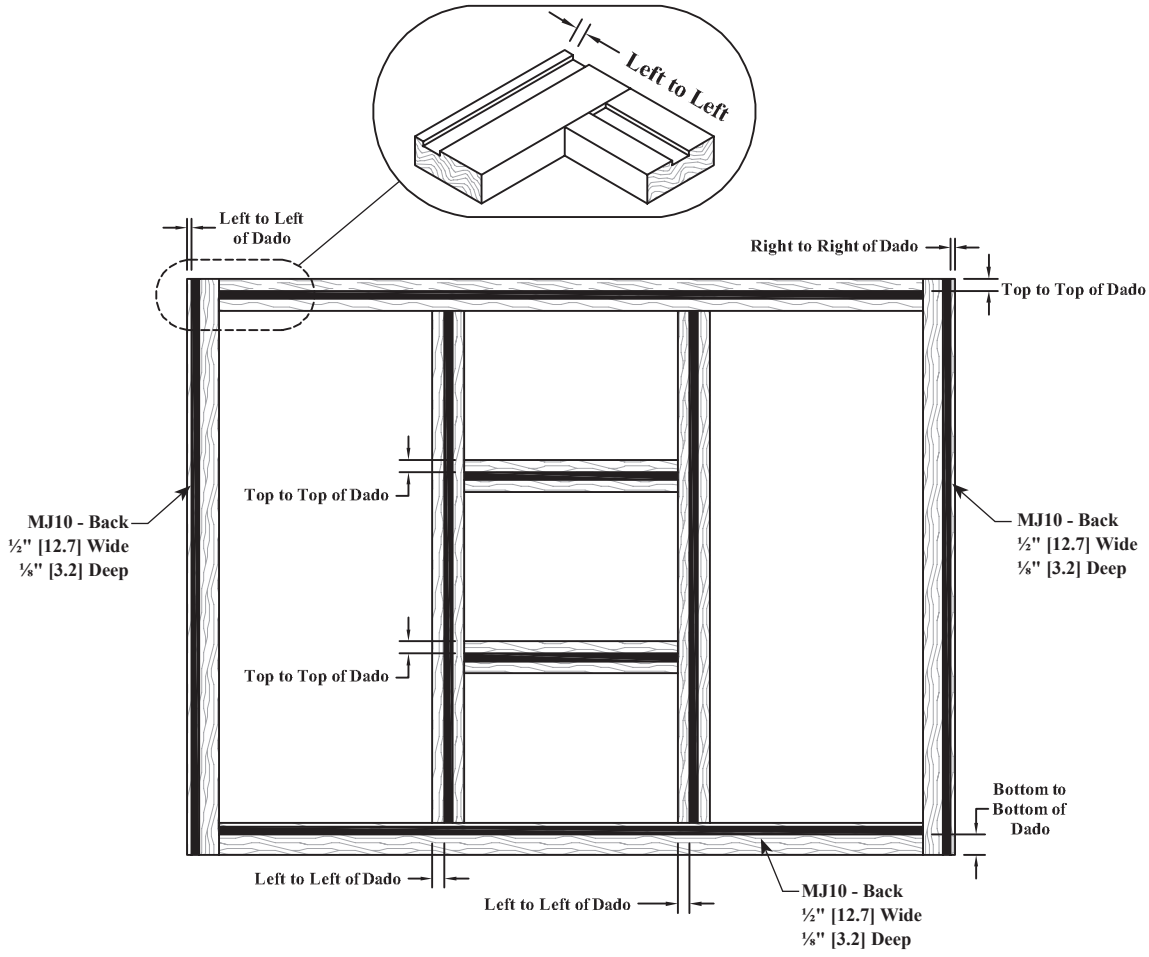

View from Back Side of Face Frame

▶ **For PRICING** ▶ *See Section **J.2*** in our current Wholesale Pricing Catalog.

Cross-Grain Dadoes on Face Frames (Not Recommended)

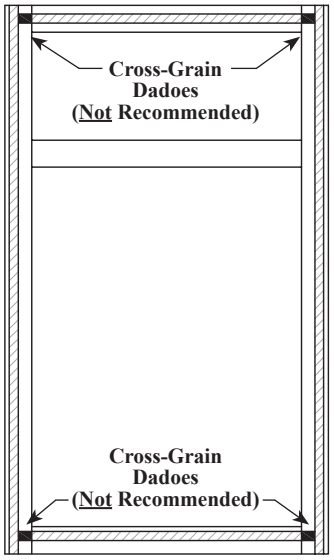

Dadoes on Face Frames

On occasion, we have customers asking WalzCraft to supply face frames with "cross-grain" dadoes on the stiles as shown in the drawing. Over time, WalzCraft has learned that it is far more efficient to simply notch the horizontal cabinet component. Doing so eliminates the costly and potentially unsafe practice of trying to accurately machine a cross-grain dado on a small part. WalzCraft has recommended the "notching method" to customers in the past, and has also successfully built cabinets for in house purposes using this method. Please consider this method when requesting face frames with dadoes.

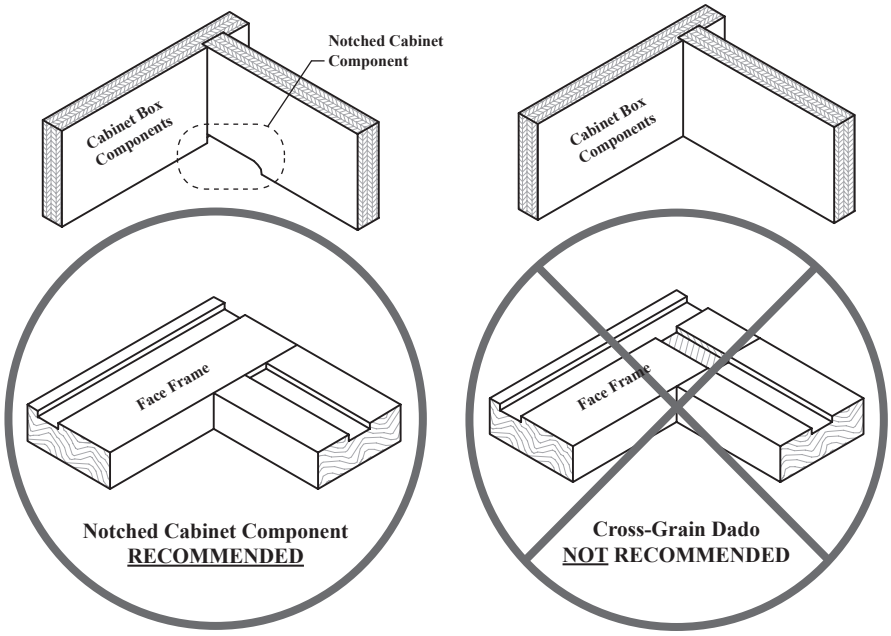

J

▶ For PRICING ▶ *See Section **J.2*** in our current Wholesale Pricing Catalog.

® WalzCraft® .com © (Phone) 1-800-237-1326 6:00AM - 4:30PM CST (24 Hour Fax) 1-608-781-3667

Typical "Base" or "Upper" Cabinet Face Frame Configurations

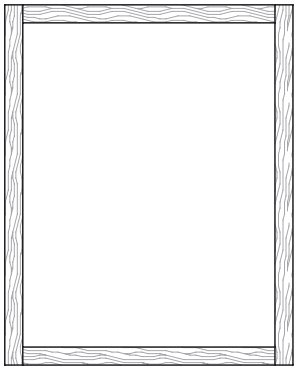

FF100

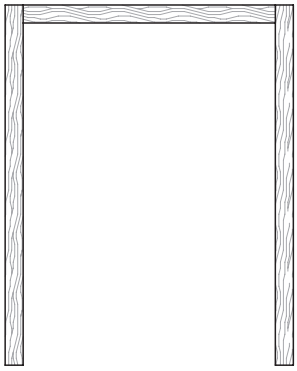

FF109

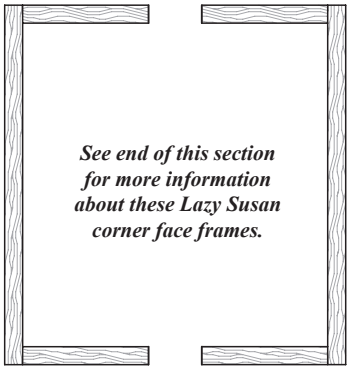

FF111 **FF112**

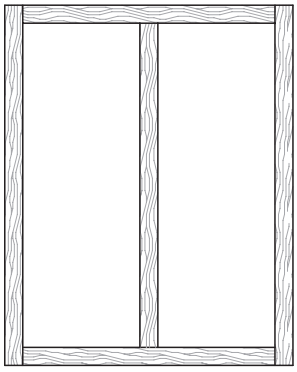

FF106

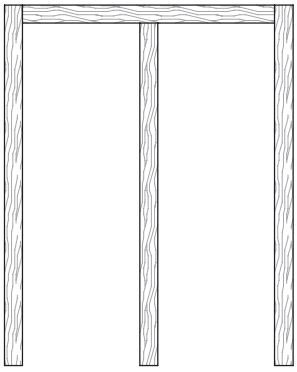

FF129

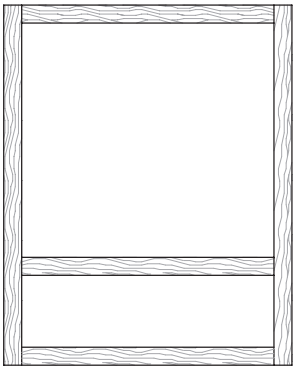

FF296

▶ **For PRICING** ▶ *See Section **J.2*** in our current Wholesale Pricing Catalog.

Typical "Base" Cabinet Face Frame Configurations

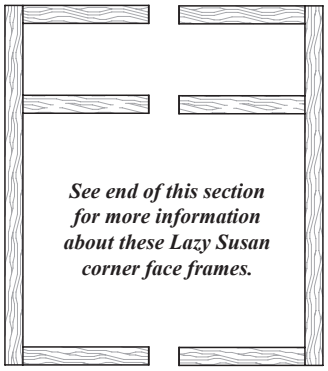

FF113 **FF114**

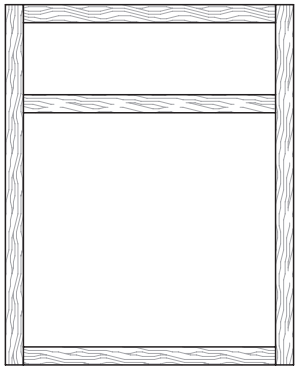

FF101

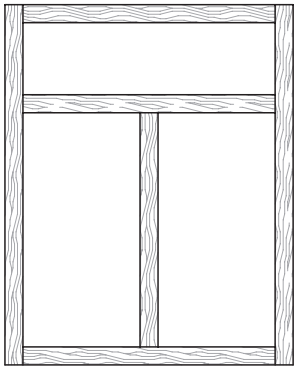

FF107

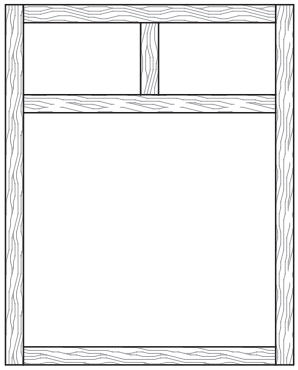

FF105

J

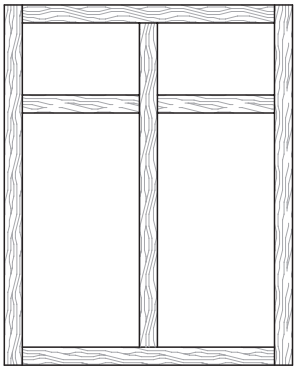

FF108

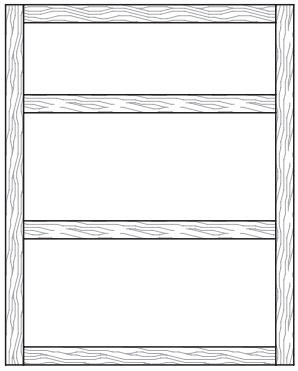

FF103

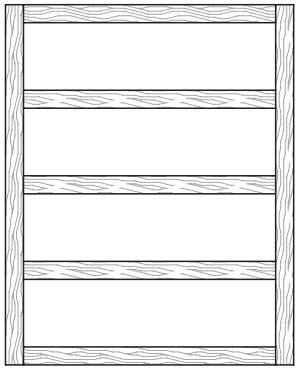

FF104

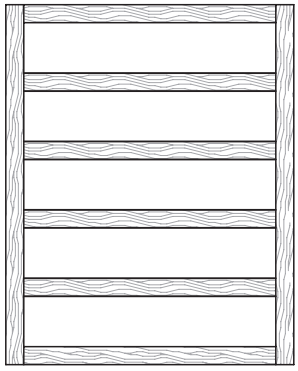

FF123

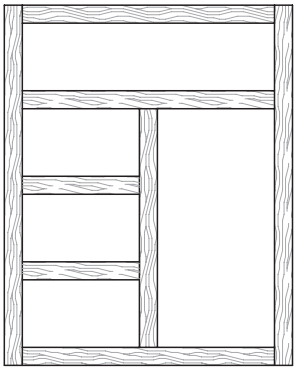

FF168

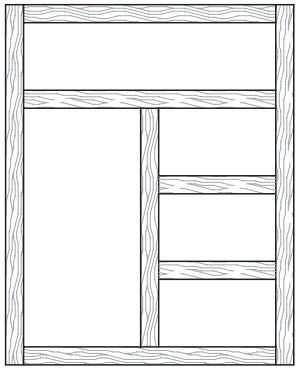

FF169

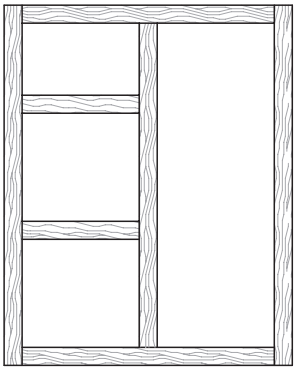

FF141

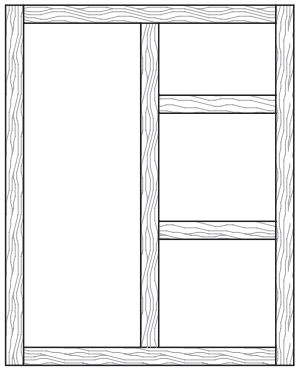

FF142

▶ **For PRICING** ▶ *See Section **J.2*** in our current Wholesale Pricing Catalog.

® WalzCraft® .com © (Phone) 1-800-237-1326 6:00AM - 4:30PM CST (24 Hour Fax) 1-608-781-3667

Typical "Base" Cabinet Face Frame Configurations

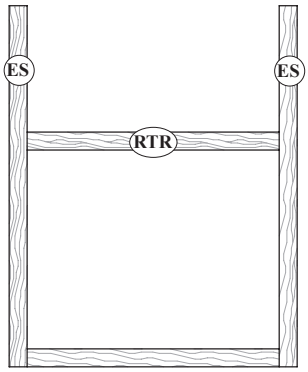

FF269

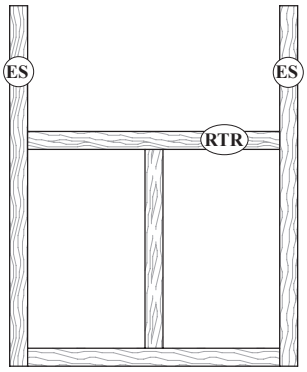

FF137

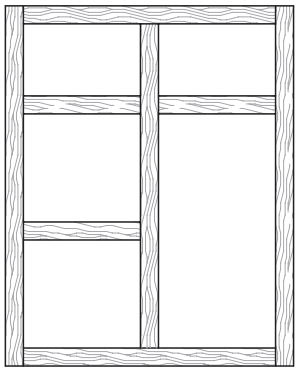

FF144

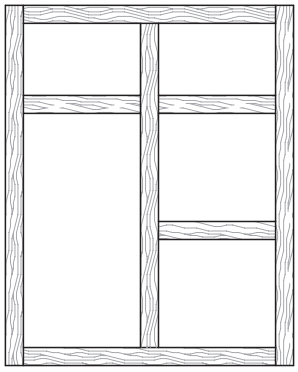

FF145

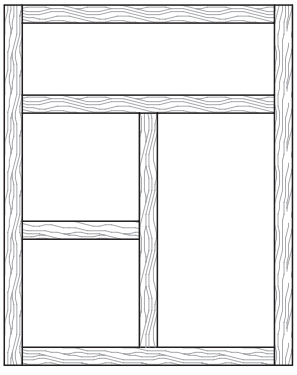

FF147

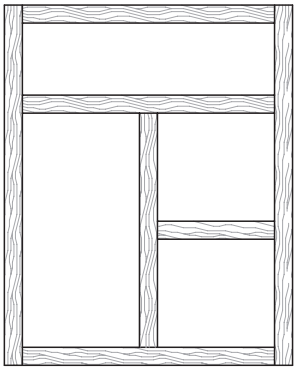

FF148

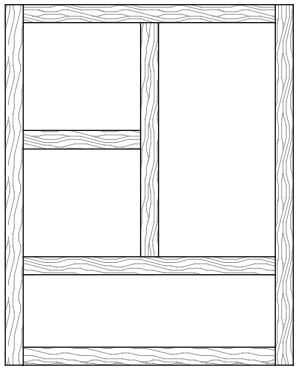

FF156

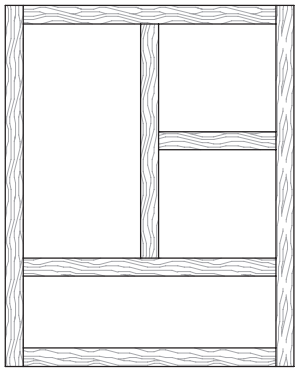

FF157

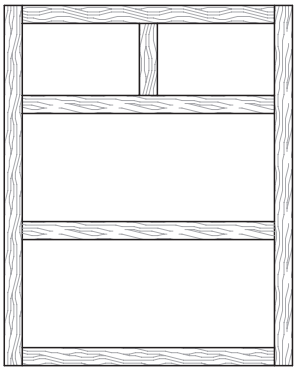

FF158

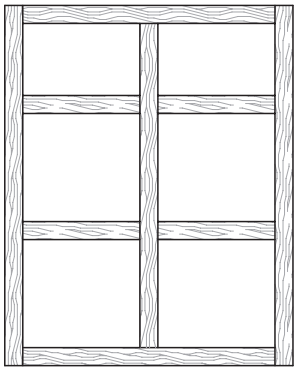

FF140

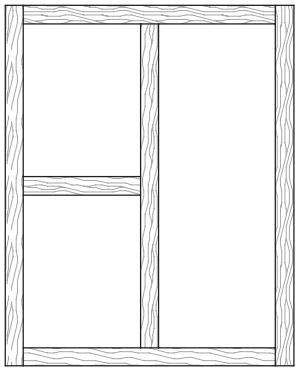

FF135

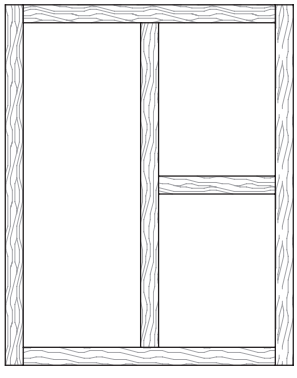

FF136

▶ **For PRICING** ▶ *See Section **J.2*** in our current Wholesale Pricing Catalog.

Typical "Base" Cabinet Face Frame Configurations

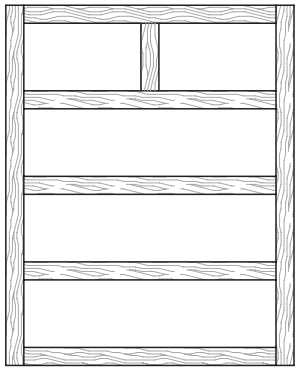

FF170

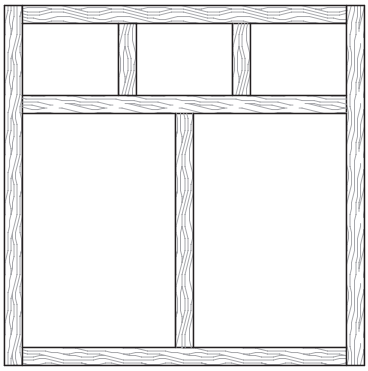

FF184

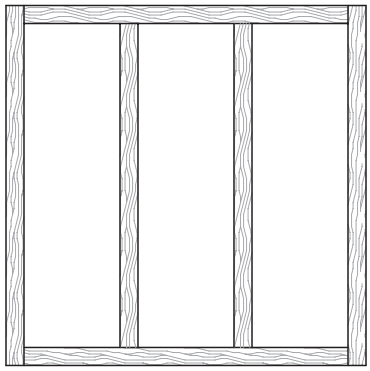

FF176

J

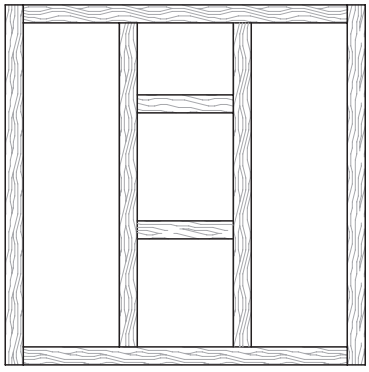

FF204

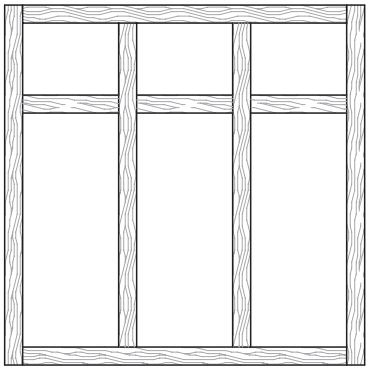

FF179

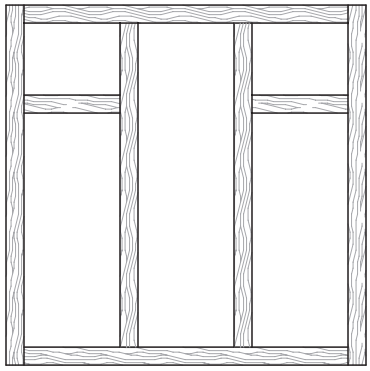

FF180

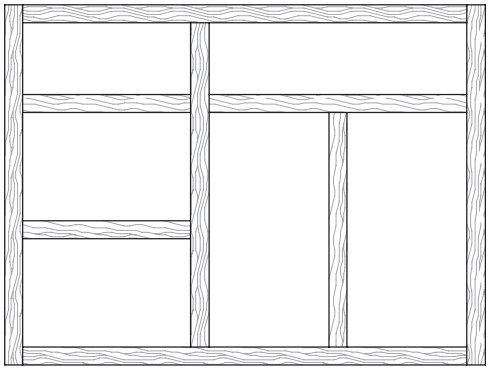

FF213

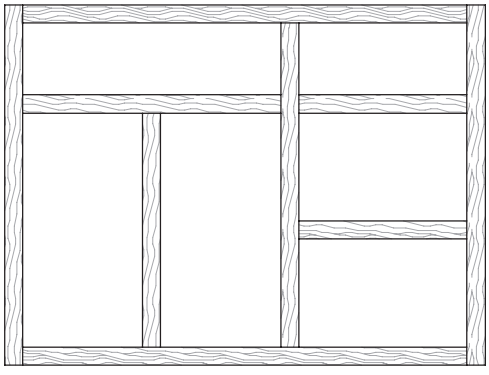

FF214

▶ **For PRICING** ▶ *See Section **J.2*** in our current Wholesale Pricing Catalog.

® WalzCraft® .com © (Phone) 1-800-237-1326 6:00AM - 4:30PM CST (24 Hour Fax) 1-608-781-3667

Typical "Base" Cabinet Face Frame Configurations

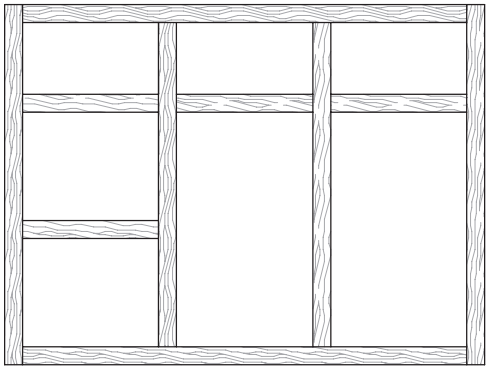

FF202

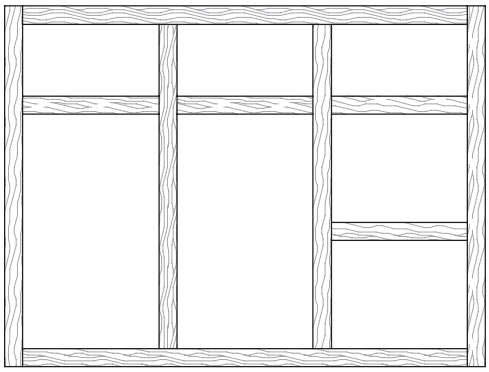

FF203

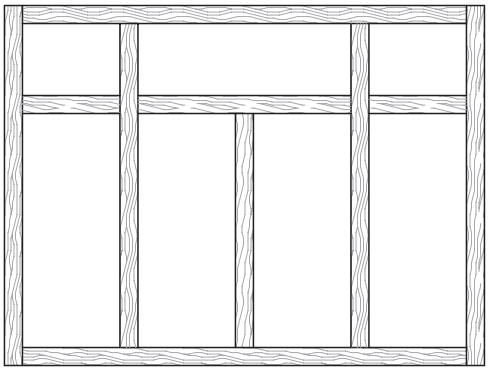

FF242

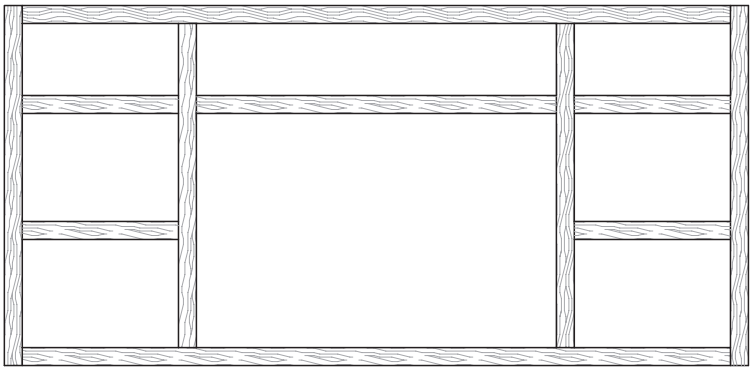

FF199

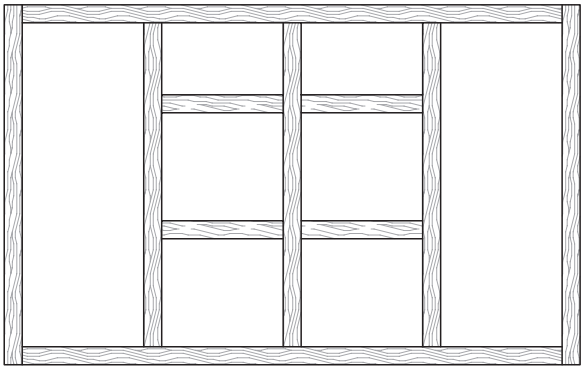

FF255

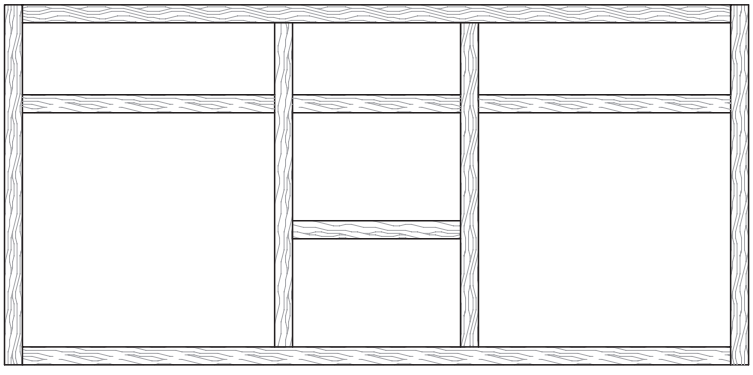

FF200

▶ **For PRICING** ▶ *See Section **J.2*** in our current Wholesale Pricing Catalog.

Typical "Upper" Cabinet Face Frame Configurations

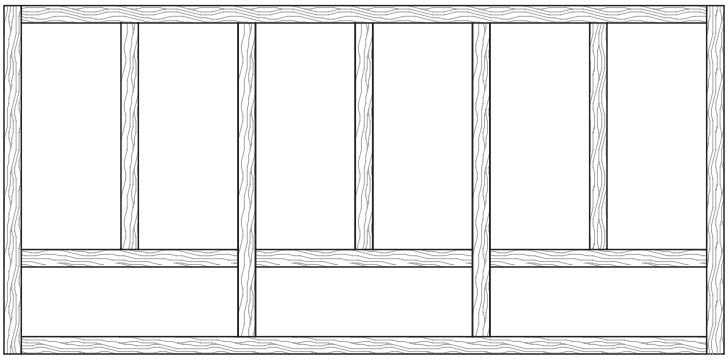

FF294

J

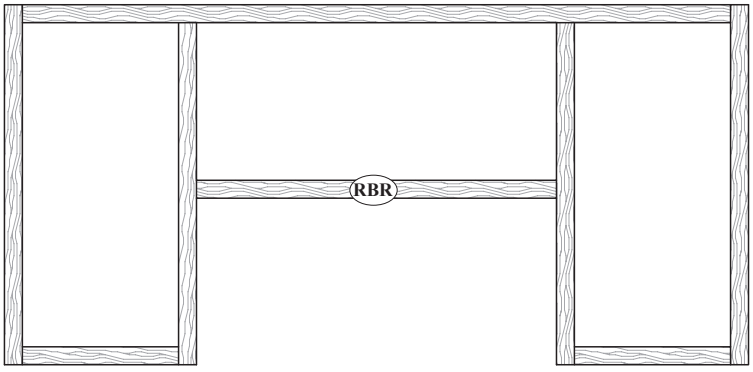

FF196

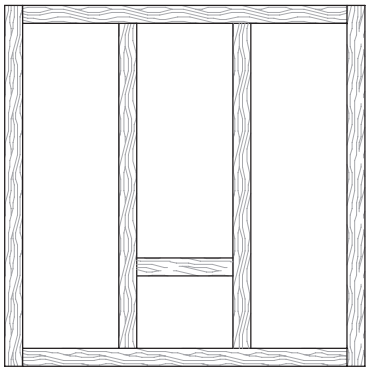

FF295

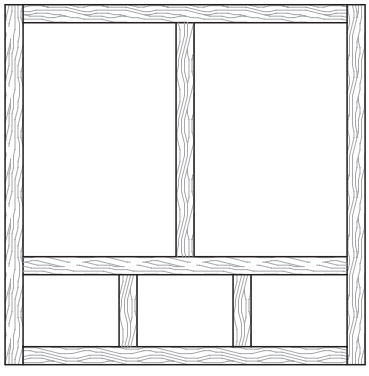

FF187

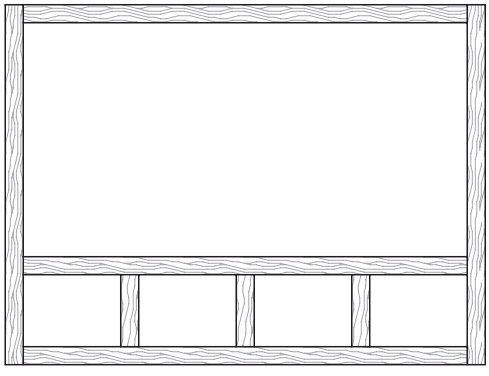

FF249

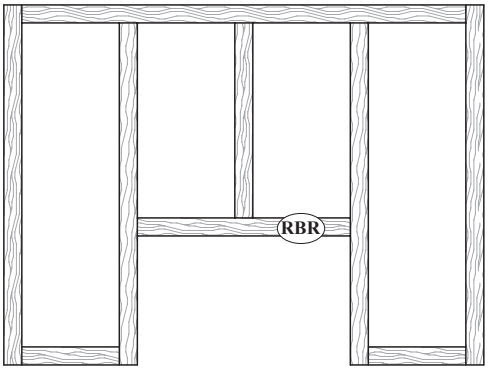

FF250

▶ **For PRICING** ▶ *See Section **J.2*** in our current Wholesale Pricing Catalog.

Typical "Tall" Cabinet Face Frame Configurations

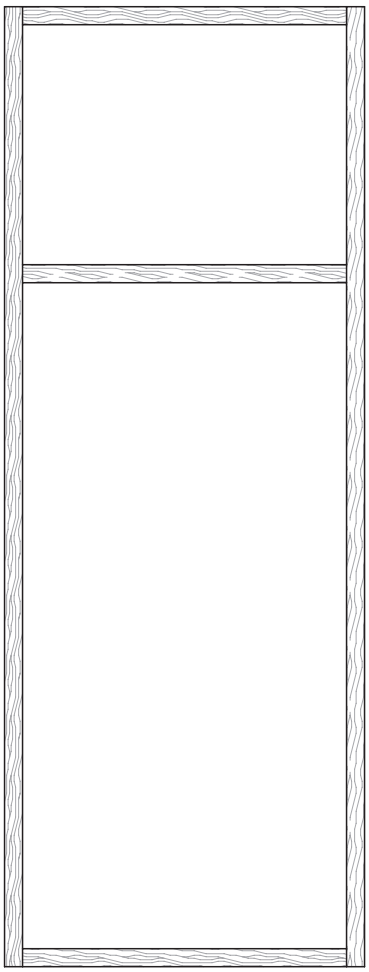

FF101

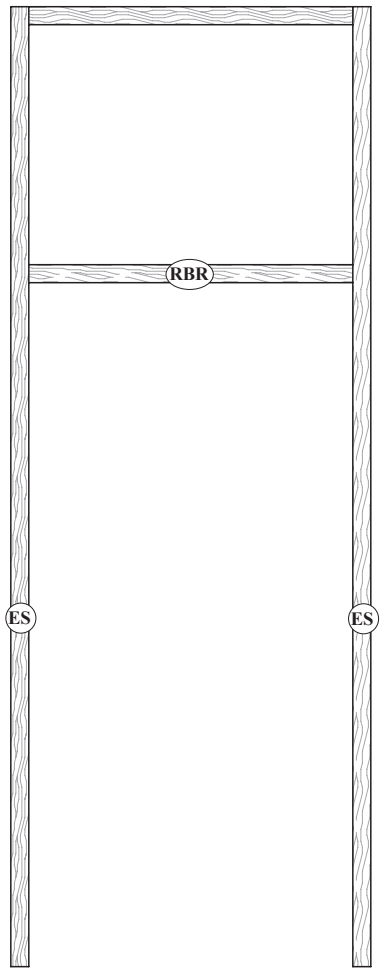

FF268

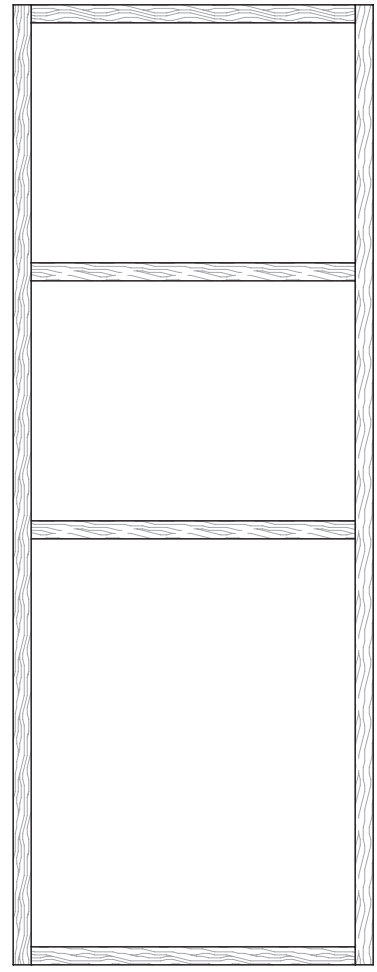

FF103

▶ **For PRICING** ▶ *See Section **J.2*** in our current Wholesale Pricing Catalog.

Typical "Tall" Cabinet Face Frame Configurations

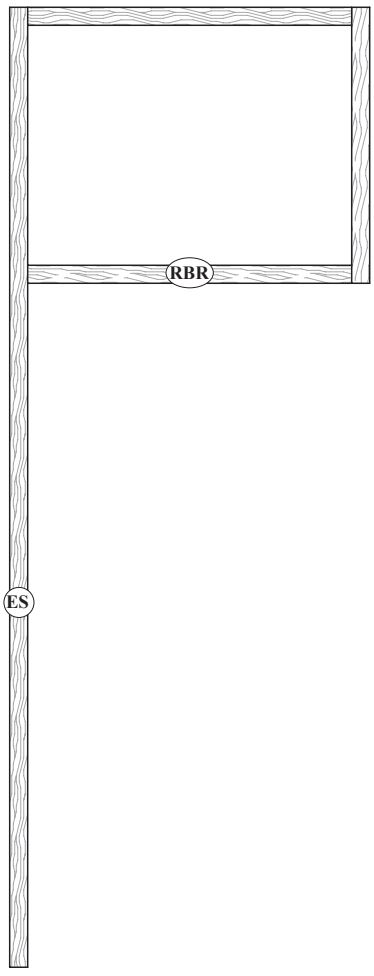

FF270

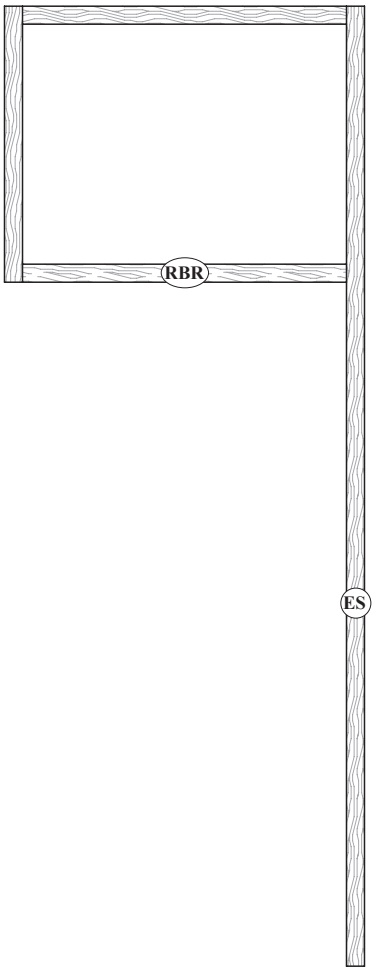

FF271

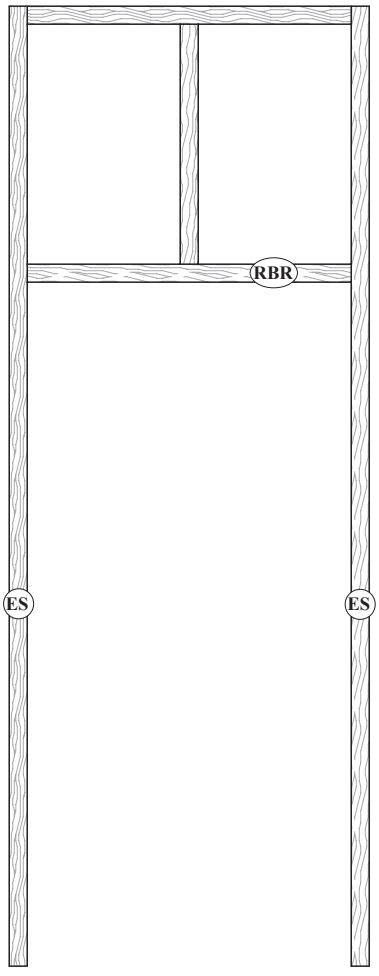

FF138

▶ **For PRICING** ▶ *See Section **J.2*** in our current Wholesale Pricing Catalog.

® WalzCraft® .com © (Phone) 1-800-237-1326 6:00AM - 4:30PM CST (24 Hour Fax) 1-608-781-3667

Typical "Tall" Cabinet Face Frame Configurations

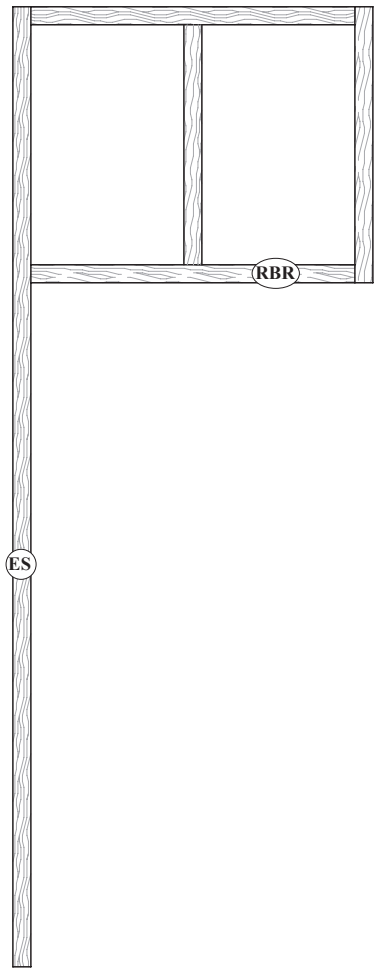

FF277

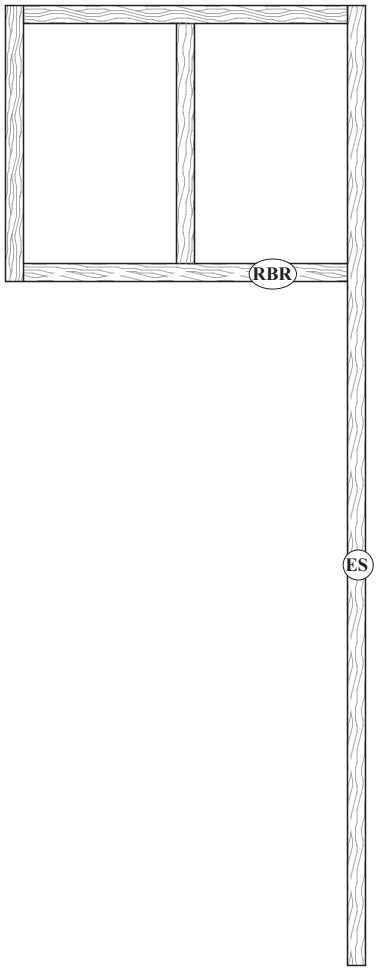

FF278

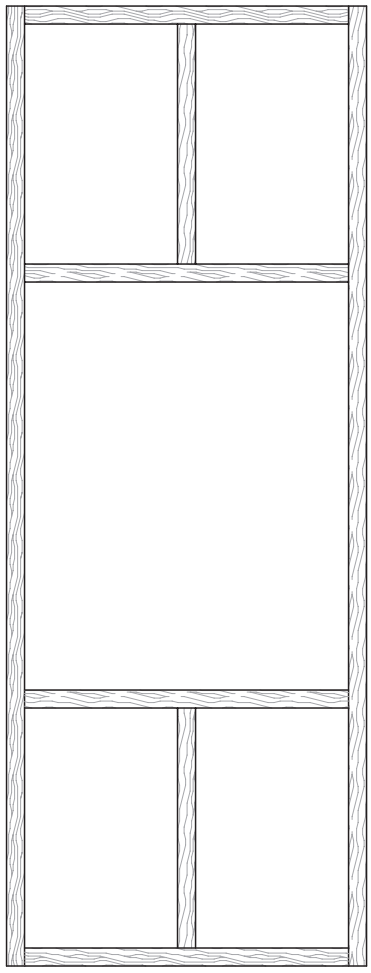

FF143

▶ **For PRICING** ▶ *See Section **J.2*** in our current Wholesale Pricing Catalog.

Arched Top Face Frame Configurations

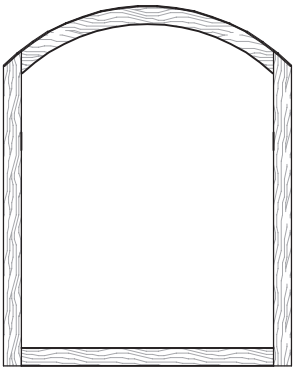

FF297

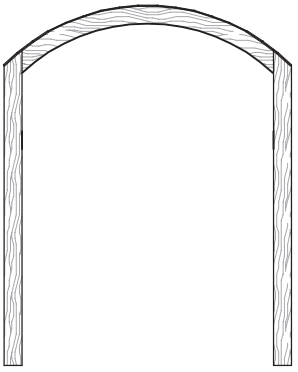

FF298

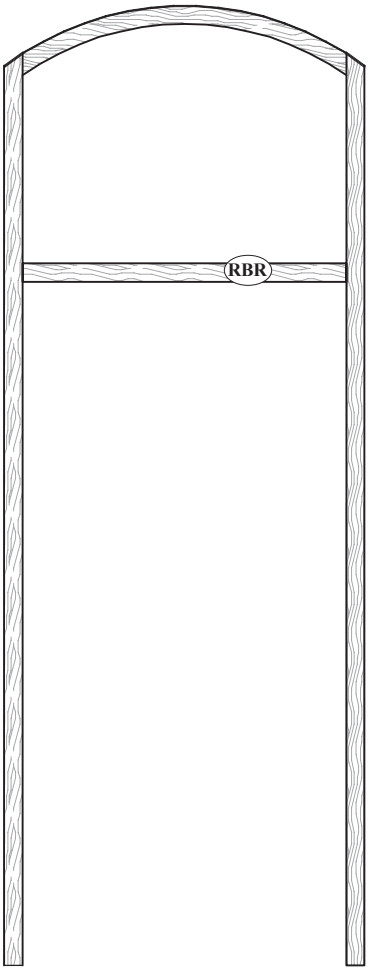

FF299

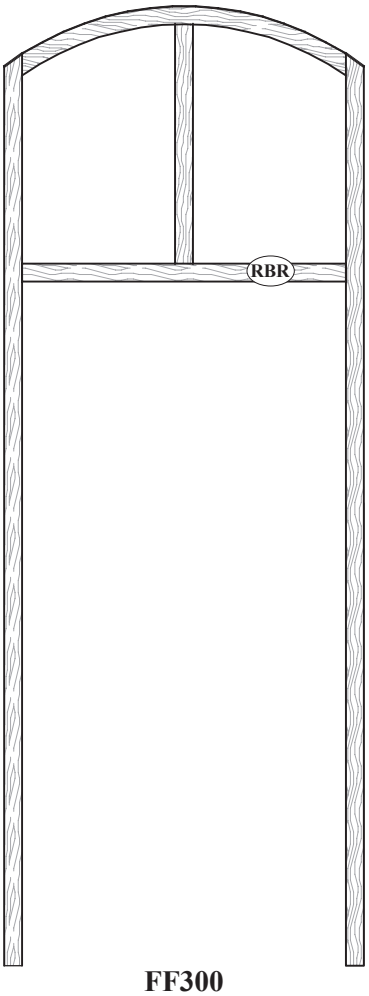

FF300

J

▶ **For PRICING** ▶ *See Section **J.2*** in our current Wholesale Pricing Catalog.

90° "Inside" Corner Face Frame Configurations (Lazy Susan)

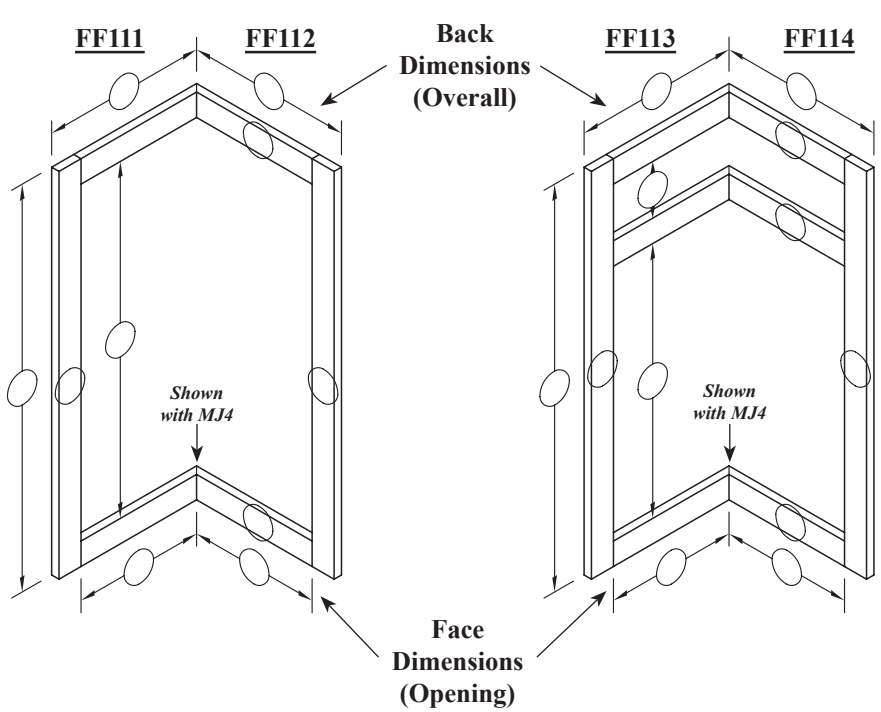





J

90° "Outside" Corner Face Frame Configurations (Lazy Susan)

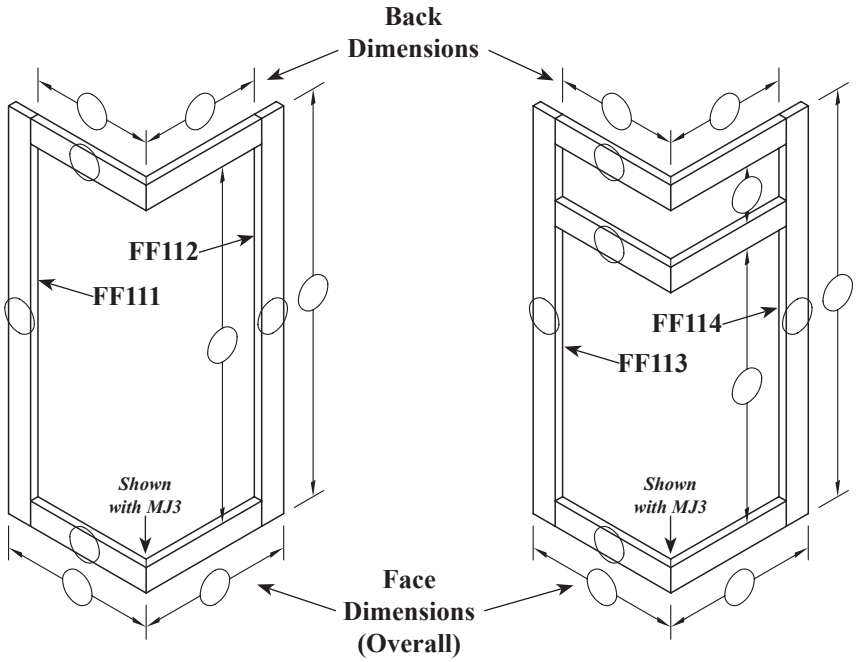





▶ **For PRICING** ▶ *See Section **J.2*** in our current Wholesale Pricing Catalog.

Ordering & Pricing Notes: Assembled & Ready to Assemble (RTA) Face Frames

Ordering Guidelines

1	**Order Forms**	Please use ***Assembled & Ready to Assemble (RTA) Face Frame Order Forms (E•Z Forms #15 & 15.1)***.
		You may choose to submit your own configuration drawings in place of ***E•Z Form #15.1***. • Please include ***E•Z Form #15*** with your configuration drawings.
2	**Ordering Information**	When ordering, please specify: • Face frame stock number (ex: **FS100**). • Face frame configuration number (ex: **FF107**). ◦ For 90° Inside Corner and 90° Outside Corner face frames, please provide numbers for both the left half and the right half (ex: **FF111** and **FF112**). • Face frame thickness. • Overall width of parts. • Opening dimensions between each part. • Overall width and height dimensions. • Assembled or Ready to Assemble (RTA) construction. • Joinery Method: Pocket Screw, Biscuit or Domino Tenon. • Location of any Miscellaneous Joinery options (**MJ's**) and / or Joint Assembly Methods (**JAM's**).
3	**Dimensions Needed for Ordering**	It is very important that we have all of the dimensions. Overall face frame dimensions ***must equal*** the total of your part sizes and opening sizes. The drawing on ***page J.2.1*** **(FF179)** indicates all of the sizes needed to properly construct a face frame, whether assembled or Ready to Assemble (RTA).
4	**Part Name Definitions**	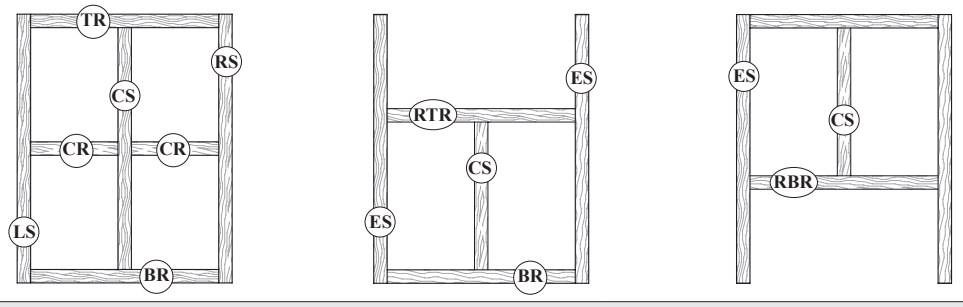

When ordering face frames with similar configurations, parts will use the following abbreviations:

TR: Top Rail	**LS: Left Stile**	**ES: Extended Stile**
BR: Bottom Rail	**RS: Right Stile**	**RTR: Repositioned Top Rail**
CR: Center Rail	**CS: Center Stile**	**RBR: Repositioned Bottom Rail**

Pricing

1	**Pricing**	Please see ***Section J.2*** of our current **Wholesale Pricing Catalog**.

Technical Notes: Assembled & Ready to Assemble (RTA) Face Frames

Face Frame Options (Chapter J)

1	**Assembled Face Frames**	Pocket Screw joinery is WalzCraft's preferred method and first choice for assembly. When using Pocket Screw joinery, assembled face frames are precision bored and joints are glued and screwed together.
		WalzCraft, under certain conditions, will occasionally use a biscuit rather than a pocket screw to assemble a particular joint. This is most commonly done when center rails or center stiles are narrow, or when dadoes in the rear of a face frame are placed close to the joint. When this occurs on a job that is otherwise pocket screwed, the few joints that are biscuit joined are done so at no additional charge to the customer.
		For an additional charge, Biscuit joinery or Domino Tenon joinery may be used at all joints in lieu of Pocket Screws. Please indicate "Biscuit Joinery" or "Domino Tenon Joinery" at time of order.
		Arched top face frame configurations are only available with Domino Tenon joinery.
		After assembly, frames are sanded to 220 grit and fladder sanded to 180 grit.
		Assembled Convex/Concave face frames are available with all face frame profile options (**FS100-FS108**).
2	**Ready To Assemble (RTA) Face Frames**	Pocket Screw joinery is WalzCraft's preferred method and first choice for RTA frames. When using Pocket Screw joinery, RTA Face Frames are precision bored and shipped with screws specifically designed for use on the backside of the face frame to conjoin the parts.
		For an additional charge, Biscuit joinery or Domino Tenon joinery may be used at all joints in lieu of Pocket Screws. Please indicate "Biscuit Joinery" or "Domino Tenon Joinery" at time of order.
		Each joint is labeled and a drawing is provided with assembly guidelines.

Notes continued on next page…

Technical Notes: Assembled & Ready to Assemble (RTA) Face Frames.continued

Face Frame Options (Chapter J)...continued

3	**Integral Bead Option**	When ordering, specify the **FS101**, **FS103** or **FS105** option as shown in ***Section J.1***. *(Please factor the size of the bead into your overall face frame dimension.)* If integral bead molding ***is not*** needed in every opening, an applied option may be substituted for the entire face frame. See ***Section J.5*** for Beaded Applied Molding Options.
		Stile and rail joints are "haunched". See illustration at beginning of this section.
4	**Custom Applications**	For custom application requests, please fax your drawings and order forms to our Customer Support Team or email drawings to: **customersupport@WalzCraft.com**.
5	**90° Corner Face Frames**	Must be ordered as separate left (**FF111** or **FF113**) and separate right (**FF112** or **FF114**) units. • Units will be shipped as a separate left and a separate right face frame to be assembled by customer. • The rails utilize a standard butt joint where they meet at the inside or outside corner, unless otherwise specified. See ***Section F.2*** for optional 45° Inside Corner Miter Joint (**MJ4**), or optional 45° Outside Corner Miter Joint (**MJ3**). • See ***Section F.3*** for optional Joint Assembly Methods. WalzCraft prefers the Hoffmann Dovetail Joint Assembly Method (**JAM1**) when using the 45° Inside Corner Miter Joint (**MJ4**) or the 45° Outside Corner Miter Joint (**MJ3**).
		When WalzCraft is finishing with a SolidTone® color, Outside Corner Face Frames ***must*** be shipped completely assembled. • Outside corner face frames are assembled first, then the joints are sanded and the entire frame is painted. • This procedure helps prevent any visible seams that may occur at the joints. • *Complete assembly is not necessary for inside corner face frames.*

Finish Options (Chapter R)

1	**Stain**	Face Frames will be stained and sealed on the face, back and all edges, and top coated on the face and all edges only.
2	**Primed Only for Paint**	Ready to Assemble (**RTA**) face frames are available with a "Primed Only for Paint" finish.
3	**SolidTone®**	Ready to Assemble (**RTA**) face frames are ***not*** available with a SolidTone® finish.
4	**3D Laminate**	Please submit your requests for assembled or RTA face frames to our Customer Support Team.

Functional Options (Chapter F)

1	**Miscellaneous Joinery - Dado / Rabbet Grooves**	Dado and rabbet groove options are available.
		When ordering, please specify the MJ option, along with the width, depth and placement from each outside edge of the face frame. See ***Miscellaneous Joinery Section F.2*** for all dado and rabbet groove options.
		To determine your dado groove width, you will need to take into consideration the thickness of the sidewall material that you will be using to insert into the groove.

Profile Options (Chapter E)

1	**Outside Edge Profiles**	Assembled face frames may be available with some outside edge profiles from ***Section E.15*** when using biscuit or domino tenon joinery.
		Please submit your requests and drawings to our Customer Support Team.

Sizes / Dimensions

1	**Tolerances**	Assembled face frames will have a size tolerance +/- 1mm on the overall sizes and +/- 1mm within each opening.
2	**Stile & Rail Sizes**	When specifying the stile and/or rail widths, please provide WalzCraft with the overall dimension (ie: if profile is beaded, the width should include the bead).
		All face frames are drawn at 1½" [38.1mm] wide part sizes, unless otherwise noted.
		• **For part widths greater than 9" [228.6mm] up to 12" [304.8mm]** ◦ Parts will be made from two or more edge glued pieces and will incur additional fees. • **For part widths greater than 12" [304.8mm]** ◦ Please submit requests to our Customer Support Team; these will be subject to approval and may incur additional design charges. ◦ Other solutions may be available. Please **see *Section J.7*** for more information on Blind Corner Extensions.
3	**Thicknesses**	Available in ¾" [19.1mm], ⅞" [22.2mm], 1" [25.4mm], 1⅛" [28.6mm] and 1¼" [31.8mm] thicknesses.
4	**Assembly Screws**	Parts less than 2" [50.8mm] wide will have one pocket screw per joint.

Wood Specie Options (Chapter S)

1	**Grain & Color Matching**	Assembled face frames are only grain and color matched on the faces. All natural wood characteristics are acceptable on the inside edges.

▶ **For PRICING** ▶ *See Section **J.2*** in our current Wholesale Pricing Catalog.

Face Frame Options - Square/Tapered Foot

Square Foot Option for Face Frames - SFO100

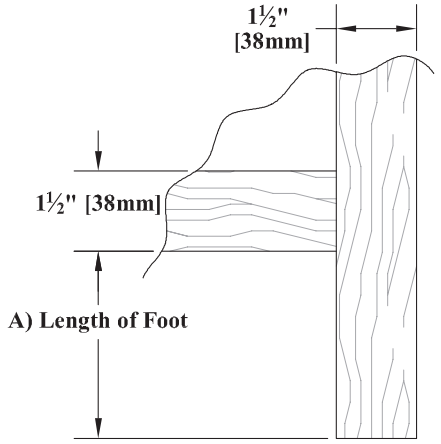

Shown with foot length of 3½" [88.9mm].

J

Tapered Foot Options for Face Frames - TFO100

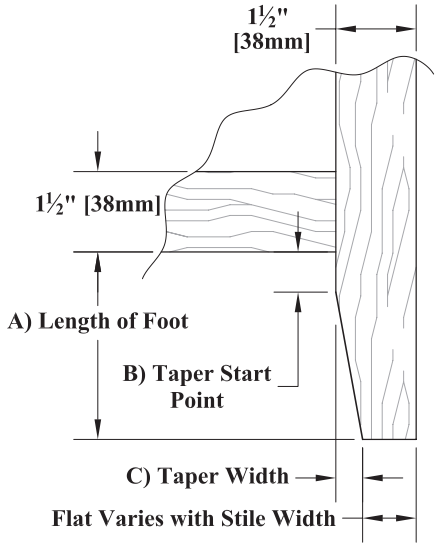

Shown with foot length of 3½" [88.9mm], taper start point of ¾" [19.1mm], and taper width of ½" [12.7mm].

Tapered Foot Options for Face Frames - TFO200

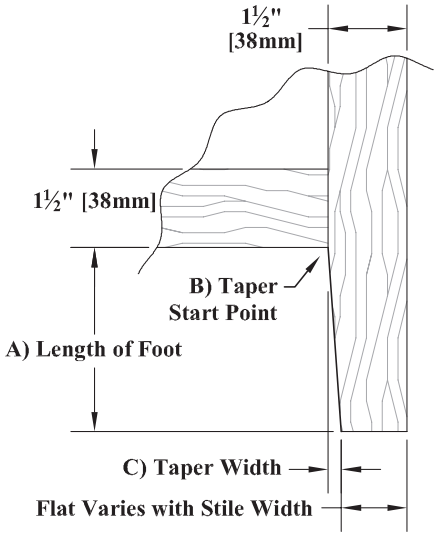

Shown with foot length of 3½" [88.9mm], taper start point of 0", and taper width of ¼" [6.4mm].

▶ **For PRICING** ▶ *See Section **J.3*** in our Wholesale Pricing Catalog.

Example: FF108 Face Frame Configuration with Taper Foot Option (TFO100)

Shown with 1½" wide stiles, taper foot length of 3½", taper start point of ¾", and taper width of ½".

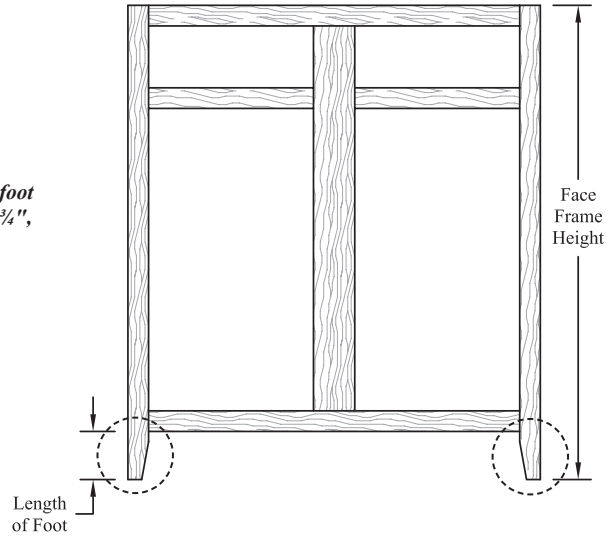

Ordering & Pricing Notes: Face Frame Options - Square / Tapered Foot		
Ordering Guidelines		
1	**Order Forms**	Please use ***Assembled & Ready to Assemble (RTA) Face Frame Order Forms (E•Z Forms #15 & 15.1)***.
		Fax your face frame configuration drawings along with your order forms to our Customer Support Team or email drawings to: **customersupport@WalzCraft.com**.
2	**Ordering Information**	**Length of Foot**: Typical lengths for this application are 3½" [88.9mm] or 4" [101.6mm].
		Taper Start Point (TFO100, TFO200): Please denote dimension from bottom of face frame, as shown in the illustration on previous page.
		Taper Width (TFO100, TFO200): Remaining flat dimension will vary with stile width.
Pricing		
1	**Pricing**	Please see ***Section J.3*** of the **Wholesale Pricing Catalog**.

Technical Notes: Face Frame Options - Square / Tapered Foot		
Sizes / Dimensions		
1	**Face Frame Height**	When applying the Square or Tapered Foot options to a face frame, the face frame height ***must include*** the length of the foot, as shown in the **FF108** Face Frame Configuration illustrated above.

Miscellaneous Joinery Options for Face Frames

MJ3 — 90° "Outside Corner" (45° Miter Cut)

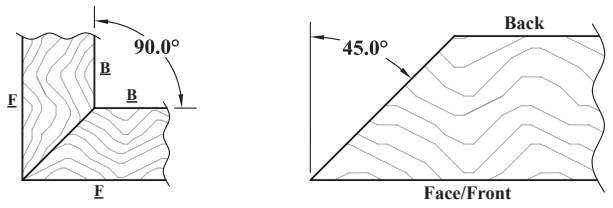

MJ4 — 90° "Inside Corner" (45° Miter Cut)

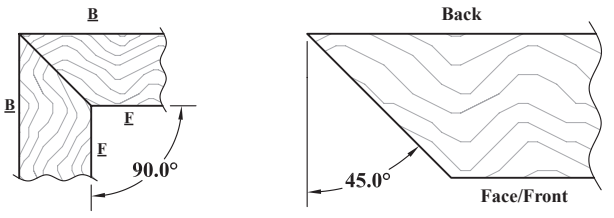

MJ10 — 90° "Outside Corner" (Dado Option)

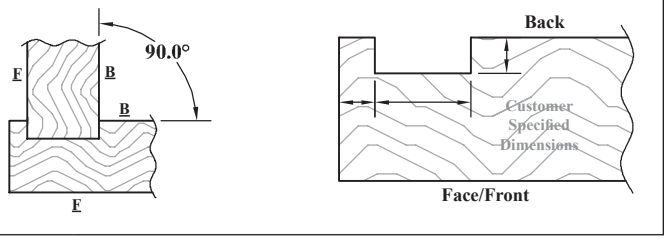

MJ18 — 90° "Inside Corner" (Dado Option)

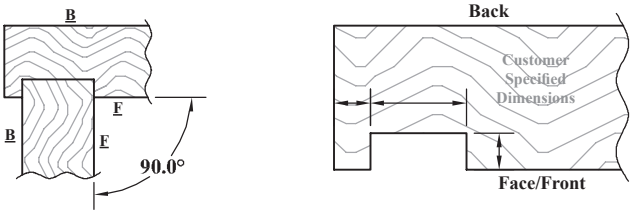

J

Dado Groove Placement Guidelines

Face Frame Configuration FF204 shown.

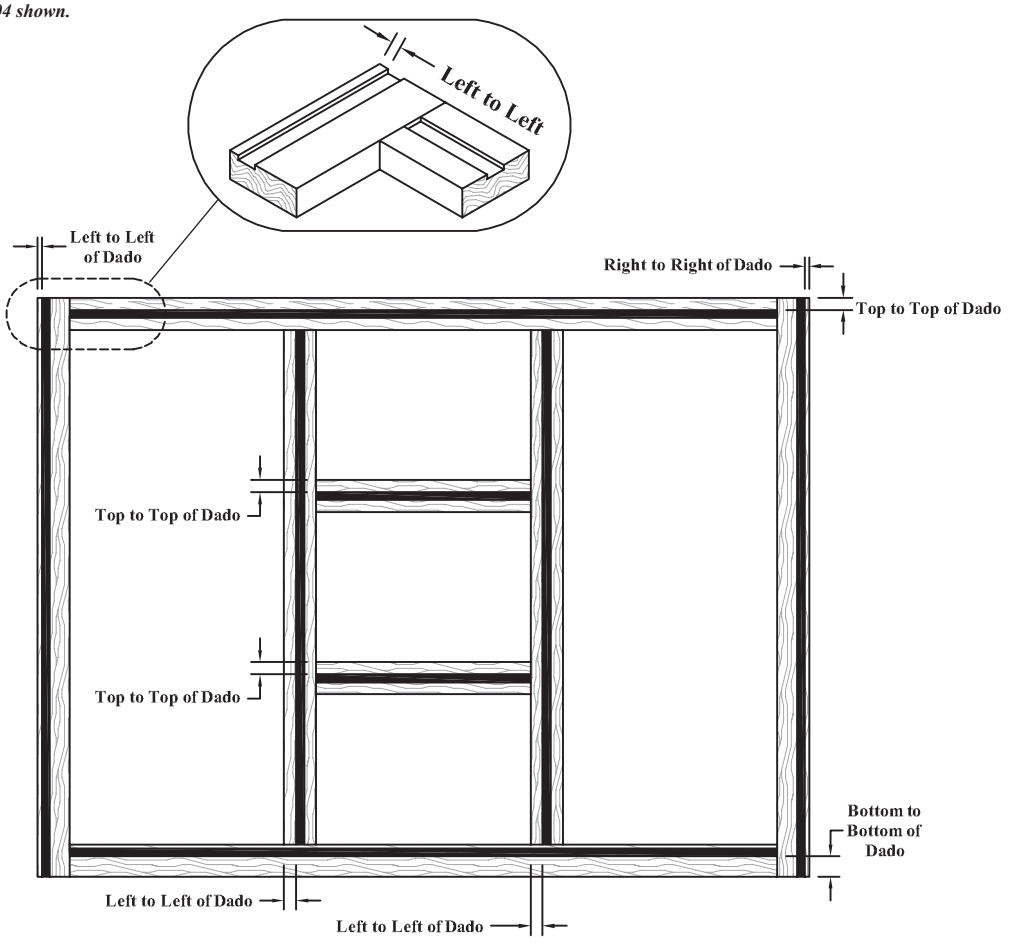

View from Back Side of Face Frame

® WalzCraft® .com © (Phone) 1-800-237-1326 6:00AM - 4:30PM CST (24 Hour Fax) 1-608-781-3667

Ordering & Pricing Notes: Face Frame Options - Miscellaneous Joinery		
Ordering Guidelines		
1	**Order Forms**	Please use ***Assembled & Ready to Assemble (RTA) Face Frame Order Forms (E•Z Forms #15 & 15.1)***.
		Fax your face frame configuration drawings along with your order forms to our Customer Support Team at 1-608-781-3667 or email drawings to: **customersupport@WalzCraft.com**.
2	**Ordering Information**	Specify the MJ option, along with the width, depth and placement from each outside edge of the face frame. See ***Miscellaneous Joinery Section F.2*** for all joinery options.
		To determine your dado groove width, you will need to take into consideration the thickness of the sidewall material that you will be using to insert into the groove.
Pricing		
1	**Pricing**	Please see ***Section J.4*** of our current **Wholesale Pricing Catalog**.

J

® WalzCraft® .com © (Phone) 1-800-237-1326 6:00AM - 4:30PM CST (24 Hour Fax) 1-608-781-3667

"Beaded" Applied Molding Options for Face Frames

¾" [19.1mm] Inset Bead

#825
PC: AM101
Sq Ft: .70



#1334
PC: AM101
Sq Ft: .70

1" [25.4mm] Inset Bead

#834
PC: M103
Sq Ft: .70

#1352
PC: M103
Sq Ft: .70

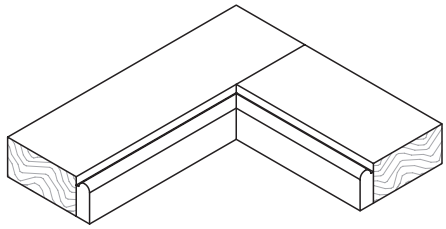

#846
PC: AM103
Sq Ft: .70

#851
PC: AM103
Sq Ft: .70

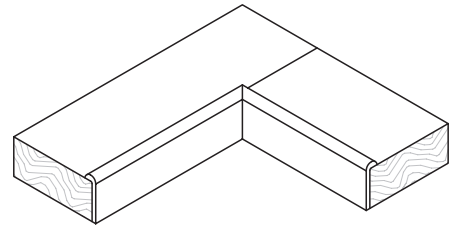

J

Ordering & Pricing Notes: Face Frame Options - Beaded Applied Molding

Ordering Guidelines

1	**Order Forms**	Please use ***Assembled & Ready to Assemble (RTA) Face Frame Order Forms (E•Z Forms #15 & 15.1)***.
		Fax your face frame configuration drawings along with your order forms to our Customer Support Team or email drawings to: **customersupport@WalzCraft.com**.
2	**Ordering Information**	Beaded applied molding drawings above are to scale. Order with the bead factored into the overall width dimension of your face frame parts.

Pricing

1	**Pricing**	Please see ***Section J.5*** of our current **Wholesale Pricing Catalog**.

Technical Notes: Face Frame Options - Beaded Applied Molding

Sizes / Dimensions

1	**Minimum Width of Parts**	Minimum width dimensions for Assembled and Ready to Assemble Face Frames using the following Beaded Applied Molding Options are noted below:
		FS100 + #825 or #834 = 15/16" [23.8mm] (Add an additional 5/16" [7.9mm] for center stile or center rail minimum.)
		FS100 + #846 or #851 = ¾" [19.1mm] (Add an additional ¼" [6.4mm] for center stile or center rail minimum.)
		FS100 + #1334 or #1352 = 1 1/16" [27.0mm] (Add an additional 7/16" [11.1mm] for center stile or center rail minimum.)

Inset Doors and Drawer Fronts

- When choosing to use inset doors and drawer fronts on your project, it is wise to recommend to the end user/homeowner that they maintain a controlled environment throughout the year with a consistent humidity level between 30% to 40% at all times. Any fluctuation in humidity levels will increase the likelihood that solid wood doors and drawer fronts will expand and/or contract. When these doors expand due to an increase in humidity, they may begin to rub and bind against the cabinet frame. The smaller the gap, the greater the risk of this occurring.
- When producing your requested gap, WalzCraft always measures the product while in its ***unfinished*** stage. Please take into account that the thickness of the finish will reduce the gap ever so slightly. With finish being applied to the edge of the door, as well as the inside edge of the face frame, even the smallest amount of swelling could cause the door to rub.
- When WalzCraft pre-finishes your Inset / Pre-fit doors with a SolidTone®, the minimum allowable gap will be **2.0mm** or **3/32"** (.09375").

Assembled or Ready To Assemble (RTA) Face Frames with Inset Doors and / or Drawer Fronts (Precision Sized to Fit Openings)

Gap Options available in MM

- 1.5mm
- 2.0mm
- 2.5mm
- 3.0mm

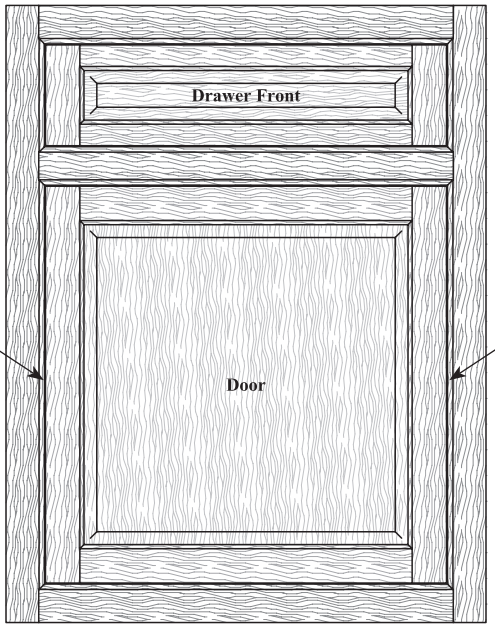

Gap Options available in Inches

- 1/16"
- 3/32"
- 1/8"
- 5/32"

Shown with Style: 10 Drawer Front and Style: 10 Door*

Additional Drawer Bank Configurations (For Single Opening)

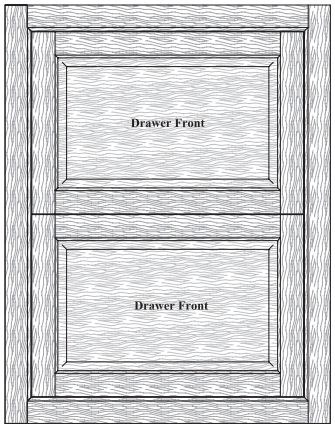

Shown with Style: 10 Drawer Fronts*

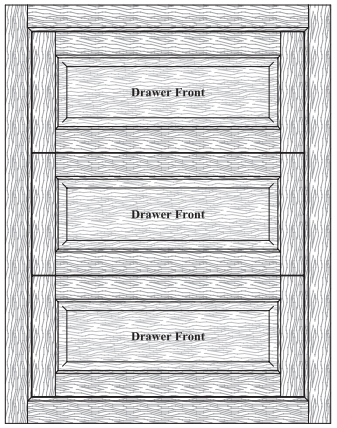

Shown with Style: 10 Drawer Fronts*

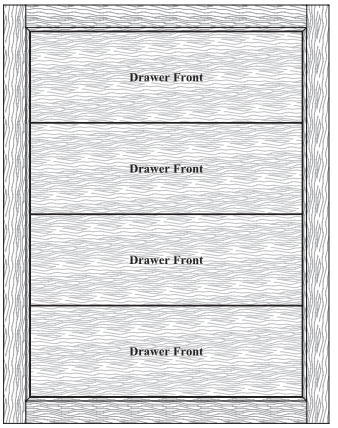

Shown with Style: 34SQA Drawer Fronts*

▶ **For PRICING** ▶ *See Section **J.6*** in our current Wholesale Pricing Catalog.

® WalzCraft® .com © (Phone) 1-800-237-1326 6:00AM - 4:30PM CST (24 Hour Fax) 1-608-781-3667

Outside Edge Profiles for Inset Doors and Drawer Fronts

- **Using an Outside Edge profile with a slight back bevel, such as the D57, D130, D162 or D163 on Pre-fit Doors and Drawer Fronts will allow for adequate Face Frame clearance when opening.**

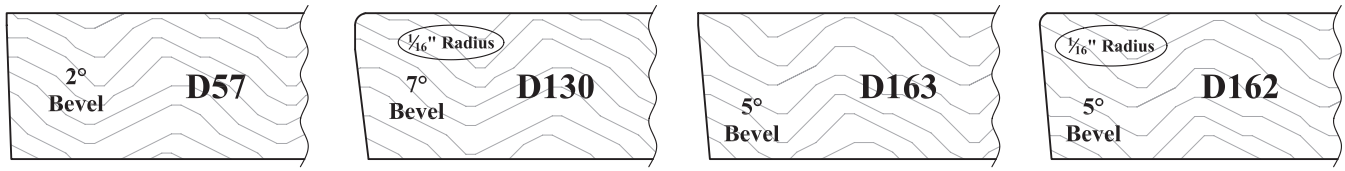

Ordering & Pricing Notes: Face Frame Options - Inset / Prefit Doors

Ordering Guidelines

1	**Order Forms**	Please use ***Assembled & Ready to Assemble (RTA) Face Frame Order Forms (E•Z Forms #15 & 15.1)***.
		Fax your face frame configuration drawings along with your order forms to our Customer Support Team or email drawings to: **customersupport@WalzCraft.com**.
2	**Ordering Information**	Face Frames with precision sized components need to be clearly marked with the frame part sizes, opening width and height dimensions, as well as the overall width and height dimensions.
		Indicate on your drawings which openings are to receive a pre-fit door or drawer front, and the number of doors and drawer fronts per opening. There is no need to provide door and/or drawer front sizes, as these will be determined from the finished opening sizes (see ***Face Frame Options*** note below).
		Specify the gap in millimeters or inches, depending on how you order. • Note each gap: ◦ between the frame and your doors ◦ between the frame and your drawer fronts ◦ between two doors that will cover one opening ◦ between all drawer fronts that will cover one opening • **If ordering in millimeters** gap options are: **1.5mm, 2.0mm, 2.5mm, 3.0mm**. • **If ordering in inches** gap options are: **1/16"** (.0625"), **3/32"** (.09375"), **1/8"** (.125"), **5/32"** (.15625"). • When WalzCraft pre-finishes your Inset / Pre-fit doors with a SolidTone®, the minimum allowable gap will be **2.0mm** or **3/32"** (.09375").

Pricing

1	**Pricing**	Please see ***Section J.6*** of our current **Wholesale Pricing Catalog**.

Technical Notes: Face Frame Options - Inset / Prefit Doors

Face Frame Options (Chapter J)

1	**Precision Sized Doors and / or Drawer Fronts**	Steps to constructing face frames and doors / drawer fronts: • Face frames are built to your specifications. • Face frame openings are measured with calipers. • Customer specified gap is subtracted from face frame opening size and this dimension defines the door/drawer front sizes. ◦ Doors and / or drawer fronts are trimmed to match the sizes calculated above.
2	**Door or Drawer Front Configurations**	A single face frame opening may consist of any one of the following configurations: • 1 Drawer Front • 1 Door • 2 Doors Side by Side • 2 Doors Stacked • 1 Drawer Bank (2, 3, or 4 Drawers)
		Any other configuration of doors and drawer fronts within a single face frame opening may incur additional charges.

Profile Options (Chapter E)

1	**Outside Edge Profiles**	In a Pre-fit situation, WalzCraft recommends that you use the **D57**, **D130**, **D162** or **D163** Outside Edge Profiles, to allow the doors to swing open without hitting the face frame.

► **For PRICING** ► *See Section **J.6*** in our current Wholesale Pricing Catalog.

Blind Corner Extension for Face Frames - BCE100

Blind Corner Extensions (BCE100) are ¾" [19.1mm] or 1" [25.4mm] MDF Panels applied to existing Solid Wood Face frames using the Domino Joinery Method.
Available with Assembled and Ready to Assemble (RTA) Face Frames.

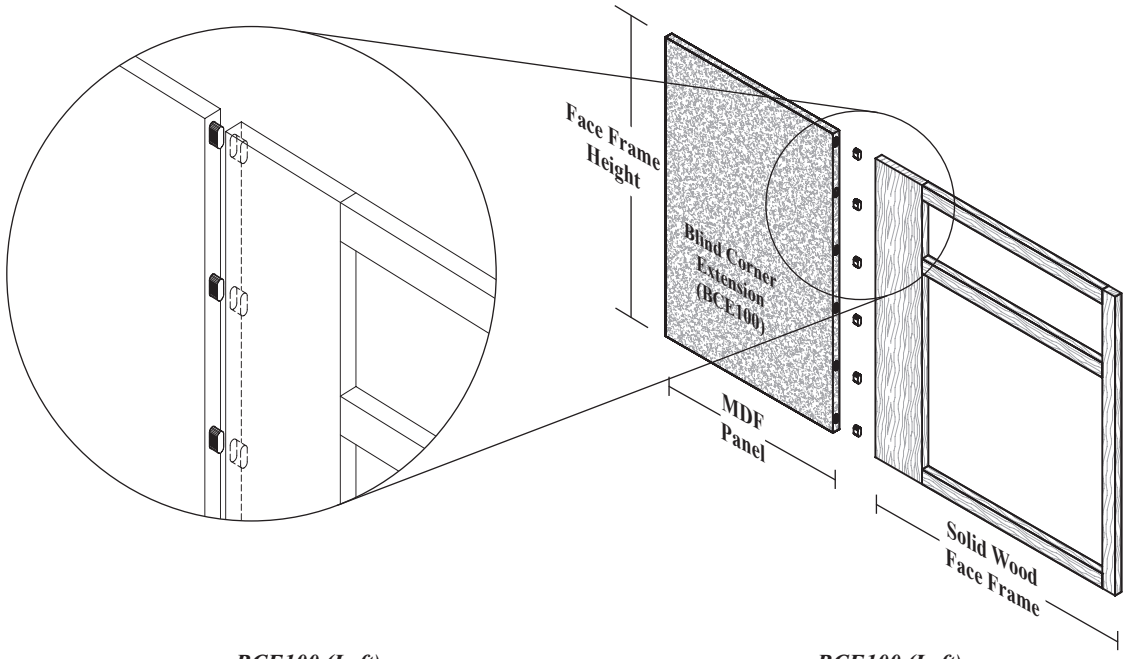

BCE100 (Left)
Domino Joinery - Detail View

BCE100 (Left)
Shown with face frame configuration FF101

Blind Corner Extension - Example Plan View

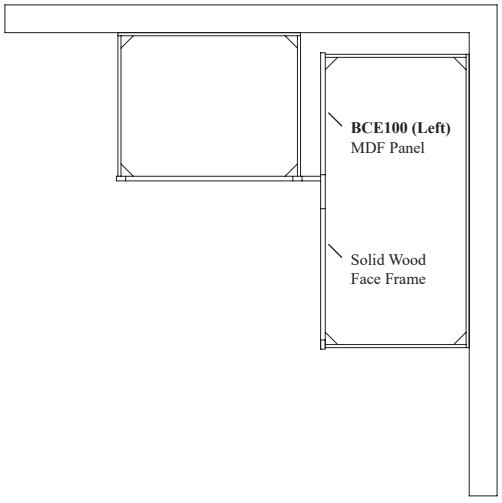

BCE100 (Left) shown in a typical corner application.
Solid Wood Face Frame shown with wide Left Stile.

Blind Corner Extension - Model View

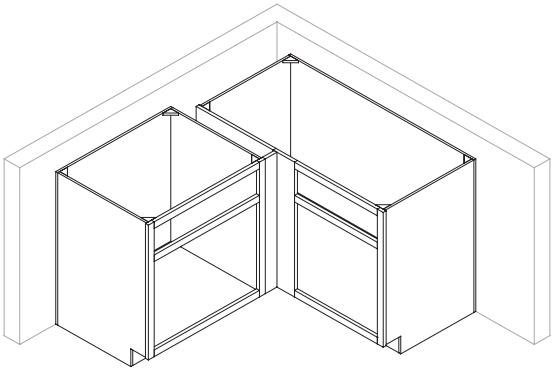

BCE100 (Left) shown in a typical corner application.
Both cabinets shown with FF101.

▶ **For PRICING** ▶ *See Section **J.7*** in our Wholesale Pricing Catalog.

Example: FF101 Face Frame Configuration with Blind Corner Extension (BCE100)

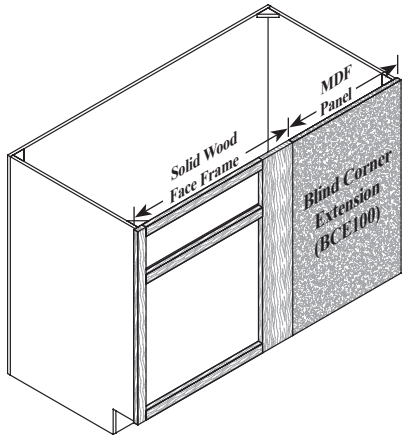

Assembled Face Frame FF101
- **Blind Corner Extension (Right)**
- **Shown with wide Right Stile**

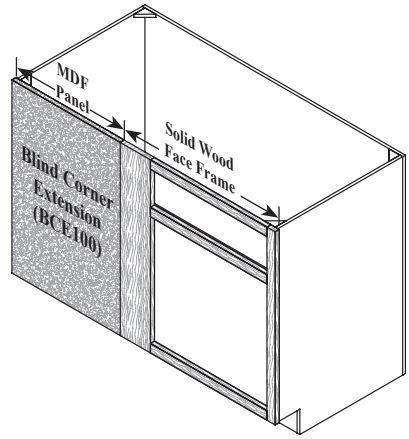

Assembled Face Frame FF101
- **Blind Corner Extension (Left)**
- **Shown with wide Left Stile**

J

Ordering & Pricing Notes: Face Frame Options - Blind Corner Extension

	Ordering Guidelines	
1	**Order Forms**	Please use ***Assembled & Ready to Assemble (RTA) Face Frame Order Forms (E•Z Forms #15 & 15.1)***.
		Fax your face frame configuration drawings along with your order forms to our Customer Support Team or email drawings to: **customersupport@WalzCraft.com**.
2	**Ordering Information**	**Direction of Extension (Left and/or Right)**: Please denote the side of the face frame to which the extension will be applied.
		Extension Width: Please denote dimension from the edge of the Solid Wood Face Frame to the outer edge of the MDF Panel, as shown in the illustration above.
	Pricing	
1	**Pricing**	Please see ***Section J.7*** of the **Wholesale Pricing Catalog**.

Technical Notes: Face Frame Options - Blind Corner Extension

	Finish Options - Assembled and RTA (Chapter R)	
1	**Finish Types**	**Blind Corner Extensions (BCE100)** are available unfinished or finished with a Natural / Clear Coat, "Primed Only for Paint" or SolidTone® finish.
		Blind Corner Extensions (BCE100) are ***not available*** with Stains or SolidTone® Wood Grain finish.
	General Information	
1	**Ready to Assemble**	**Blind Corner Extensions (BCE100)** can be ordered with the MDF Panel attached to the face frame or unattached. Indicate either ***"Ship Extension Attached"*** (Assembled Face Frames only) or ***"Ship Extension Unattached"*** (Assembled & Ready to Assemble Face Frames) in the *Special Instructions* on your order form.
	Material Options	
1	**Material**	Only available with raw MDF.
2	**MDF - MR, NAF, Raw**	Not available with MDF - MR (Moisture Resistant), NAF, Raw.
	Profile Options (Chapter E)	
1	**Outside Edge Profiles**	Not Available with an Outside Edge Profile.
	Sizes / Dimensions	
1	**Maximum Sizes**	The maximum size of a raw MDF product is 48"W x 96"H [1219.2mm x 2438.4mm].
2	**Minimum Sizes**	The minimum **Extension Width** is 1½" [38.1mm].
3	**Thicknesses**	Extensions available in ¾" [19.1mm] and 1" [25.4mm] thicknesses.

▶ **For PRICING** ▶ *See Section **J.7*** in our Wholesale Pricing Catalog.

Cabinet Fillers - Square

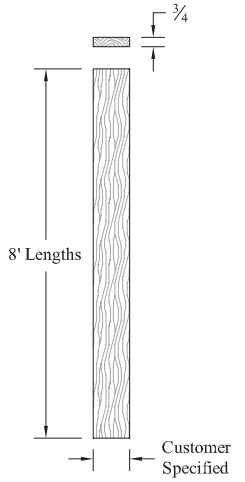

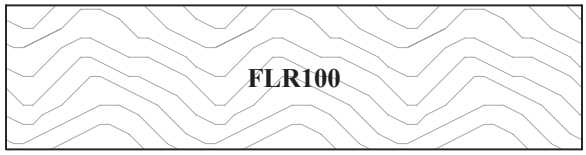

Matches Face Frame Stock - FS100

J

Ordering & Pricing Notes: Cabinet Fillers - Square

Ordering Guidelines

1	**Order Forms**	Please use ***Face Frame Stock Order Form (E•Z Form #9)***.
2	**Ordering Information**	Indicate quantity, part number and size (Thickness x Width x Length).

Pricing

1	**Pricing**	Please see ***Section J.8*** of our current **Wholesale Pricing Catalog**.

Technical Notes: Cabinet Fillers - Square

Design Options (Chapter G)

1	**Additional Profiles**	Not available with additional profiles or miscellaneous joinery. For solid wood stock with profiles and/or miscellaneous joinery options, please see ***Section G.16 - Profiled Stock***.

Finish Options (Chapter R)

1	**Finishing**	Finishing is available. Cabinet Fillers will be stained and sealed on two sides and all edges, and top coated on the face and all edges.
2	**3D Laminate**	3D Laminate (RTF) Cabinet Fillers (**FLR100** only) are made of a solid wood core (Maple - Paint Grade) and are not subject to the same thickness limitations as MDF.
		As a standard, WalzCraft will apply the 3D Laminate material to the face and two long edges only.
		3D Laminate cabinet fillers are only available with a D33 outside edge profile.

Sizes / Dimensions

1	**Thickness**	Available in ½" [12.7mm], ⅝" [15.9mm], ¾" [19.1mm], ⅞" [22.2mm], 1" 25.4mm], 1⅛" [28.6mm] or 1¼" [31.8mm] thicknesses.
2	**Width**	Cabinet Fillers are available in a minimum width of a ½" [12.7mm] and a maximum width of 9" [228.6mm].
		9" [228.6mm] Maximum Width: WalzCraft makes every attempt to produce these parts from one solid piece of wood. Due to lumber availability and/or wood species, widths under 9" [228.6mm] may need to be made from two or more edge glued pieces. • For widths over 9" [228.6mm], please refer to our **GUPFS** product found in ***Section M.16***.
3	**Length**	Available in 8' [2438.4mm] Lengths, Cut to Length and Random Lengths. • Cabinet fillers with 3D Laminate are only available in 8' [2438.4mm] lengths (not available cut to length or in random lengths).
		The minimum length for Cut-to-Length pieces is 3" [76.2mm].
		Random length sizes vary between 36" [914.4mm] and 96" [2438.4mm] long. When measured, we round down to the next nearest ½ foot.
		Cabinet fillers have a standard length of up to 96" [2438.4mm]. Lengths greater than 8' [2438.4mm] are subject to availability. *Please note that the choice of wood species and grade can impact the availability of lengths greater than 8' [2438.4mm].* • Lengths longer than 8' [2438.4mm] are not available for cabinet fillers with 3D Laminate.

▶ **For PRICING** ▶ *See Section **J.8*** in our current Wholesale Pricing Catalog.

Cabinet Fillers - Beaded

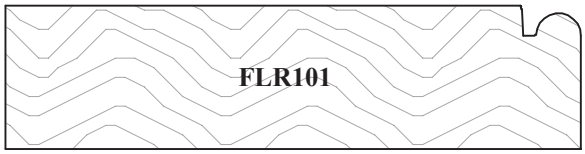

Matches Face Frame Stock - FS101

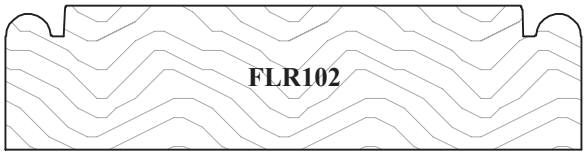

Matches Face Frame Stock - FS102

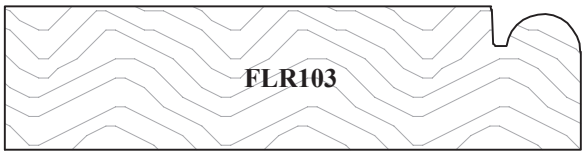

Matches Face Frame Stock - FS103

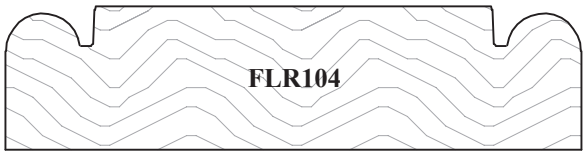

Matches Face Frame Stock - FS104

J

Ordering & Pricing Notes: Cabinet Fillers - Beaded

	Ordering Guidelines	
1	**Order Forms**	Please use ***Face Frame Stock Order Form (E•Z Form #9)***.
2	**Ordering Information**	Indicate quantity, part number and size (Thickness x Width x Length).
	Pricing	
1	**Pricing**	Please see ***Section J.8*** of our current **Wholesale Pricing Catalog**.

Technical Notes: Cabinet Fillers - Beaded

	Design Options (Chapter G)	
1	**Additional Profiles**	Not available with additional profiles or miscellaneous joinery. For solid wood stock with profiles and/or miscellaneous joinery options, please see ***Section G.16 - Profiled Stock***.
	Face Frame Options (Chapter J)	
1	**Bead Location**	Bead is applied to one or two long edges only. Bead is not available on the ends.
	Finish Options (Chapter R)	
1	**Finishing**	Finishing is available. Cabinet Fillers will be stained and sealed on two sides and all edges, and top coated on the face and all edges.
2	**3D Laminate**	The above cabinet fillers are not available with 3D Laminate (RTF).
	Sizes / Dimensions	
1	**Thickness**	Available in ¾" [19.1mm], ⅞" [22.2mm] , 1" [25.4mm], 1⅛" [28.6mm] or 1¼" [31.8mm] thicknesses.
2	**Width**	Cabinet Fillers are available in a minimum width of a ½" [12.7mm] and a maximum width of 9" [228.6mm]. **9" [228.6mm] Maximum Width:** WalzCraft makes every attempt to produce these parts from one solid piece of wood. Due to lumber availability and/or wood species, widths under 9" [228.6mm] may need to be made from two or more edge glued pieces. • For widths over 9" [228.6mm], please refer to our **GUPFS** product found in ***Section M.16***.
3	**Length**	Available in 8' [2438.4mm] Lengths, Cut-to-Length and Random Lengths. The minimum length for Cut-to-Length pieces is 3" [76.2mm]. Random length sizes vary between 36" [914.4mm] and 96" [2438.4mm] long. When measured, we round down to the next nearest ½ foot. Cabinet fillers have a standard length of up to 96" [2438.4mm]. Lengths greater than 8' [2438.4mm] are subject to availability. *Please note that the choice of wood species and grade can impact the availability of lengths greater than 8' [2438.4mm].* • Lengths longer than 8' [2438.4mm] are not available for cabinet fillers with 3D Laminate.

▶ **For PRICING** ▶ *See Section **J.8*** in our current Wholesale Pricing Catalog.

J

® WalzCraft® .com © (Phone) 1-800-237-1326 6:00AM - 4:30PM CST (24 Hour Fax) 1-608-781-3667