

Slab Drawer / Traditional Mortise & Tenon Door
(S100) *Unity*



Slab Drawer / Mitered Mortise & Tenon Door
(S382) *Piedmont*



Traditional Mortise & Tenon Mullion Door
(S733) *LP114 - 12 Lites*



Traditional Mortise & Tenon Louvered Door
(S363) *Lakeshore*




Chapter B Table of Contents

Section #	Section Name/Contents	Page #
B.1	Traditional Mortise & Tenon - Raised Panel	B.1.2
B.2	Quarter, Half Circle & Gothic - Raised Panel (Traditional M/T)	B.2.1
B.3	Traditional Mortise & Tenon - 1/4" Flat Panel	B.3.1
B.4	Quarter, Half Circle & Gothic - 1/4" Flat Panel (Traditional M/T)	B.4.1
B.5	Mitered (<i>Mitre</i>) Mortise & Tenon - Raised Panel	B.5.1
B.6	Mitered (<i>Mitre</i>) Mortise & Tenon - 1/4" Flat Panel	B.6.1
B.7	French Miter & Adventure Series	B.7.1
	◦ French Miter Mortise & Tenon - Raised & 1/4" Flat Panel	B.7.1
	◦ Adventure Series - Raised & 1/4" Flat Panel	B.7.5
B.8	No-Panel Cut (NPC) Frame Only Doors	B.8.1
	◦ No-Panel Cut (NPC) Frame Only Doors - Applied Moldings	B.8.1
B.9	Contemporary	B.9.1
	◦ Contemporary Slab & Batten Doors	B.9.1
	◦ Contemporary Mortise & Tenon Doors	B.9.4
B.10	Veneered & Edgebanded - Standard Veneer	B.10.1
	◦ Applied Molding Outside Edge Profiles	B.10.13
B.11	Veneered & Edgebanded - Reconstituted Veneer	B.11.1
B.12	Frame Only & Mullion Lite Patterns	B.12.1
	◦ Frame & Mullion Lite Pattern Options	B.12.1
	◦ Formula for Glass Size Calculation	B.12.7
	◦ Half Lap Mullion Construction	B.12.7
	◦ Rubber Glass Retainer	B.12.7
	◦ Lite Types - Standard, True/Divider Molding, True/Retainer Groove	B.12.8
	◦ Wood Retainer Molding	B.12.9
B.13	Combination Frame & Panel	B.13.1
B.14	Louvered/Wood Shutters - Open (<i>Allows Air Flow and Light Penetration</i>)	B.14.1
	◦ Operable/Adjustable Louvers	B.14.1
	◦ Non-Operable (Fixed) Louvers	B.14.2
B.15	Louvered/Wood Shutters - Closed (<i>No Air Flow or Light Penetration</i>)	B.15.1
	◦ Slat Applied Molding Options	B.15.2
	◦ Beaded/Reeded Applied Molding Options	B.15.2
B.16	Drawer Fronts - Slab and RP (Raised Panel)	B.16.1
B.17	Drawer Fronts - Molded	B.17.1
B.18	Onlay Frames	B.18.1
B.19	Pyramid Panel Doors & Drawer Fronts	B.19.1
B.20	Nexus Doors & Drawer Fronts	B.20.1

Cabinet Door & Drawer Front Options


Traditional Mortise & Tenon - Raised Panel

B




Style: 10

PC: 101
Frame: PC101 x 0.6
Min. Size: 8x8
[203.2mm x 203.2mm]




Style: 20

PC: 102
Frame: PC102 x 0.6
Min. Size: 8x9 3/4
[263.5mm x 247.7mm]




Style: 2000

PC: 102
Frame: PC102 x 0.6
Min. Size: 8x9 3/4
[203.2mm x 247.7mm]




Style: 2200

PC: 102
Frame: PC102 x 0.6
Min. Size: 8x9 3/4
[294.5mm x 247.7mm]




Style: 1090

PC: 107
Frame: PC107 x 0.6
Min. Size: 11 5/8 x 9 13/16
[295.3mm x 249.2mm]




Style: 1010

PC: 103
Frame: PC103 x 0.6
Min. Size: 13 3/4 x 8
[349.3mm x 203.2mm]




Style: 2020

PC: 106
Frame: PC106 x 0.6
Min. Size: 8x11 1/2
[263.5mm x 292.1mm]




Style: 4000

PC: 106
Frame: PC106 x 0.6
Min. Size: 8x11 1/2
[203.2mm x 292.1mm]




Style: 2222

PC: 106
Frame: PC106 x 0.6
Min. Size: 8x11 1/2
[203.2mm x 292.1mm]




Style: 1080

PC: 111
Frame: PC111 x 0.6
Min. Size: 11 5/8 x 11 5/8
[295.3mm x 295.3mm]




Style: 7000

PC: 104
Frame: PC104 x 0.6
Min. Size: 12x11 1/4
[304.8mm x 285.8mm]




Style: 2500

PC: 102
Frame: PC102 x 0.6
Min. Size: 8x9 3/4
[203.2mm x 247.7mm]




Style: 2525

PC: 106
Frame: PC106 x 0.6
Min. Size: 8x11 1/2
[203.2mm x 292.1mm]




Style: 2070L

PC: 102
Frame: PC102 x 0.6
Min. Size: 8x9 3/4
[203.2mm x 247.7mm]




Style: 2070R

PC: 102
Frame: PC102 x 0.6
Min. Size: 8x9 3/4
[203.2mm x 247.7mm]




Style: 7070

PC: 109
Frame: PC109 x 0.6
Min. Size: 12x14 1/2
[304.8mm x 368.3mm]




Style: 2001L

PC: 102
Frame: PC102 x 0.6
Min. Size: 8x9 3/4
[203.2mm x 247.7mm]




Style: 2001R

PC: 102
Frame: PC102 x 0.6
Min. Size: 8x9 3/4
[203.2mm x 247.7mm]



Style: 2201L

PC: 102
Frame: PC102 x 0.6
Min. Size: 8x9 3/4
[203.2mm x 247.7mm]



Style: 2201R

PC: 102
Frame: PC102 x 0.6
Min. Size: 8x9 3/4
[203.2mm x 247.7mm]

► For PRICING ► See Section B.1 in our current Wholesale Pricing Catalog.

B.1.2

V18.2



WalzCraft.com



(Phone) 1-800-237-1326


6:00AM - 5:30PM CST

(24 Hour Fax) 1-608-781-3667

Traditional Mortise & Tenon - Raised Panel


Cabinet Door & Drawer Front Options

B




Style: 2800L

PC: 102
Frame: PC102 x 0.6
Min. Size: 12x9¼
[304.8mm x 247.7mm]




Style: 2800R

PC: 102
Frame: PC102 x 0.6
Min. Size: 12x9¼
[304.8mm x 247.7mm]




Style: 2828L

PC: 106
Frame: PC106 x 0.6
Min. Size: 12x11½
[304.8mm x 292.1mm]




Style: 2828R

PC: 106
Frame: PC106 x 0.6
Min. Size: 12x11½
[304.8mm x 292.1mm]




Style: 25

PC: 102
Frame: PC102 x 0.6
Min. Size: 8x9¼
[203.2mm x 247.7mm]




Style: 1060

PC: 107
Frame: PC107 x 0.6
Min. Size: 9x10¼
[228.6mm x 273.1mm]




Style: 1070

PC: 111
Frame: PC111 x 0.6
Min. Size: 9x12½
[228.6mm x 317.5mm]




Style: 2005

PC: 102
Frame: PC102 x 0.6
Min. Size: 8x9¼
[203.2mm x 247.7mm]




Style: 2055

PC: 106
Frame: PC106 x 0.6
Min. Size: 8x11½
[203.2mm x 292.1mm]




Style: 2727

PC: 106
Frame: PC106 x 0.6
Min. Size: 8x11½
[203.2mm x 292.1mm]




Style: 2011L

PC: 123
Frame: PC123 x 0.6
Min. Size: 8x9¼
[203.2mm x 247.7mm]




Style: 2011R

PC: 123
Frame: PC123 x 0.6
Min. Size: 8x9¼
[203.2mm x 247.7mm]




Style: 2077L

PC: 123
Frame: PC123 x 0.6
Min. Size: 8x9¼
[203.2mm x 247.7mm]




Style: 2077R

PC: 123
Frame: PC123 x 0.6
Min. Size: 8x9¼
[203.2mm x 247.7mm]




Style: 1055

PC: 119
Frame: PC119 x 0.6
Min. Size: 9x9¼
[228.6mm x 247.7mm]




Style: 1065

PC: 130
Frame: PC130 x 0.6
Min. Size: 9x9¼
[228.6mm x 247.7mm]




Style: 1075

PC: 120
Frame: PC120 x 0.6
Min. Size: 9x11½
[228.6mm x 292.1mm]




Style: 1800

PC: 118
Frame: PC118 x 0.6
Min. Size: 8x8
[203.2mm x 203.2mm]



Style: 1801

PC: 101
Frame: PC101 x 0.6
Min. Size: 8x8
[203.2mm x 203.2mm]



Style: 2433


PC: 118
Frame: PC118 x 0.6
Min. Size: 8x8
[203.2mm x 203.2mm]

► For PRICING ► See Section B.1 in our current Wholesale Pricing Catalog.

Cabinet Door & Drawer Front Options


Traditional Mortise & Tenon - Raised Panel

B




Style: 8010

PC: 131
Frame: PC131 x 0.6
Min. Size: 13 $\frac{3}{4}$ x15 $\frac{1}{2}$
[349.3mm x 393.7mm]




Style: 8160

PC: 115
Frame: PC115 x 0.6
Min. Size: 13 $\frac{3}{4}$ x13 $\frac{3}{4}$
[349.3mm x 349.3mm]




Style: 8170

PC: 115
Frame: PC115 x 0.6
Min. Size: 13 $\frac{3}{4}$ x15 $\frac{1}{2}$
[349.3mm x 393.7mm]




Style: 8060L

PC: 132
Frame: PC132 x 0.6
Min. Size: 13 $\frac{3}{4}$ x15 $\frac{1}{2}$
[349.3mm x 393.7mm]




Style: 8060R

PC: 132
Frame: PC132 x 0.6
Min. Size: 13 $\frac{3}{4}$ x15 $\frac{1}{2}$
[349.3mm x 393.7mm]




Style: 2187

PC: 123
Frame: PC123 x 0.6
Min. Size: 8x9 $\frac{1}{4}$
[203.2mm x 247.7mm]




Style: 2100L

PC: 121
Frame: PC121 x 0.6
Fixed Min: 12x11 $\frac{1}{16}$
[304.8mm x 284.2mm]




Style: 2100R

PC: 121
Frame: PC121 x 0.6
Fixed Min: 12x11 $\frac{1}{16}$
[304.8mm x 284.2mm]




Style: 2121L

PC: 124
Frame: PC124 x 0.6
Fixed Min: 12x12 $\frac{5}{8}$
[304.8mm x 320.7mm]




Style: 2121R

PC: 124
Frame: PC124 x 0.6
Fixed Min: 12x12 $\frac{5}{8}$
[304.8mm x 320.7mm]



Style: 2291L

PC: 131
Frame: PC131 x 0.6
Min. Size: 13 $\frac{3}{4}$ x13 $\frac{3}{4}$
[349.3mm x 349.3mm]




Style: 2291R

PC: 131
Frame: PC131 x 0.6
Min. Size: 13 $\frac{3}{4}$ x13 $\frac{3}{4}$
[349.3mm x 349.3mm]




Style: 2524

PC: 105
Frame: PC105 x 0.6
Min. Size: 8x15 $\frac{1}{2}$
[203.2mm x 393.7mm]



Style: 2755

PC: 112
Frame: PC112 x 0.6
Min. Size: 8x17 $\frac{1}{8}$
[203.2mm x 435mm]

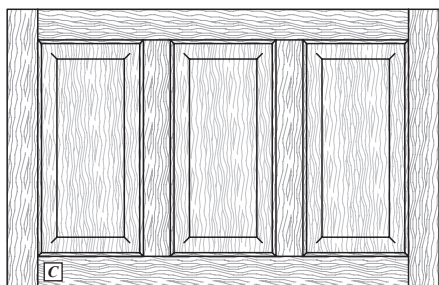

Style: 8020

PC: 108
Frame: PC108 x 0.6
Min. Size: 19 $\frac{1}{2}$ x8
[495.3mm x 203.2mm]

► For PRICING ► See Section **B.1** in our current Wholesale Pricing Catalog.

B.1.4

V18.2



WalzCraft.com



(Phone) 1-800-237-1326


6:00AM - 5:30PM CST

(24 Hour Fax) 1-608-781-3667

Traditional Mortise & Tenon - Raised Panel

Cabinet Door & Drawer Front Options

B



Style: 8000

PC: 103
Frame: PC103 x 0.6
Min. Size: 8x13 $\frac{3}{4}$
[203.2mm x 349.3mm]



Style: 1000

PC: 103
Frame: PC103 x 0.6
Min. Size: 8x15 $\frac{1}{2}$
[203.2mm x 393.7mm]




Style: 1941

PC: 103
Frame: PC103 x 0.6
Min. Size: 8x16 $\frac{5}{8}$
[203.2mm x 415.9mm]



Style: 8045

PC: 103
Frame: PC103 x 0.6
Min. Size: 8x16 $\frac{5}{8}$
[203.2mm x 415.9mm]

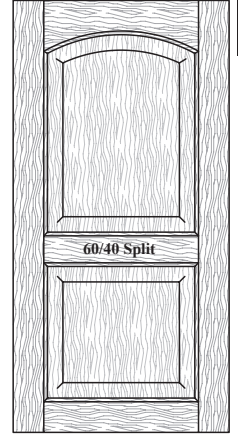

Style: 2050

PC: 105
Frame: PC105 x 0.6
Min. Size: 8x15 $\frac{1}{2}$
[203.2mm x 393.7mm]



Style: 2010

PC: 105
Frame: PC105 x 0.6
Min. Size: 8x15 $\frac{1}{2}$
[203.2mm x 393.7mm]



Style: 2210

PC: 105
Frame: PC105 x 0.6
Min. Size: 8x15 $\frac{1}{2}$
[203.2mm x 393.7mm]




Style: 2105

PC: 105
Frame: PC105 x 0.6
Min. Size: 8x15 $\frac{1}{2}$
[203.2mm x 393.7mm]



Style: 2505

PC: 105
Frame: PC105 x 0.6
Min. Size: 8x15 $\frac{1}{2}$
[203.2mm x 393.7mm]

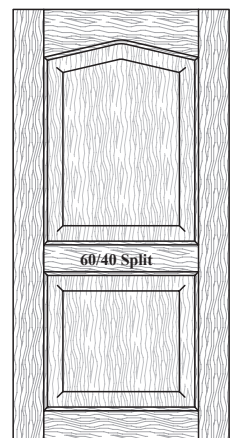

Style: 2550

PC: 105
Frame: PC105 x 0.6
Min. Size: 8x15 $\frac{1}{2}$
[203.2mm x 393.7mm]



Style: 1020

PC: 114
Frame: PC114 x 0.6
Min. Size: 11 $\frac{5}{8}$ x15 $\frac{19}{32}$
[295.3mm x 396.1mm]



Style: 7010

PC: 113
Frame: PC113 x 0.6
Min. Size: 12x17
[304.8mm x 431.8mm]




Style: 2323

PC: 112
Frame: PC112 x 0.6
Min. Size: 8x17 $\frac{1}{4}$
[203.2mm x 438.2mm]



Style: 2025

PC: 112
Frame: PC112 x 0.62
Min. Size: 8x17 $\frac{1}{4}$
[203.2mm x 438.2mm]

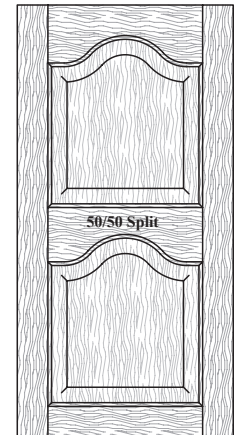

Style: 2035

PC: 112
Frame: PC112 x 0.6
Min. Size: 8x17 $\frac{1}{4}$
[203.2mm x 438.2mm]

► For PRICING ► See Section B.1 in our current Wholesale Pricing Catalog.

Cabinet Door & Drawer Front Options


Traditional Mortise & Tenon - Raised Panel

B




Style: 8050

PC: 132
Frame: PC132 x 0.6
Min. Size: 13 $\frac{3}{4}$ x23
[349.3mm x 584.2mm]




Style: 8030

PC: 108
Frame: PC108 x 0.6
Min. Size: 8x19 $\frac{1}{2}$
[203.2mm x 495.3mm]

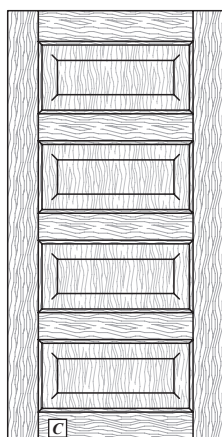

Style: 2271

PC: 115
Frame: PC115 x 0.6
Min. Size: 8x25 $\frac{1}{4}$
[203.2mm x 641.4mm]




Style: 2272

PC: 117
Frame: PC117 x 0.6
Min. Size: 8x31
[203.2mm x 787.4mm]




Style: 2427

PC: 131
Frame: PC131 x 0.6
Min. Size: 13 $\frac{3}{4}$ x16 $\frac{3}{8}$
[349.3mm x 415.9mm]

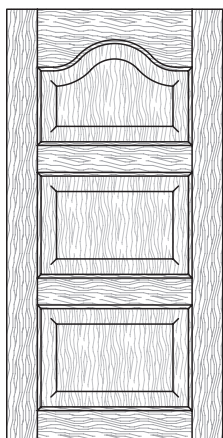


Style: 2185

PC: 110
Frame: PC110 x 0.6
Min. Size: 8x21 $\frac{1}{4}$
[203.2mm x 539.8mm]

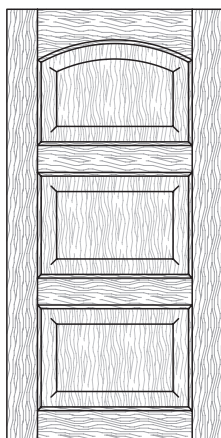

Style: 2186

PC: 110
Frame: PC110 x 0.6
Min. Size: 8x21 $\frac{1}{4}$
[203.2mm x 539.8mm]

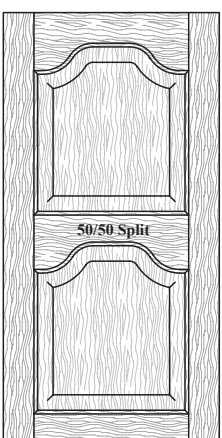

Style: 2036

PC: 112
Frame: PC112 x 0.6
Min. Size: 8x17 $\frac{1}{4}$
[203.2mm x 438.2mm]




Style: 2422L

PC: 105
Frame: PC105 x 0.6
Min. Size: 8x15 $\frac{1}{2}$
[203.2mm x 393.7mm]



Style: 2422R

PC: 105
Frame: PC105 x 0.6
Min. Size: 8x15 $\frac{1}{2}$
[203.2mm x 393.7mm]

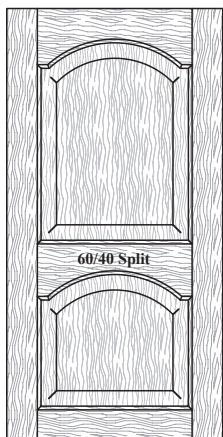


Style: 2288

PC: 112
Frame: PC112 x 0.6
Min. Size: 8x16 $\frac{3}{8}$
[203.2mm x 422.3mm]



Style: 2418

PC: 128
Frame: PC128 x 0.6
Min. Size: 11 $\frac{5}{8}$ x17 $\frac{3}{8}$
[295.3mm x 441.3mm]

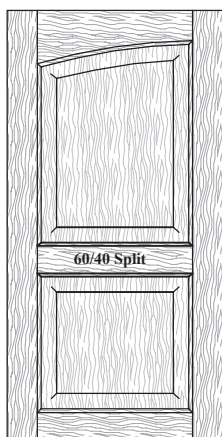

Style: 2420L

PC: 105
Frame: PC105 x 0.6
Min. Size: 8x15 $\frac{1}{2}$
[203.2mm x 393.7mm]



Style: 2420R

PC: 105
Frame: PC105 x 0.6
Min. Size: 8x15 $\frac{1}{2}$
[203.2mm x 393.7mm]



Style: 2425

PC: 112
Frame: PC112 x 0.6
Min. Size: 8x17 $\frac{1}{4}$
[203.2mm x 438.2mm]

► For PRICING ► See Section B.1 in our current Wholesale Pricing Catalog.

B.1.6

V18.2



WalzCraft.com



(Phone) 1-800-237-1326


6:00AM - 5:30PM CST

(24 Hour Fax) 1-608-781-3667

Traditional Mortise & Tenon - Raised Panel


Cabinet Door & Drawer Front Options

B

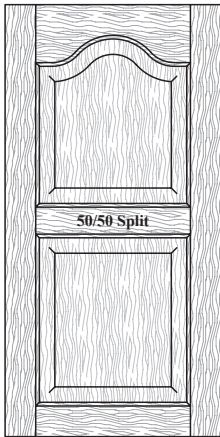

Style: 2818

PC: 105
Frame: PC105 x 0.6
Min. Size: 8x17¼
[203.2mm x 438.2mm]




Style: 2820

PC: 105
Frame: PC105 x 0.6
Min. Size: 8x17¼
[203.2mm x 438.2mm]




Style: 2822

PC: 105
Frame: PC105 x 0.6
Min. Size: 8x15½
[203.2mm x 393.7mm]

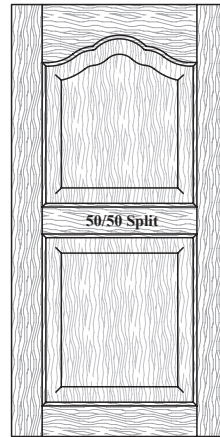


Style: 2824

PC: 105
Frame: PC105 x 0.6
Min. Size: 8x15½
[203.2mm x 393.7mm]

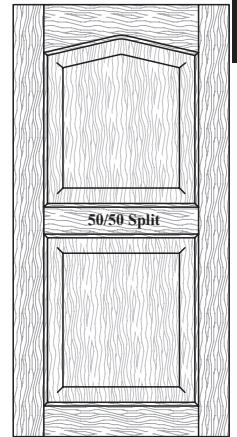


Style: 2826

PC: 105
Frame: PC105 x 0.6
Min. Size: 8x15½
[203.2mm x 393.7mm]

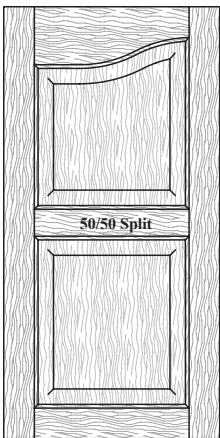

Style: 2836L

PC: 105
Frame: PC105 x 0.6
Min. Size: 8x16⅞
[203.2mm x 423.9mm]

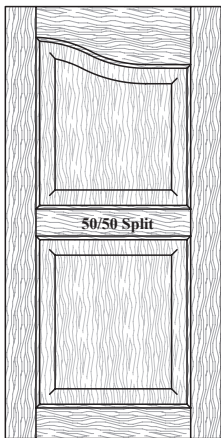

Style: 2836R

PC: 105
Frame: PC105 x 0.6
Min. Size: 8x16⅞
[203.2mm x 423.9mm]



Style: 2846L

PC: 105
Frame: PC105 x 0.6
Min. Size: 8x15½
[203.2mm x 393.7mm]




Style: 2846R

PC: 105
Frame: PC105 x 0.6
Min. Size: 8x15½
[203.2mm x 393.7mm]




Style: 2834

PC: 114
Frame: PC114 x 0.6
Min. Size: 11⅝x17⅜
[295.3mm x 441.3mm]

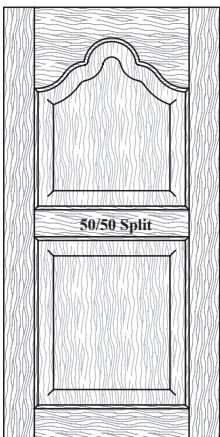


Style: 2830

PC: 113
Frame: PC113 x 0.6
Min. Size: 12x17
[304.8mm x 431.8mm]




Style: 2832L

PC: 105
Frame: PC105 x 0.6
Min. Size: 8x14⅝
[203.2mm x 371.5mm]

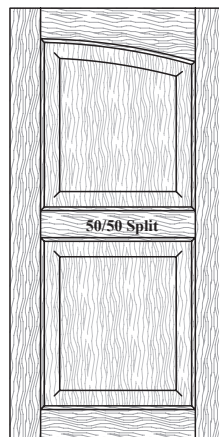

Style: 2832R

PC: 105
Frame: PC105 x 0.6
Min. Size: 8x14⅝
[203.2mm x 371.5mm]

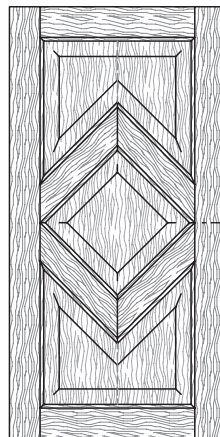

Style: 2928

PC: 127
Frame: PC127 x 0.6
Min. Size: 12x26
[304.8mm x 660.4mm]


⌒ = Center Line of Center Rail

CRP = Center Rail Placement.

Cabinet Door & Drawer Front Options

Traditional Mortise & Tenon - Raised Panel

B

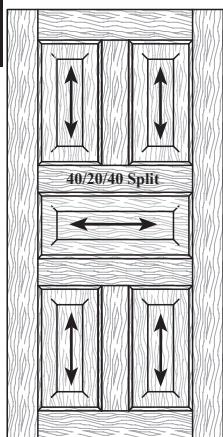

Style: 2465

PC: 136
Frame: PC136 x 0.6
Min. Size: 13 $\frac{3}{4}$ x25
[349.3mm x 635mm]




Style: 2498L

PC: 137
Frame: PC137 x 0.6
Min. Size: 8x15 $\frac{1}{2}$
[203.2mm x 393.7mm]



Style: 2498R

PC: 137
Frame: PC137 x 0.6
Min. Size: 8x15 $\frac{1}{2}$
[203.2mm x 393.7mm]

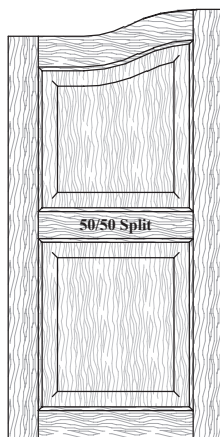


Style: 2501L

PC: 137
Frame: PC137 x 0.6
Min. Size: 8x17 $\frac{1}{4}$
[203.2mm x 438.2mm]




Style: 2501R

PC: 137
Frame: PC137 x 0.6
Min. Size: 8x17 $\frac{1}{4}$
[203.2mm x 438.2mm]

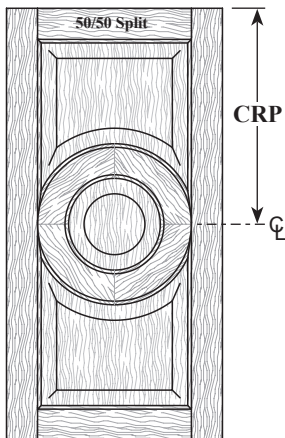


Style: 2156

PC: 127
Frame: PC127 x 0.6
Min. Size: 11 $\frac{3}{4}$ x22
[298.5mm x 558.8mm]

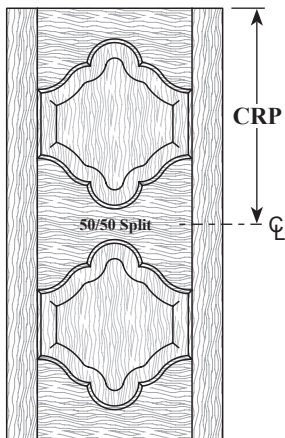


Style: 2456

PC: 135
Frame: PC135 x 0.6
Min. Size: 12x26 $\frac{3}{4}$
[304.8mm x 679.5mm]

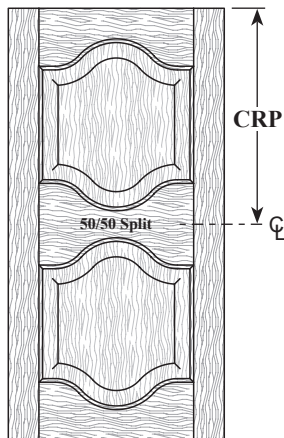


Style: 2424

PC: 116
Frame: PC116 x 0.6
Min. Size: 8x20 $\frac{3}{4}$
[203.2mm x 527.1mm]

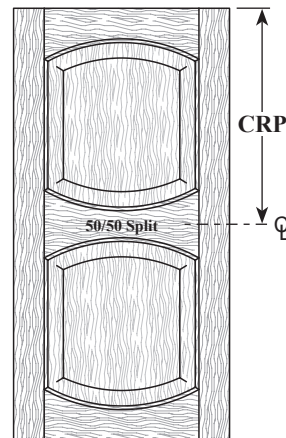


Style: 2171

PC: 116
Frame: PC116 x 0.6
Min. Size: 8x20 $\frac{3}{4}$
[203.2mm x 527.1mm]

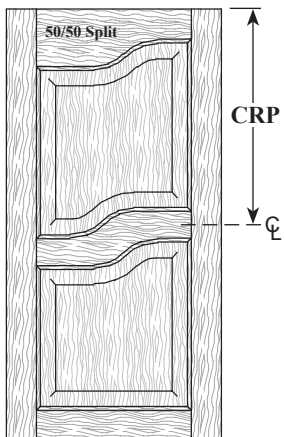


Style: 2563L

PC: 138
Frame: PC138 x 0.6
Min. Size: 12x17
[304.8mm x 431.8mm]

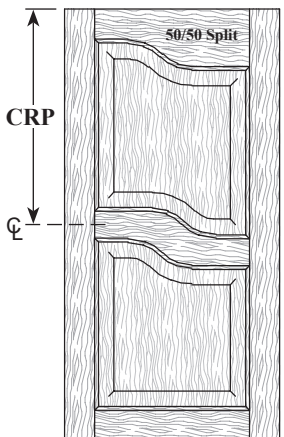


Style: 2563R

PC: 138
Frame: PC138 x 0.6
Min. Size: 12x17
[304.8mm x 431.8mm]

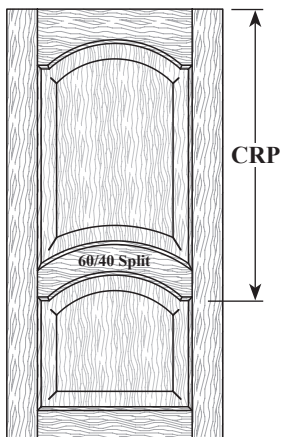

Style: 2287

PC: 138
Frame: PC138 x 0.6
Min. Size: 8x15 $\frac{1}{2}$
[203.2mm x 403.2mm]

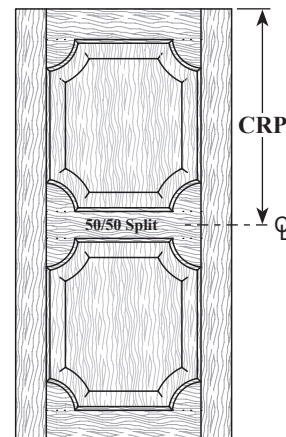


Style: 2416

PC: 129
Frame: PC129 x 0.6
Min. Size: 11 $\frac{5}{8}$ x21
[295.3mm x 533.4mm]


CL = Center Line of Center Rail

CRP = Center Rail Placement.




Style: 2234

PC: 122
Frame: PC122 x 0.6
Min. Size: 8x8
[203.2mm x 203.2mm]
See Notes for Ordering Information




Style: 2235

PC: 126
Frame: PC126 x 0.6
Min. Size: 13 3/4 x 8
[349.3mm x 203.2mm]
See Notes for Ordering Information




Style: 2231L

PC: 122
Frame: PC122 x 0.6
Min. Size: 8x8
[203.2mm x 203.2mm]
See Notes for Ordering Information




Style: 2231R

PC: 122
Frame: PC122 x 0.6
Min. Size: 8x8
[203.2mm x 203.2mm]
See Notes for Ordering Information




Style: 2232L

PC: 122
Frame: PC122 x 0.6
Min. Size: 8x8
[203.2mm x 203.2mm]
See Notes for Ordering Information




Style: 2232R

PC: 122
Frame: PC122 x 0.6
Min. Size: 8x8
[203.2mm x 203.2mm]
See Notes for Ordering Information




Style: 2284L

PC: 122
Frame: PC122 x 0.6
Min. Size: 8x8
[203.2mm x 203.2mm]
See Notes for Ordering Information




Style: 2284R

PC: 122
Frame: PC122 x 0.6
Min. Size: 8x8
[203.2mm x 203.2mm]
See Notes for Ordering Information




Style: 2631L

PC: 139
Frame: PC139 x 0.6
Min. Size: 9 3/4 x 9 3/4
[247.7mm x 247.7mm]
See Notes for Ordering Information




Style: 2631R

PC: 139
Frame: PC139 x 0.6
Min. Size: 9 3/4 x 9 3/4
[247.7mm x 247.7mm]
See Notes for Ordering Information

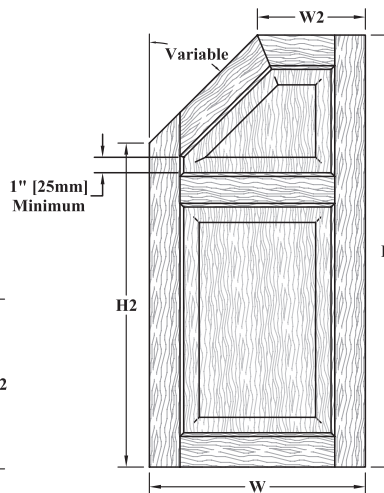

Style: 2289L

PC: 140
Frame: PC140 x 0.6
Min. Size: 9 3/4 x 13 3/4
[247.7mm x 349.3mm]
See Notes for Ordering Information

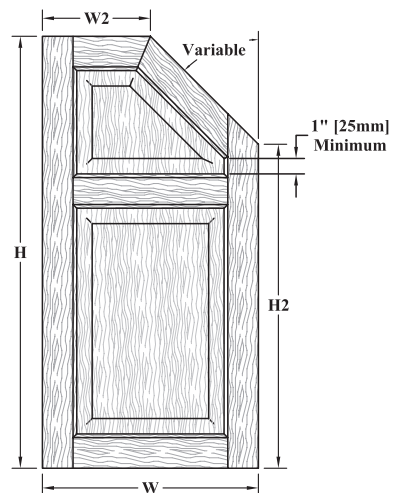

Style: 2289R

PC: 140
Frame: PC140 x 0.6
Min. Size: 9 3/4 x 13 3/4
[247.7mm x 349.3mm]
See Notes for Ordering Information

► For PRICING ► See Section B.1 in our current Wholesale Pricing Catalog.

Cabinet Door & Drawer Front Options

Traditional Mortise & Tenon - Raised Panel

B



Style: 2021L


PC: 125

Frame: PC125 x 0.6

Min. Size: 10x12 $\frac{1}{4}$

[254mm x 311.2mm]

See Notes for Ordering Information



Style: 2021R


PC: 125

Frame: PC125 x 0.6

Min. Size: 10x12 $\frac{1}{4}$

[254mm x 311.2mm]

See Notes for Ordering Information



Style: 3056L


PC: 125

Frame: PC125 x 0.6

Min. Size: 12x12

[304.8mm x 304.8mm]

See Notes for Ordering Information



Style: 3056R


PC: 125

Frame: PC125 x 0.6

Min. Size: 12x12

[304.8mm x 304.8mm]

See Notes for Ordering Information




Style: 10*
Drawer Front

PC: 101

Frame: PC101 x 0.6

Min. Size: 8x8

[203.2mm x 203.2mm]




Style: 1010*
Drawer Front

PC: 103

Frame: PC103 x 0.6

Min. Size: 13 $\frac{3}{4}$ x8

[349.3mm x 203.2mm]




Style: 1026*
Drawer Front

PC: 118

Frame: NA

Min. Size: 6 $\frac{5}{8}$ x3

[168.3mm x 76.2mm]




Style: 1800*
Drawer Front

PC: 118

Frame: PC118 x 0.6

Min. Size: 8x8

[203.2mm x 203.2mm]



Style: 1801*
Drawer Front

PC: 101

Frame: PC101 x 0.6

Min. Size: 8x8

[203.2mm x 203.2mm]

► For PRICING ► See Section [B.1](#) in our current Wholesale Pricing Catalog.

Traditional Mortise & Tenon - Raised Panel

Cabinet Door & Drawer Front Options

Ordering & Pricing Notes: Traditional Mortise & Tenon Raised Panel Door and Drawer Fronts

B

Ordering Guidelines

1	Order Forms	Please use <i>Door and/or Drawer Front Order Forms (E•Z Forms #2 and #3)</i> .
Pricing		
1	Pricing	Please see <i>Section B.1</i> of our current Wholesale Pricing Catalog .

Technical Notes: Traditional Mortise & Tenon Raised Panel Door and Drawer Fronts

Cabinet Door & Drawer Front Options (Chapter B)

1	Frame & Mullion Doors	Glass openings are routed to follow the contour of the shape for Styles 1020, 1055, 1060, 1065, 1070, 1075, 1080, 1090, 2011L, 2011R, 2021L, 2021R, 2077L, 2077R, 2100L, 2100R, 2121L, 2121R, 2156, 2187, 2231L, 2231R, 2232L, 2232R, 2234, 2235, 2284L, 2284R, 2287 (Center rail only), 2289L, 2289R, 2416, 2418, 2498L, 2498R, 2501L, 2501R, 2563L, 2563R, 2631L, 2631R, 2834, 2928, 3056L, 3056R . For pricing, please see <i>Section B.12</i> of our current Wholesale Pricing Catalog .
2	Style 1026*	Only available as a drawer front. Only available in solid wood and raw MDF (not available in a hybrid species). Maximum height is 12" [304.8mm]. Heights up to 6" [152.4mm] will be constructed without glue-ups whenever possible. Available with the SR100 stile & rail profile from <i>Section E.1</i> or any Mirror Joint stile & rail profile from <i>Section E.2</i> . • When paired with any stile & rail door (ex: Style 10, Style 40, etc.), the door must utilize the same stile & rail profile and have the same width stiles as the 1026* drawer front.
3	Style 1055, 1065, 1075	The width of the stiles and rails is fixed at 2¼" [57.2mm] (at the narrowest point). Radius is fixed at 1¾" [44.5mm]. Please submit requests for all other dimensions to our Customer Support Team. • Additional charges will apply.
4	Style 2021L, 2021R	Minimum radius = 2" [50.8mm]. The radius will equal 90 degrees of an arc on the outside edge. The horizontal dimension of the curved stile (as shown in the illustration) equals the radius. <i>These door style illustrations depict a 14" x 18" [355.6mm x 457.2mm] door with a curved stile radius of 5" [127mm].</i> The vertical dimension of the curved stile (as shown in the illustration) equals the radius plus the width of the top rail. <i>Based on the 14" x 18" [355.6mm x 457.2mm] door size illustrated along with the 5" [127mm] radius, this dimension would be 7¼" [184.2mm].</i> When ordering, please provide the overall width and height of the door and note the horizontal dimension (radius) in the Special Instructions column on the order form. A CAD drawing must be approved prior to manufacturing the product.
5	Style 2156	Width cannot be greater than the height. • Minimum visual opening width for center circle is 7¼" [184.2mm]. Minimum height must be 2 times the width minus 4" [101.6mm]. Available with all "Traditional" and Old World "Traditional" stile and rail profiles. The center panel is ¾" [15.9mm] thick and is flush to the stiles & rails on the face and recessed ¼" [3.2mm] from the back. When ordered in a rustic grade, the center rail/circle will not have large knots. It may contain small knots or possibly, no knots at all. WalzCraft will try to maintain a rustic grade look utilizing other characteristics. See <i>Section S.1</i> for more information on rustic grades. A CAD drawing must be approved prior to manufacturing the product.
6	Style 2231L, 2231R	Please provide overall width (W) and height (H). Angles will vary as dimensions vary. A CAD drawing must be approved prior to manufacturing the product.
7	Style 2232L, 2232R, 2234	Please provide overall width (W) and height (H), as well as the secondary width (W2) at the top of door. Angles will vary as dimensions vary. A CAD drawing must be approved prior to manufacturing the product.
8	Style 2235	Please provide overall width (W) and height (H), as well as the secondary width (W2) at the top of door. Angles will vary as dimensions vary. Center stile will be centered on width (50/50 split), unless otherwise noted. A CAD drawing must be approved prior to manufacturing the product.

Continued on next page...

► For **PRICING** ► See *Section B.1* in our current Wholesale Pricing Catalog.

Technical Notes: "Traditional" Mortise & Tenon Raised Panel Door and Drawer Fronts...continued

Cabinet Door & Drawer Front Options (Chapter B)...continued

9	Style 2284L, 2284R	Please provide overall width (W) and height (H), as well as the secondary height (H2) along the side of door.
		Angles will vary as dimensions vary.
		A CAD drawing must be approved prior to manufacturing the product.
10	Style 2289L, 2289R	Please provide overall width (W) and height (H), as well as the secondary width (W2) at the top of door and the secondary height (H2) at the side of the door.
		Angle will vary as dimensions vary.
		Center rail is shown at its highest point, which is also its standard placement, unless otherwise noted.
11	Style 2631L, 2631R	A CAD drawing must be approved prior to manufacturing the product.
		Please provide overall width (W) and height (H), as well as the secondary width (W2) at the top of door and the secondary height (H2) at the side of the door.
		Angle will vary as dimensions vary.
12	Style 2928	A CAD drawing must be approved prior to manufacturing the product.
		Overall width of door and stile & rail width will determine size of interior diamond.
		Sides of interior diamond will remain equal in length to one another.
13	Style 3056L & 3056R	Angles are fixed at 45°.
		Minimum radius = 2" [50.8mm]. The radius will equal 90 degrees of an arc on the outside edge.
		The horizontal dimension of the curved rail (as shown in the illustration) equals the radius. <i>These door style illustrations depict a 14" x 18" [355.6mm x 457.2mm] door with a curved stile radius of 5" [127mm].</i>
14	Style 8060	The vertical dimension of the curved rail (as shown in the illustration) equals the radius. <i>These door style illustrations depict a 14" x 18" [355.6mm x 457.2mm] door with a curved stile radius of 5" [127mm].</i>
		When ordering, please provide the overall width and height of the door and note the horizontal dimension (radius) in the Special Instructions column on the order form.
		A CAD drawing must be approved prior to manufacturing the product.
15	Style 8160	A CAD drawing must be approved prior to manufacturing the product.
		Style 8060 is constructed with alternating 40/60 splits.
		Style 8160 is constructed with a 50/50 split in both the width and height.

Convex/Concave Options (Chapter D)

1	Available Products	The  indicates door styles that are available convex/concave (curved). See Chapter D for more information.
2	Raw MDF	Traditional mortise & tenon doors and drawer fronts made from MDF or MDF-MR are not available convex/concave.

Finish Options (Chapter R)

1	Raw MDF	See Finishing Methods (Section R.2) for information on MDF or MDF-MR with Primed Only for Paint or SolidTone® colors.
		Traditional mortise & tenon doors and drawer fronts made from MDF or MDF-MR are not available with 3D Laminate.

Continued on next page...


► For PRICING ► See Section [B.1](#) in our current Wholesale Pricing Catalog.

Technical Notes: "Traditional" Mortise & Tenon Raised Panel Door and Drawer Fronts...continued

Functional Options (Chapter F)

1	Finger Pulls	Available with FP100, FP200, FP400 and FP500 from <i>Section F.7</i> .
		Please see the Outside Edge Profile Compatibility chart on our website: Resources/Technical Information .
2	Hinge Boring	Hinge boring is available for all "Traditional" Mortise & Tenon - Raised Panel doors and drawer fronts. Please see <i>Section F.1</i> for additional hinge boring requirements, ordering instructions and compatibility.

General Information (Chapter A)

1	Grain Direction	Arrows (↔) shown indicate standard grain direction. Grain direction may be specified at NO additional cost.
		<i>Corner blocks</i> on all applicable door styles (ex: Style 1080) will have a standard <i>horizontal</i> grain direction. 
2	Ready to Assemble	Traditional mortise & tenon raised panel doors and drawer fronts are available Ready to Assemble (RTA).
3	Center Rail Placement	Custom center rail placement may be specified and refers to the distance from the top of the top rail to the top of the center rail for most door styles (<i>see below for exceptions</i>).
		Styles 2156, 2424, 2171, 2416, 2456, 2928: For custom rail placement, measure from the top of the door to the center of the center rail.
		Styles 2563L, 2563R: For custom rail placement, measure from the top of the door to the center of the center rail at its highest point.
		Style 2287: For custom rail placement, measure from the top of the door to the bottom of the center rail at its lowest point.
		See Center Rail Placement in <i>Section A.4</i> for more information.
4	Stile & Rail Dimensions	Standard stile and rail dimensions are 2¼" [57.2mm] wide. Non-standard part sizes may be ordered, however, additional up-charges may apply. See <i>Section A.5</i> for more information.

Material Options

1	Materials Available	Available in all of the species/grades noted in <i>Section B.1</i> of our current Wholesale Pricing Catalog . • See individual door style notes for exceptions.
2	Door Style 2156 Hybrid/MDF	When ordering door style 2156 in Hybrid/MDF (solid wood stiles & rails with raw MDF center panel), the center rail / circle will be made from raw MDF for SolidTone® or Primed Only for Paint applications.

Molding Options (Chapter N)

1	Applied Moldings on MDF	When an applied molding is added to an MDF product, the molding will be made from Maple - Hard/Soft Mixed Value/Budget/Paint Grade.
---	-------------------------	--

Profile Options (Chapter E)

1	Door Styles 25, 2550, 2727, 2826	When adding an applied molding to the stiles and rails of these door styles, the molding for the arched rails will be made from two pieces, so as to have a miter joint at the peak of the arch.
---	----------------------------------	--

Continued on next page...

► For PRICING ► See Section B.1 in our current Wholesale Pricing Catalog.

Technical Notes: "Traditional" Mortise & Tenon Raised Panel Door and Drawer Fronts...continued**Sizes/Dimensions**


1	Minimum W x H	Use the dimensions noted below the image of your chosen door style on the preceding pages.
2	Thicknesses	When using Traditional stile and rail profiles, Traditional Mortise & Tenon raised panel doors and DFs made from solid wood are available ¾" [19.3mm] and 1" [25.4mm] thick. When using Old World stile and rail profiles, Traditional Mortise & Tenon raised panel doors and DFs made from solid wood are available 1" [25.4mm], 1⅝" [28.6mm] and 1¼" [31.8mm] thick. See Section S.3 for possible thickness restrictions based on wood species. Traditional mortise & tenon raised panel doors and DFs made from raw MDF are available ¾" [19.1mm] and 1" [25.4mm] thick. Traditional mortise & tenon raised panel doors and DFs made from raw MDF-MR are only available ¾" [19.1mm] thick. Old World mortise & tenon raised panel doors and DFs made from raw MDF are only available 1" [25.4mm] thick.
3	MDF Maximum Size	The maximum size for a Traditional mortise & tenon door made from raw MDF or MDF-MR will be 48" x 96" [1219.2mm x 2438.4mm] or 96" x 48" [2438.4mm x 1219.2mm].
4	Maximum Width for Doors with Shaped Rails	The maximum width for a WalzCraft standard door with a shaped rail or rails is 30" [762.0mm] - (based on 2¼" [57.2mm] wide stiles). • Please submit requests for doors with shaped rails over 30" wide to our Customer Support Team, as additional charges may apply. • This does not include doors made with corner blocks (Price Classes 107, 111, 114, 121, 124, 128, 129).

Traditional Mortise & Tenon Raised Panel Doors and Drawer Fronts - END

► For PRICING ► See Section **B.1** in our current Wholesale Pricing Catalog.

Quarter Circle Doors - Raised Panel

B

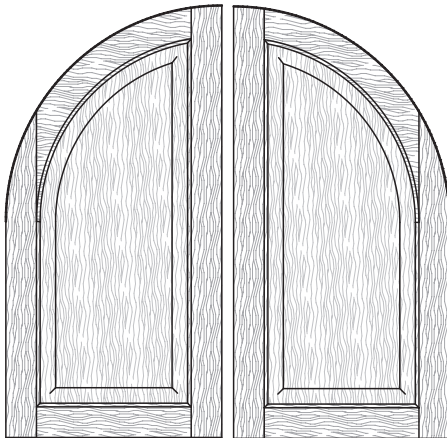


Style: 995L

PC: 906
Frame: PC906 x 0.6
Min. Size: 8x11½
[203.2mm x 292.1mm]
Outside Radius

Style: 995R

PC: 906
Frame: PC906 x 0.6
Min. Size: 8x11½
[203.2mm x 292.1mm]
Outside Radius

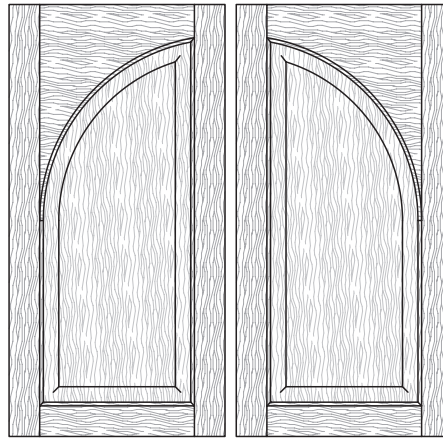

Style: 996L

PC: 905
Frame: PC905 x 0.6
Min. Size: 8x11½
[203.2mm x 292.1mm]
Outside Radius

Style: 996R

PC: 905
Frame: PC905 x 0.6
Min. Size: 8x11½
[203.2mm x 292.1mm]
Outside Radius



Style: 2431L


PC: 907
Frame: PC907 x 0.6
Min. Size: 8x16¼
[203.2mm x 412.8mm]
Outside Radius

Style: 2431R

PC: 907
Frame: PC907 x 0.6
Min. Size: 8x16¼
[203.2mm x 412.8mm]
Outside Radius

Quarter Circle Radius Explanation
The difference between Outside & Inside Radius


All **Outside Radius** doors feature a radius that is measured from the **outside edge** of the door stile.

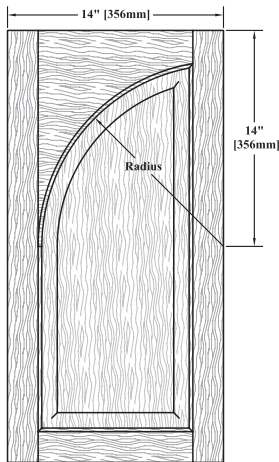

To Calculate Radius Center Point:


From door width,
Measure down from the top of the door and mark the radius center point on the outside edge of the stile.

All **Inside Radius** doors feature a radius that is measured from the **inside edge** of the door stile.

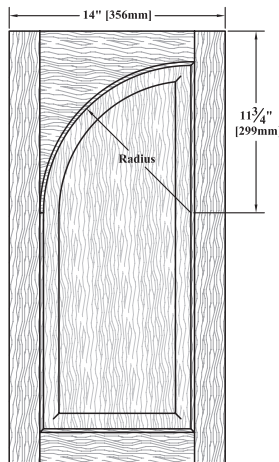

To Calculate Radius Center Point:

Door width minus the Stile Width: 2¼" [57.2mm],
Measure down from the top of the door and mark the radius center point on the inside edge of the stile.

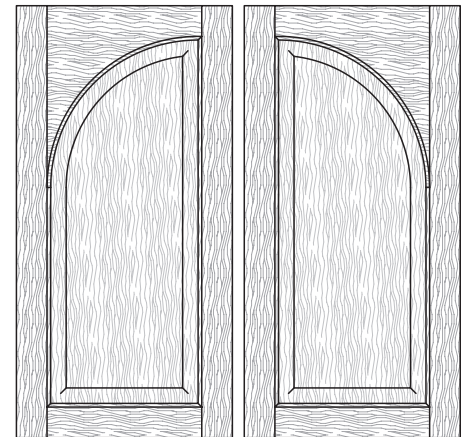

Style: 997L


PC: 905
Frame: PC905 x 0.6
Min. Size: 8x9¼
[203.2mm x 235mm]
Inside Radius

Style: 997R


PC: 905
Frame: PC905 x 0.6
Min. Size: 8x9¼
[203.2mm x 235mm]
Inside Radius

► For PRICING ► See Section B.2 in our current Wholesale Pricing Catalog.


Half Circle Doors - Raised Panel

**Style: 1990**


PC: 906
 Frame: PC906 x 0.6
 Min. Size: 9x8
 [228.6mm x 203.2mm]

**Style: 1996**


PC: 905
 Frame: PC905 x 0.6
 Min. Size: 9x8
 [228.6mm x 203.2mm]

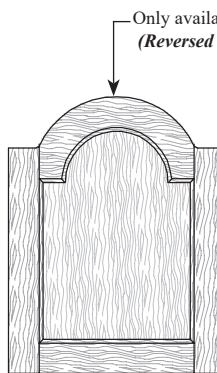**Style: 2903**


PC: 906
 Frame: PC906 x 0.6
 Min. Size: 12x12
 [304.8mm x 304.8mm]

**Style: 2902**


PC: 905
 Frame: PC905 x 0.6
 Min. Size: 12x12
 [304.8mm x 304.8mm]

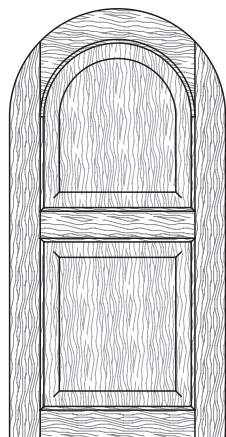**Style: 2960**


PC: 909
 Frame: PC909 x 0.6
 Min. Size: 9x13
 [228.6mm x 330.2mm]

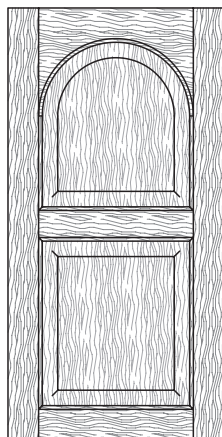**Style: 2962**

PC: 908
 Frame: PC908 x 0.6
 Min. Size: 9x13
 [228.6mm x 330.2mm]

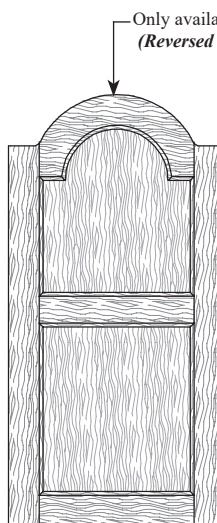**Style: 2964**

PC: 909
 Frame: PC909 x 0.6
 Min. Size: 12x17
 [304.8mm x 431.8mm]

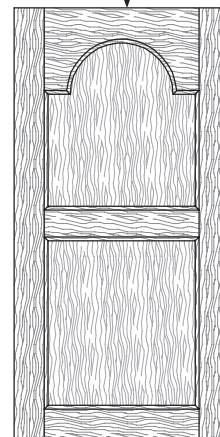**Style: 2966**

PC: 908
 Frame: PC908 x 0.6
 Min. Size: 12x17
 [304.8mm x 431.8mm]

Ordering & Pricing Notes: Quarter & Half Circle Doors - Raised Panel**Ordering Guidelines**

1	Order Forms	Please use <i>Door Order Form (E•Z Form #2)</i> .
----------	--------------------	---

Pricing

1	Pricing	Please see <i>Section B.2</i> of our current Wholesale Pricing Catalog .
----------	----------------	---

Continued on next page...

► **For PRICING** ► See *Section B.2* in our current Wholesale Pricing Catalog.

Technical Notes: Quarter & Half Circle Doors - Raised Panel**Cabinet Door & Drawer Front Options (Chapter B)**

1	Frame & Mullion Doors	Glass openings are routed to follow the contour of the shape for Styles 995L, 995R, 996L, 996R, 997L, 997R, 1990, 1996, 2431L, 2431R, 2902, 2903, 2960, 2962, 2964, 2966. For pricing, please see <i>Section B.12</i> of our current Wholesale Pricing Catalog .
2	Radius Explanation	See beginning of this section (<i>B.2</i>) for an explanation of Inside and Outside radius door measurements.
3	Styles 2902, 2966	Available with all "Traditional" and Old World "Traditional" Stile and Rail profiles.
		Available with all Outside Edge Profiles.
		A CAD drawing must be approved prior to manufacturing the product.
4	Style 2903, 2964	Available with all "Traditional" and Old World "Traditional" Stile and Rail profiles.
		Only available with the following Outside Edge Profiles: D7, D12, D15, D17, D18, D21, D24, D32, D41, D52, D67, D93, D101, D102, D115, D118, D120.
		A CAD drawing must be approved prior to manufacturing the product.
5	Center Rail Placement	Center rail placement must be specified and refers to the distance from the top of the top rail to the top of the center rail for most door styles. See Center Rail Placement in <i>Section A.4</i> for more information.

Functional Options (Chapter F)

1	Hinge Boring	Hinge boring is available for all Quarter & Half Circle - Raised Panel doors. Please see <i>Section F.1</i> for additional hinge boring requirements, ordering instructions and compatibility.
---	--------------	--

General Information (Chapter A)

1	Ready to Assemble (RTA)	RTA is <i>not</i> available as an option.
---	-------------------------	---

Profile Options (Chapter E)

1	Stile & Rail Profile Options	Compatible with all "Traditional" and "Old World" stile and rail profiles (excluding Mirror Joints).
2	Style 2902, 2903, 2964, 2966	Only available with the RVSCP-PR324 reverse solid center panel profile (<i>Section E.13</i>).


Sizes/Dimensions

1	Door Widths	Styles 995L/R, 996L/R, 997L/R, 1990, 1996, 2431L/R, 2960 and 2962 widths can only be ordered in ¼" [6.4mm] increments.
		Styles 2902, 2903, 2964 and 2966 are available from 12" [304.8mm] to 24" [609.6mm] wide in 1" [25.4mm] increments only.
2	Outside Radius	Style 995L, 995R, 996L, 996R: The height must be at least 2¼" [57.2mm] greater than the width. Style 2431L, 2431R: The height must be at least two times the width of the door.
3	Inside Radius	Height must be equal to or greater than the width.
4	Half Circle Doors	Width must be less than or equal to the door height, less the width of the (bottom rail x 2). Height must be greater than or equal to ½ of the door width, plus the width of the bottom rail and center rail (if applicable).
5	Stile & Rail Widths	- Traditional Quarter and Half Circle doors will have stile/rail width fixed at 2¼" [57.2mm] wide. - Old World Quarter and Half Circle doors will have stile/rail width fixed at 3" [76.2mm] wide. - Please submit requests for other widths to our Customer Support Team as additional charges may apply.
6	Thicknesses	When using Traditional stile and rail profiles, Quarter Circle and Half Circle raised panel doors made from solid wood are available ¾" [19.3mm] and 1" [25.4mm] thick.
		When using Old World stile and rail profiles, Quarter Circle and Half Circle raised panel doors made from solid wood are available 1" [25.4mm], 1½" [28.6mm] and 1¼" [31.8mm] thick.
		See <i>Section S.3</i> for possible thickness restrictions based on wood species.

Quarter & Half Circle Raised Panel Doors - END


► For PRICING ► See Section B.2 in our current Wholesale Pricing Catalog.

Gothic Doors - Raised Panel

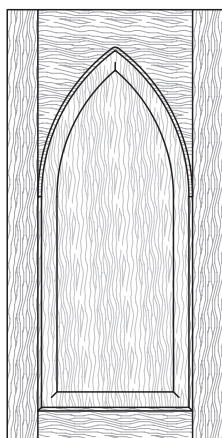

Style: 9100

PC: 905
 Frame: PC905 x 0.6
 Min. Size: 10x11
 [254mm x 279.4mm]

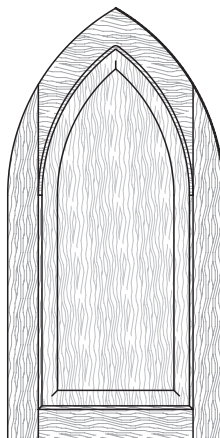

Style: 9200

PC: 906
 Frame: PC906 x 0.6
 Min. Size: 10x11
 [254mm x 279.4mm]

Ordering & Pricing Notes: Gothic Doors - Raised Panel

Ordering Guidelines

1	Order Forms	Please use <i>Door Order Form (E•Z Form #2)</i> .
---	-------------	---

Pricing

1	Pricing	Please see <i>Section B.2</i> of our current Wholesale Pricing Catalog .
---	---------	---

Technical Notes: Gothic Doors - Raised Panel

Cabinet Door & Drawer Front Options (Chapter B)

1	Frame & Mullion Doors	Glass openings will be routed to follow the contour of the shape for Styles 9100 and 9200 . For pricing, please see <i>Section B.12</i> of our current Wholesale Pricing Catalog .
---	-----------------------	---

Functional Options (Chapter F)

1	Hinge Boring	Hinge boring is available for all Gothic - Raised Panel doors. Please see <i>Section F.1</i> for additional hinge boring requirements, ordering instructions and compatibility.
---	--------------	---

Profile Options (Chapter E)

1	Stile & Rail Profile Options	Compatible with all "Traditional" and "Old World" stile and rail profiles (excluding Mirror Joints). Mitered Stile and Rail profiles are <u>not</u> an option for Gothic doors.
---	------------------------------	--

Sizes/Dimensions

1	Minimum Height	Minimum height equals door width plus 1" [25.4mm].
2	Absolute Minimum Width	The absolute minimum width for a raised panel Gothic door is 10" [254.0mm].
3	Top Rail Width	In order to maintain the "look" and shape of the Gothic arch, the width of the top rail at the peak of the arch will vary slightly from the width of the remaining stiles and rail. This dimension will also fluctuate based on the overall width of the door. If needing to specify this dimension, please submit your request to our Customer Support Team.
4	Thicknesses	When using Traditional stile and rail profiles, Gothic raised panel doors made from solid wood are available ¾" [19.3mm] and 1" [25.4mm] thick. When using Old World stile and rail profiles, Gothic raised panel doors made from solid wood are available 1" [25.4mm], 1¼" [28.6mm] and 1½" [31.8mm] thick. See <i>Section S.3</i> for possible thickness restrictions based on wood species.

Gothic Raised Panel Doors - END


► For PRICING ► See *Section B.2* in our current Wholesale Pricing Catalog.

[illegible]

Cabinet Door & Drawer Front Options


Traditional Mortise & Tenon - 1/4" Flat Panel

B




Style: 40

PC: 201
Frame: PC101 x 0.6
Min. Size: 6"x6"
[168.3mm x 152.4mm]




Style: 30

PC: 202
Frame: PC102 x 0.6
Min. Size: 6"x7 1/4"
[168.3mm x 196.9mm]




Style: 3000

PC: 202
Frame: PC102 x 0.6
Min. Size: 6"x7 1/4"
[168.3mm x 196.9mm]




Style: 2220

PC: 202
Frame: PC102 x 0.6
Min. Size: 6"x7 1/4"
[168.3mm x 196.9mm]




Style: 4090

PC: 207
Frame: PC107 x 0.6
Min. Size: 9"x7 13/16"
[244.5mm x 198.4mm]




Style: 4040

PC: 203
Frame: PC103 x 0.6
Min. Size: 9"x6"
[247.7mm x 168.3mm]




Style: 3030

PC: 206
Frame: PC106 x 0.6
Min. Size: 6"x9 1/2"
[263.5mm x 241.3mm]




Style: 5000

PC: 206
Frame: PC106 x 0.6
Min. Size: 6"x9 1/2"
[168.3mm x 241.3mm]




Style: 2230

PC: 206
Frame: PC106 x 0.6
Min. Size: 6"x9 1/2"
[294.5mm x 241.3mm]




Style: 4080

PC: 211
Frame: PC111 x 0.6
Min. Size: 9"x9 5/8"
[244.5mm x 244.5mm]




Style: 7020

PC: 204
Frame: PC104 x 0.6
Min. Size: 12x11
[304.8mm x 279.4mm]




Style: 3500

PC: 202
Frame: PC102 x 0.6
Min. Size: 6"x6 1/4"
[168.3mm x 158.8mm]




Style: 3535

PC: 206
Frame: PC106 x 0.6
Min. Size: 6"x9 1/2"
[168.3mm x 241.3mm]




Style: 2071L

PC: 202
Frame: PC102 x 0.6
Min. Size: 6"x7 1/4"
[168.3mm x 196.9mm]




Style: 2071R

PC: 202
Frame: PC102 x 0.6
Min. Size: 6"x7 1/4"
[168.3mm x 196.9mm]




Style: 7030

PC: 209
Frame: PC109 x 0.6
Min. Size: 12x12 1/2"
[304.8mm x 317.5mm]




Style: 2002L

PC: 202
Frame: PC102 x 0.6
Min. Size: 6"x7 1/4"
[168.3mm x 196.9mm]




Style: 2002R

PC: 202
Frame: PC102 x 0.6
Min. Size: 6"x7 1/4"
[168.3mm x 196.9mm]



Style: 2202L

PC: 202
Frame: PC102 x 0.6
Min. Size: 6"x7 1/4"
[168.3mm x 196.9mm]



Style: 2202R

PC: 202
Frame: PC102 x 0.6
Min. Size: 6"x7 1/4"
[168.3mm x 196.9mm]

► For PRICING ► See Section B.3 in our current Wholesale Pricing Catalog.

B.3.1

V18.2



WalzCraft.com



(Phone) 1-800-237-1326


6:00AM - 5:30PM CST

(24 Hour Fax) 1-608-781-3667

Traditional Mortise & Tenon - 1/4" Flat Panel


Cabinet Door & Drawer Front Options

B




Style: 3800L

PC: 202
Frame: PC102 x 0.6
Min. Size: 12x7 1/4
[304.8mm x 196.9mm]




Style: 3800R

PC: 202
Frame: PC102 x 0.6
Min. Size: 12x7 1/4
[304.8mm x 196.9mm]




Style: 3838L

PC: 206
Frame: PC106 x 0.6
Min. Size: 12x9 1/2
[304.8mm x 244.5mm]




Style: 3838R

PC: 206
Frame: PC106 x 0.6
Min. Size: 12x9 1/2
[304.8mm x 244.5mm]




Style: 31

PC: 202
Frame: PC102 x 0.6
Min. Size: 6 1/2 x 6 1/4
[168.3mm x 157.2mm]




Style: 4060

PC: 207
Frame: PC107 x 0.6
Min. Size: 9 1/2 x 7 1/4
[244.5mm x 198.4mm]




Style: 4070

PC: 211
Frame: PC111 x 0.6
Min. Size: 9 1/2 x 9 1/2
[244.5mm x 244.5mm]




Style: 3005

PC: 202
Frame: PC102 x 0.6
Min. Size: 6 1/2 x 6 1/4
[168.3mm x 160.3mm]




Style: 3055

PC: 206
Frame: PC106 x 0.6
Min. Size: 6 1/2 x 9 1/2
[168.3mm x 241.3mm]




Style: 3010

PC: 231
Frame: PC131 x 0.6
Min. Size: 9 1/2 x 11 1/4
[247.7mm x 285.8mm]




Style: 2072L

PC: 223
Frame: PC123 x 0.6
Min. Size: 6 1/2 x 7 1/4
[168.3mm x 196.9mm]




Style: 2072R

PC: 223
Frame: PC123 x 0.6
Min. Size: 6 1/2 x 7 1/4
[168.3mm x 196.9mm]



Style: 4050

PC: 207
Frame: PC107 x 0.6
Min. Size: 10 1/2 x 8 1/4
[266.7mm x 209.6mm]




Style: 4055

PC: 211
Frame: PC111 x 0.6
Min. Size: 10 1/2 x 10 1/2
[266.7mm x 266.7mm]




Style: 3160

PC: 215
Frame: PC115 x 0.6
Min. Size: 11 x 9 1/4
[279.4mm x 247.7mm]




Style: 1400

PC: 218
Frame: PC118 x 0.6
Min. Size: 6 1/2 x 6
[168.3mm x 152.4mm]




Style: 1401

PC: 201
Frame: PC101 x 0.6
Min. Size: 6 x 6 1/2
[152.4mm x 168.3mm]




Style: 2012L

PC: 223
Frame: PC123 x 0.6
Min. Size: 6 1/2 x 7 1/4
[168.3mm x 196.9mm]



Style: 2012R

PC: 223
Frame: PC123 x 0.6
Min. Size: 6 1/2 x 7 1/4
[168.3mm x 196.9mm]



Style: 3170


PC: 215
Frame: PC115 x 0.6
Min. Size: 11 x 11 1/2
[279.4mm x 292.1mm]

► For PRICING ► See Section B.3 in our current Wholesale Pricing Catalog.

Cabinet Door & Drawer Front Options

Traditional Mortise & Tenon - 1/4" Flat Panel

B




Style: 3187

PC: 223

Frame: PC123 x 0.6
Min. Size: 6"x7"

[168.3mm x 196.9mm]




Style: 3100L

PC: 221

Frame: PC121 x 0.6
Fixed Min: 12x9"

[304.8mm x 231.8mm]




Style: 3100R

PC: 221

Frame: PC121 x 0.6
Fixed Min: 12x9"

[304.8mm x 231.8mm]




Style: 3131L

PC: 224

Frame: PC124 x 0.6
Fixed Min: 12x10"

[304.8mm x 276.2mm]




Style: 3131R

PC: 224

Frame: PC124 x 0.6
Fixed Min: 12x10"

[304.8mm x 276.2mm]




Style: 3060L

PC: 232

Frame: PC132 x 0.6
Min. Size: 11x11"

[279.4mm x 285.8mm]




Style: 3060R

PC: 232

Frame: PC132 x 0.6
Min. Size: 11x11"

[279.4mm x 285.8mm]




Style: 2413

PC: 219

Frame: PC119 x 0.6
Min. Size: 9x7 3/4"

[228.6mm x 196.9mm]




Style: 2414

PC: 230

Frame: PC130 x 0.6
Min. Size: 9x7 3/4"

[228.6mm x 196.9mm]




Style: 2415

PC: 220

Frame: PC120 x 0.6
Min. Size: 9x10 1/8"

[228.6mm x 257.2mm]




Style: 2434

PC: 218

Frame: PC118 x 0.6
Min. Size: 6x6

[152.4mm x 152.4mm]




Style: 2435

PC: 206

Frame: PC106 x 0.6
Min. Size: 6"x6

[168.3mm x 152.4mm]

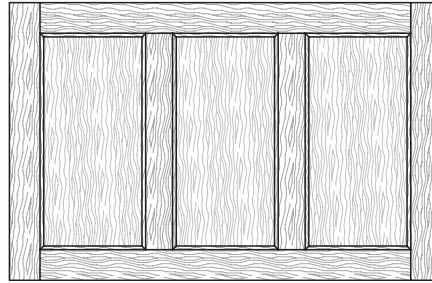


Style: 4020

PC: 208

Frame: PC108 x 0.6
Min. Size: 15 3/8"x6 1/8"

[390.5mm x 168.3mm]

See Notes for
Ordering Information




Style: 3291L

PC: 231

Frame: PC131 x 0.6
Min. Size: 11x9"

[279.4mm x 247.7mm]



Style: 3291R

PC: 231

Frame: PC131 x 0.6
Min. Size: 11x9"

[279.4mm x 247.7mm]

► For PRICING ► See Section B.3 in our current Wholesale Pricing Catalog.

B.3.3

V18.2



WalzCraft.com



(Phone) 1-800-237-1326


6:00AM - 5:30PM CST

(24 Hour Fax) 1-608-781-3667

Traditional Mortise & Tenon - 1/4" Flat Panel


Cabinet Door & Drawer Front Options

B




Style: 4150

PC: 232
Frame: PC132 x 0.6
Min. Size: 9³/₄x15
[247.7mm x 381mm]



Style: 4044

PC: 203
Frame: PC103 x 0.6
Min. Size: 6⁵/₈x9³/₄
[168.3mm x 247.7mm]




Style: 4043

PC: 203
Frame: PC103 x 0.6
Min. Size: 6⁵/₈x11¹/₄
[168.3mm x 285.8mm]




Style: 4041

PC: 203
Frame: PC103 x 0.6
Min. Size: 6⁵/₈x12³/₄
[168.3mm x 323.9mm]

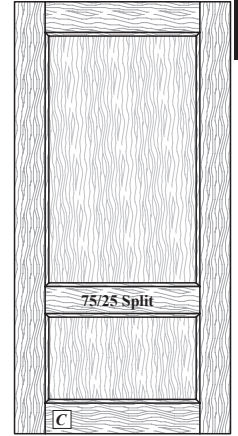


Style: 4045

PC: 203
Frame: PC103 x 0.6
Min. Size: 6⁵/₈x12³/₄
[168.3mm x 323.9mm]

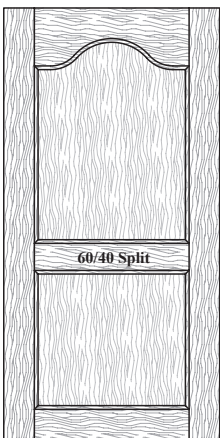

Style: 2040

PC: 205
Frame: PC105 x 0.6
Min. Size: 6⁵/₈x12⁵/₃₂
[168.3mm x 308.8mm]



Style: 3040

PC: 205
Frame: PC105 x 0.6
Min. Size: 6⁵/₈x13
[168.3mm x 330.2mm]




Style: 2240

PC: 205
Frame: PC105 x 0.6
Min. Size: 6⁵/₈x12⁵/₃₂
[168.3mm x 308.8mm]




Style: 3105

PC: 205
Frame: PC105 x 0.6
Min. Size: 6⁵/₈x10¹/₂
[168.3mm x 266.7mm]

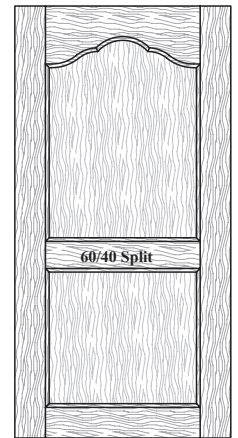


Style: 3505

PC: 205
Frame: PC105 x 0.6
Min. Size: 6⁵/₈x10¹/₂
[168.3mm x 266.7mm]

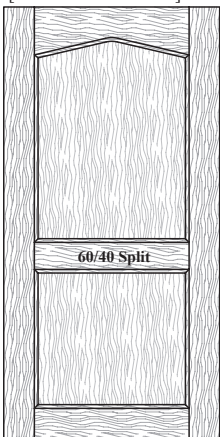


Style: 3550

PC: 205
Frame: PC105 x 0.6
Min. Size: 6⁵/₈x10¹/₂
[168.3mm x 266.7mm]

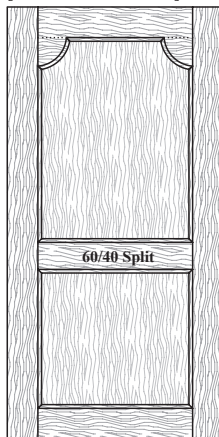

Style: 4010

PC: 214
Frame: PC114 x 0.6
Min. Size: 9³/₄x12⁵/₁₆
[244.5mm x 312.7mm]

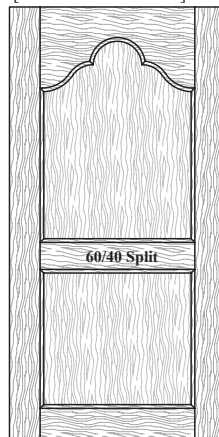


Style: 7040

PC: 213
Frame: PC113 x 0.6
Min. Size: 12x14¹/₄
[304.8mm x 362mm]



Style: 3333

PC: 212
Frame: PC112 x 0.6
Min. Size: 6⁵/₈x13³/₄
[168.3mm x 336.6mm]

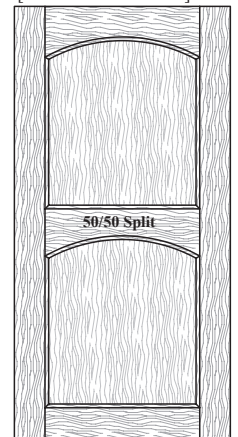

Style: 3025


PC: 212
Frame: PC112 x 0.6
Min. Size: 6⁵/₈x13
[168.3mm x 330.2mm]

► For PRICING ► See Section B.3 in our current Wholesale Pricing Catalog.

Cabinet Door & Drawer Front Options


Traditional Mortise & Tenon - 1/4" Flat Panel

B

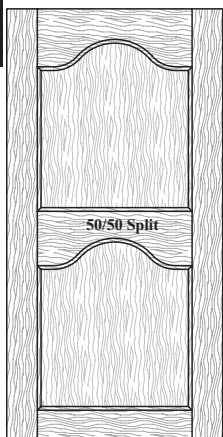


Style: 3035

PC: 212
Frame: PC112 x 0.6
Min. Size: 6 $\frac{5}{8}$ x13 $\frac{1}{4}$
[168.3mm x 336.6mm]




Style: 3036

PC: 212
Frame: PC112 x 0.6
Min. Size: 6 $\frac{5}{8}$ x13 $\frac{1}{4}$
[168.3mm x 336.6mm]

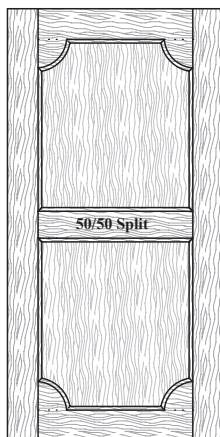


Style: 2419

PC: 228
Frame: PC128 x 0.6
Min. Size: 9 $\frac{5}{8}$ x13 $\frac{3}{4}$
[244.5mm x 339.7mm]

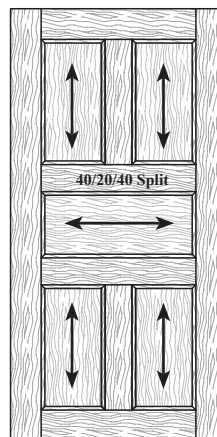


Style: 3465

PC: 236
Frame: PC136 x 0.6
Min. Size: 9 $\frac{3}{4}$ x16 $\frac{1}{2}$
[247.7mm x 419.1mm]




Style: 4030

PC: 208
Frame: PC108 x 0.6
Min. Size: 6 $\frac{5}{8}$ x15 $\frac{3}{4}$
[168.3mm x 390.5mm]

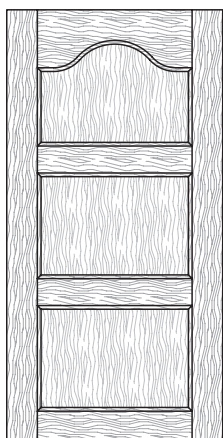

Style: 3185

PC: 210
Frame: PC110 x 0.6
Min. Size: 6 $\frac{5}{8}$ x18 $\frac{3}{4}$
[168.3mm x 476.3mm]

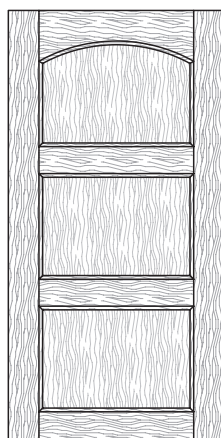


Style: 3186

PC: 210
Frame: PC110 x 0.6
Min. Size: 6 $\frac{5}{8}$ x16 $\frac{1}{2}$
[168.3mm x 419.1mm]




Style: 2428

PC: 231
Frame: PC131 x 0.6
Min. Size: 9 $\frac{3}{4}$ x12 $\frac{3}{4}$
[247.7mm x 323.9mm]

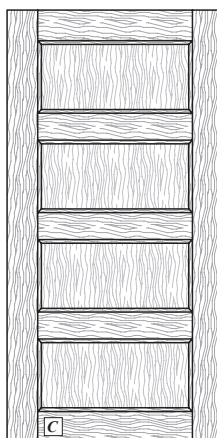


Style: 3271

PC: 215
Frame: PC115 x 0.6
Min. Size: 6 $\frac{5}{8}$ x19 $\frac{1}{4}$
[168.3mm x 501.7mm]

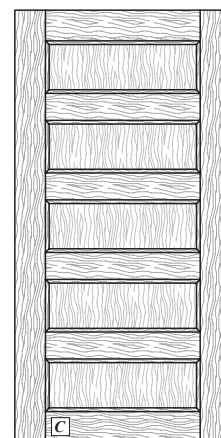

Style: 3272

PC: 217
Frame: PC117 x 0.6
Min. Size: 6 $\frac{5}{8}$ x24 $\frac{1}{4}$
[168.3mm x 612.8mm]

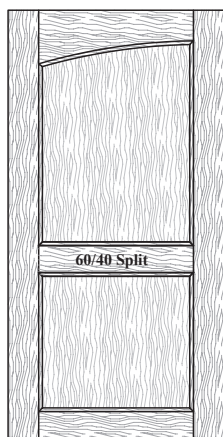


Style: 2421L

PC: 205
Frame: PC105 x 0.6
Min. Size: 6 $\frac{5}{8}$ x13
[168.3mm x 330.2mm]




Style: 2421R

PC: 205
Frame: PC105 x 0.6
Min. Size: 6 $\frac{5}{8}$ x13
[168.3mm x 330.2mm]

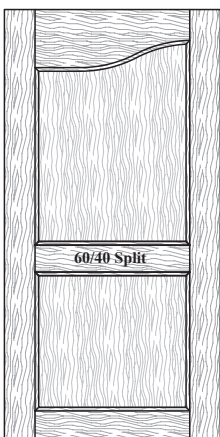

Style: 2423L

PC: 205
Frame: PC105 x 0.6
Min. Size: 6 $\frac{5}{8}$ x13
[168.3mm x 330.2mm]

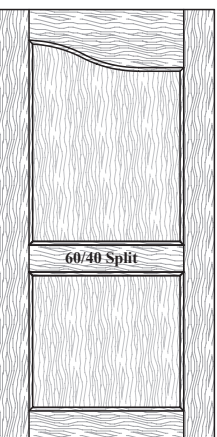

Style: 2423R

PC: 205
Frame: PC105 x 0.6
Min. Size: 6 $\frac{5}{8}$ x13
[168.3mm x 330.2mm]



Style: 2426

PC: 212
Frame: PC112 x 0.6
Min. Size: 6 $\frac{5}{8}$ x13 $\frac{1}{4}$
[168.3mm x 336.6mm]

► For PRICING ► See Section B.3 in our current Wholesale Pricing Catalog.

B.3.5

V18.2



WalzCraft.com



(Phone) 1-800-237-1326


6:00AM - 5:30PM CST

(24 Hour Fax) 1-608-781-3667

Traditional Mortise & Tenon - 1/4" Flat Panel


Cabinet Door & Drawer Front Options

B

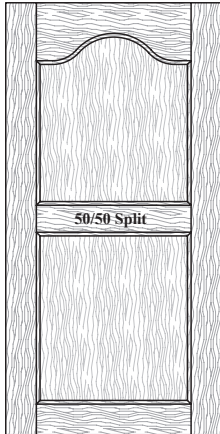


Style: 2819

PC: 205
Frame: PC105 x 0.6
Min. Size: 6 $\frac{5}{8}$ x13 $\frac{1}{4}$
[168.3mm x 336.6mm]

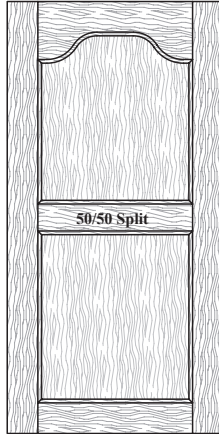


Style: 2821

PC: 205
Frame: PC105 x 0.6
Min. Size: 6 $\frac{5}{8}$ x13 $\frac{1}{4}$
[168.3mm x 336.6mm]

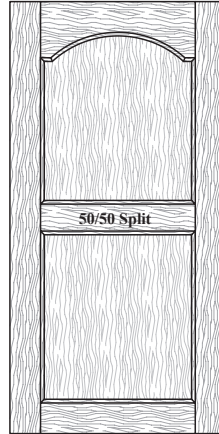


Style: 2823

PC: 205
Frame: PC105 x 0.6
Min. Size: 6 $\frac{5}{8}$ x10 $\frac{3}{4}$
[168.3mm x 263.5mm]

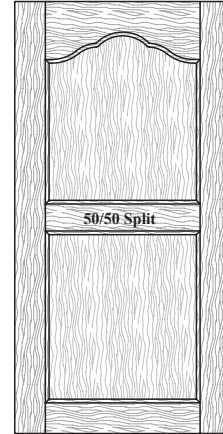


Style: 2825

PC: 205
Frame: PC105 x 0.6
Min. Size: 6 $\frac{5}{8}$ x10 $\frac{3}{4}$
[168.3mm x 261.9mm]

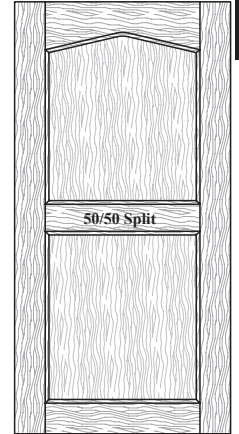


Style: 2827

PC: 205
Frame: PC105 x 0.6
Min. Size: 6 $\frac{5}{8}$ x10 $\frac{3}{4}$
[168.3mm x 258.8mm]




Style: 2837L

PC: 205
Frame: PC105 x 0.6
Min. Size: 6 $\frac{5}{8}$ x13
[168.3mm x 330.2mm]



Style: 2837R

PC: 205
Frame: PC105 x 0.6
Min. Size: 6 $\frac{5}{8}$ x13
[168.3mm x 330.2mm]




Style: 2847L

PC: 205
Frame: PC105 x 0.6
Min. Size: 6 $\frac{5}{8}$ x13
[168.3mm x 330.2mm]




Style: 2847R

PC: 205
Frame: PC105 x 0.6
Min. Size: 6 $\frac{5}{8}$ x13
[168.3mm x 330.2mm]

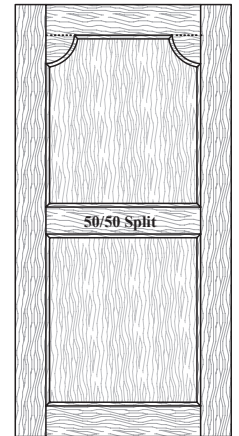


Style: 2829

PC: 214
Frame: PC114 x 0.6
Min. Size: 9 $\frac{1}{2}$ x13 $\frac{3}{4}$
[244.5mm x 339.7mm]




Style: 2831

PC: 213
Frame: PC113 x 0.6
Min. Size: 12x17
[304.8mm x 431.8mm]

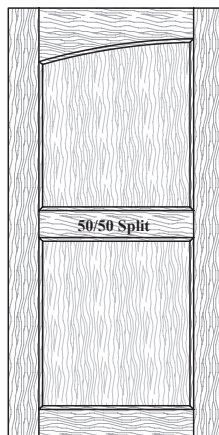


Style: 2833L

PC: 205
Frame: PC105 x 0.6
Min. Size: 6 $\frac{5}{8}$ x13
[168.3mm x 330.2mm]

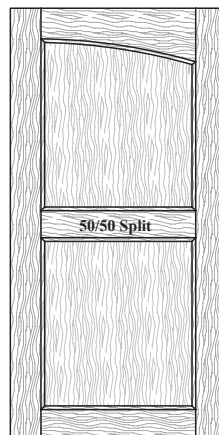


Style: 2833R

PC: 205
Frame: PC105 x 0.6
Min. Size: 6 $\frac{5}{8}$ x13
[168.3mm x 330.2mm]

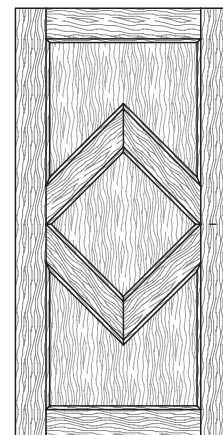

Style: 2929

PC: 227
Frame: PC127 x 0.6
Min. Size: 8x18
[203.2mm x 457.2mm]

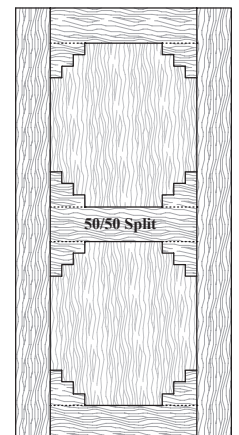


Style: 3139

PC: 229
Frame: PC129 x 0.6
Min. Size: 10 $\frac{1}{2}$ x18 $\frac{1}{4}$
[266.7mm x 476.3mm]

CL = Center Line of Center Rail

CRP = Center Rail Placement.


B

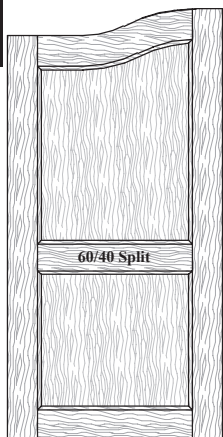**Style: 2499L**

PC: 237
 Frame: PC137 x 0.6
 Min. Size: 6"x11"
 [168.3mm x 298.5mm]

**Style: 2499R**

PC: 237
 Frame: PC137 x 0.6
 Min. Size: 6"x11"
 [168.3mm x 298.5mm]

**Style: 2502L**


PC: 237
 Frame: PC137 x 0.6
 Min. Size: 6"x12"
 [168.3mm x 320.7mm]

**Style: 2502R**


PC: 237
 Frame: PC137 x 0.6
 Min. Size: 6"x12"
 [168.3mm x 320.7mm]

**Style: 2526**


PC: 205
 Frame: PC105 x 0.6
 Min. Size: 6"x13
 [168.3mm x 330.2mm]

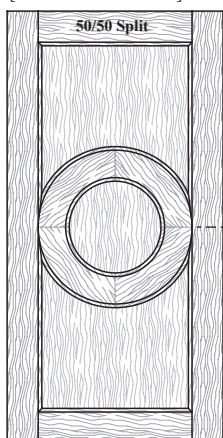**Style: 3156**


PC: 227
 Frame: PC127 x 0.6
 Min. Size: 11"x18
 [298.5mm x 457.2mm]

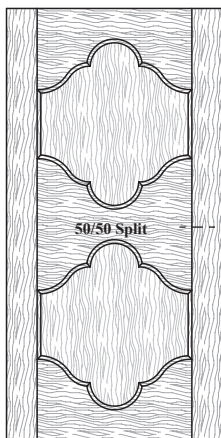**Style: 3456**

PC: 235
 Frame: PC135 x 0.6
 Min. Size: 12x22"
 [304.8mm x 577.9mm]

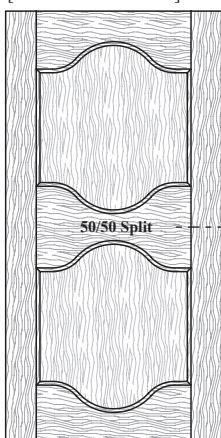**Style: 3434**


PC: 216
 Frame: PC116 x 0.6
 Min. Size: 6"x16"
 [168.3mm x 425.5mm]

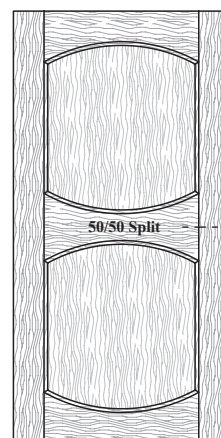**Style: 3171**


PC: 216
 Frame: PC116 x 0.6
 Min. Size: 6"x16"
 [168.3mm x 425.5mm]

**Style: 3288**


PC: 212
 Frame: PC112 x 0.6
 Min. Size: 6"x12
 [168.3mm x 304.8mm]

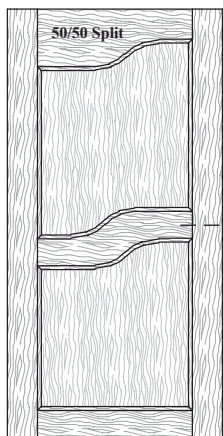**Style: 2562L**


PC: 238
 Frame: PC138 x 0.6
 Min. Size: 12x12
 [304.8mm x 304.8mm]

**Style: 2562R**

PC: 238
 Frame: PC138 x 0.6
 Min. Size: 12x12
 [304.8mm x 304.8mm]

**Style: 3287**

PC: 238
 Frame: PC138 x 0.6
 Min. Size: 6"x11"
 [168.3mm x 295.3mm]

**Style: 2417**


PC: 229
 Frame: PC129 x 0.6
 Min. Size: 9"x17
 [244.5mm x 431.8mm]

**Style: 2756**

PC: 212
 Frame: PC112 x 0.6
 Min. Size: 6"x13
 [168.3mm x 330.2mm]


CL = Center Line of Center Rail

CRP = Center Rail Placement.




Style: 3234

PC: 222
Frame: PC122 x 0.6
Min. Size: 8x8
[203.2mm x 203.2mm]
*See Notes for
Ordering Information*




Style: 3235

PC: 226
Frame: PC126 x 0.6
Min. Size: 9 1/4 x 8
[247.7mm x 203.2mm]
*See Notes for
Ordering Information*




Style: 3231L

PC: 222
Frame: PC122 x 0.6
Min. Size: 8x8
[203.2mm x 203.2mm]
*See Notes for
Ordering Information*




Style: 3231R

PC: 222
Frame: PC122 x 0.6
Min. Size: 8x8
[203.2mm x 203.2mm]
*See Notes for
Ordering Information*




Style: 3232L

PC: 222
Frame: PC122 x 0.6
Min. Size: 8x8
[203.2mm x 203.2mm]
*See Notes for
Ordering Information*




Style: 3232R

PC: 222
Frame: PC122 x 0.6
Min. Size: 8x8
[203.2mm x 203.2mm]
*See Notes for
Ordering Information*




Style: 3284L

PC: 222
Frame: PC122 x 0.6
Min. Size: 8x8
[203.2mm x 203.2mm]
*See Notes for
Ordering Information*




Style: 3284R

PC: 222
Frame: PC122 x 0.6
Min. Size: 8x8
[203.2mm x 203.2mm]
*See Notes for
Ordering Information*




Style: 2632L

PC: 239
Frame: PC139 x 0.6
Min. Size: 9 1/4 x 9 1/4
[247.7mm x 247.7mm]
*See Notes for
Ordering Information*




Style: 2632R

PC: 239
Frame: PC139 x 0.6
Min. Size: 9 1/4 x 9 1/4
[247.7mm x 247.7mm]
*See Notes for
Ordering Information*

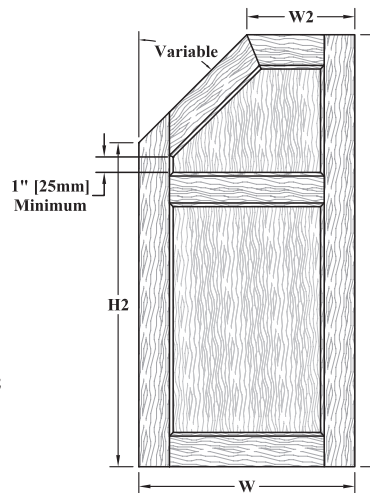

Style: 3289L

PC: 240
Frame: PC140 x 0.6
Min. Size: 9 1/4 x 13 1/4
[247.7mm x 349.3mm]
*See Notes for
Ordering Information*

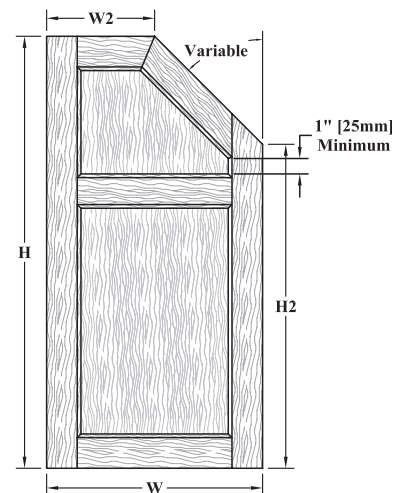

Style: 3289R


PC: 240
Frame: PC140 x 0.6
Min. Size: 9 1/4 x 13 1/4
[247.7mm x 349.3mm]
*See Notes for
Ordering Information*

► For PRICING ► See Section B.3 in our current Wholesale Pricing Catalog.

Cabinet Door & Drawer Front Options

Traditional Mortise & Tenon - 1/4" Flat Panel

B



Style: 3021L


PC: 225

Frame: PC125 x 0.6

Min. Size: 7x9 3/4

[177.8mm x 247.7mm]

See Notes for Ordering Information



Style: 3021R


PC: 225

Frame: PC125 x 0.6

Min. Size: 7x9 3/4

[177.8mm x 247.7mm]

See Notes for Ordering Information



Style: 3057L


PC: 225

Frame: PC125 x 0.6

Min. Size: 10 1/2 x 10 1/2

[266.7mm x 266.7mm]

See Notes for Ordering Information



Style: 3057R


PC: 225

Frame: PC125 x 0.6

Min. Size: 10 1/2 x 10 1/2

[266.7mm x 266.7mm]

See Notes for Ordering Information




Style: 40*
Drawer Front

PC: 201

Frame: PC101 x 0.6

Min. Size: 6 5/8 x 6

[168.3mm x 152.4mm]




Style: 4040*
Drawer Front

PC: 203

Frame: PC103 x 0.6

Min. Size: 9 3/4 x 6 5/8

[247.7mm x 168.3mm]




Style: 1026*
Drawer Front

PC: 118

Frame: NA

Min. Size: 6 5/8 x 3

[168.3mm x 76.2mm]




Style: 1400*
Drawer Front

PC: 218

Frame: PC118 x 0.6

Min. Size: 6 5/8 x 6

[168.3mm x 152.4mm]



Style: 1401*
Drawer Front

PC: 201

Frame: PC101 x 0.6

Min. Size: 6 x 6 5/8

[152.4mm x 168.3mm]

► For PRICING ► See Section [B.3](#) in our current Wholesale Pricing Catalog.

B.3.9

V19.1



WalzCraft.com




(Phone) 1-800-237-1326

6:00AM - 5:30PM CST

(24 Hour Fax) 1-608-781-3667

Ordering & Pricing Notes: "Traditional" Mortise & Tenon - 1/4" Flat Panel Doors and Drawer Fronts

Ordering Guidelines

1	Order Forms	Please use Door and/or Drawer Front Order Forms (E•Z Forms #2 and #3) .
		When placing an order for a 1/4" Flat Panel door, please indicate the word “Flat” in the space provided for the panel profile on the order form. Profile Info Stile & Rail or Miter Profile Panel Profile Outside Edge Profile SR107 Flat D17 
Pricing		
1	Pricing	Please see Section B.3 of our current Wholesale Pricing Catalog .

Technical Notes: "Traditional" Mortise & Tenon - 1/4" Flat Panel Doors and Drawer Fronts

Cabinet Door & Drawer Front Options (Chapter B)

1	1/4" Flat Panel Doors and Drawers Fronts	1/4" Flat Panel doors are available with 1/4" veneered or raw MDF center panels. To simulate the "look" of a "Flat Panel" door or drawer front, in a solid wood species, please order using a solid wood raised panel door style with the RVSCP-PR324 center panel profile. See Section B.1 for Raised Panel Door & Drawer Front Styles and Section E.13 for the RVSCP-PR324 center panel profile. For pricing, please see Section B.1 of our current Wholesale Pricing Catalog.
2	Frame and Mullion Doors	Glass openings are routed to follow the contour of the shape for Styles 2012L, 2012R, 2072L, 2072R, 2413, 2414, 2415, 2417, 2419, 2499L, 2499R, 2502L, 2502R, 2562L, 2562R, 2632L, 2632R, 2829, 2929, 3021L, 3021R, 3057L, 3057R, 3100L, 3100R, 3131L, 3131R, 3156, 3187, 3231L, 3231R, 3232L, 3232R, 3234, 3235, 3284L, 3284R, 3287 (Center rail only), 3289L, 3289R, 4010, 4060, 4070, 4080, 4090 . For pricing, please see Section B.12 of our current Wholesale Pricing Catalog .
3	Style 1026*	Only available as a drawer front. Only available in solid wood and raw MDF (not available in a hybrid species). Maximum height is 12" [304.8mm]. Heights up to 6" [152.4mm] will be constructed without glue-ups whenever possible. Available with the SR100 stile & rail profile from Section E.1 or any Mirror Joint stile & rail profile from Section E.2. When paired with any stile & rail door (ex: Style 10, Style 40, etc.), the door must utilize the same stile & rail profile and have the same width stiles as the 1026* drawer front.
4	Style 2413, 2414, 2415	The width of the stiles and rails is fixed at 2 1/4" [57.2mm] (at the narrowest point). Radius is fixed at 1 3/4" [44.5mm]. Please submit requests for all other dimensions to our Customer Support Team. Additional charges will apply.
5	Style 2632L, 2632R	Please provide overall width (W) and height (H), as well as the secondary width (W2) at the top of door and the secondary height (H2) at the side of the door. Angle will vary as dimensions vary. A CAD drawing must be approved prior to manufacturing the product.
6	Style 2929	Overall width of door and stile & rail width will determine size of interior diamond. Sides of interior diamond will remain equal in length to one another. Angles are fixed at 45°. A CAD drawing must be approved prior to manufacturing the product.
7	Style 3021L & 3021R	Minimum radius = 2" [50.8mm]. The radius will equal 90 degrees of an arc on the outside edge. The horizontal dimension of the curved stile (as shown in the illustration) equals the radius. <i>These door style illustrations depict a 14" x 18" [355.6mm x 457.2mm] door with a curved stile radius of 5" [127mm].</i> The vertical dimension of the curved stile (as shown in the illustration) equals the radius plus the width of the top rail. <i>Based on the 14" x 18" [355.6mm x 457.2mm] door size illustrated along with the 5" [127mm] radius, this dimension would be 7 1/4" [184.2mm].</i> When ordering, please provide the overall width and height of the door and note the horizontal dimension (radius) in the Special Instructions column on the order form. A CAD drawing must be approved prior to manufacturing the product.

Continued on next page...

► For PRICING ► See Section **B.3** in our current Wholesale Pricing Catalog.

Technical Notes: "Traditional" Mortise & Tenon - ¼" Flat Panel Doors and Drawer Fronts ...continued

Cabinet Door & Drawer Front Options (Chapter B)...continued

8	Style 3057L & 3057R	Minimum radius = 2" [50.8mm]. The radius will equal 90 degrees of an arc on the outside edge.
		The horizontal dimension of the curved rail (as shown in the illustration) equals the radius. <i>These door style illustrations depict a 14" x 18" [355.6mm x 457.2mm] door with a curved stile radius of 5" [127mm].</i>
		The vertical dimension of the curved rail (as shown in the illustration) equals the radius. <i>These door style illustrations depict a 14" x 18" [355.6mm x 457.2mm] door with a curved stile radius of 5" [127mm].</i>
		When ordering, please provide us with the overall width and height of the door and note the horizontal dimension (radius) in the Special Instructions column on the order form.
		A CAD drawing must be approved prior to manufacturing the product.
9	Style 3156	Width cannot be greater than the height. • Minimum visual opening width for center circle is 7¼" [184.2mm].
		Minimum height must be 2 times the width minus 4" [101.6mm].
		Available with all "Traditional" and Old World "Traditional" Stile and Rail profiles.
		When ordered in a rustic grade, the center rail/circle will not have large knots. It may contain small knots or possibly, no knots at all. WalzCraft will try to maintain a rustic grade look utilizing other characteristics. See Section S.1 for more information on rustic grades.
		A CAD drawing must be approved prior to manufacturing the product.
10	Style 3231L, 3231R	Please provide overall width (W) and height (H).
		Angles will vary as dimensions vary.
		A CAD drawing must be approved prior to manufacturing the product.
11	Style 3232L, 3232R, & 3234	Please provide overall width (W) and height (H), as well as the secondary width (W2) at the top of door.
		Angles will vary as dimensions vary.
		A CAD drawing must be approved prior to manufacturing the product.
12	Style 3235	Please provide overall width (W) and height (H), as well as the secondary width (W2) at the top of door.
		Angles will vary as dimensions vary.
		Center stile will be centered on width (50/50 split), unless otherwise noted.
		A CAD drawing must be approved prior to manufacturing the product.
13	Style 3284L, 3284R	Please provide overall width (W) and height (H), as well as the secondary height (H2) along the side of door.
		Angles will vary as dimensions vary.
		A CAD drawing must be approved prior to manufacturing the product.
14	Style 3289L, 3289R	Please provide overall width (W) and height (H), as well as the secondary width (W2) at the top of door and the secondary height (H2) at the side of the door.
		Angle will vary as dimensions vary.
		Center rail is shown at its highest point, which is also its standard placement, unless otherwise noted.
		A CAD drawing must be approved prior to manufacturing the product.
15	Style 3139, 4050 & 4055	If ordered below 10½ [266.7mm] wide, the corner blocks will be reduced to accommodate the width, based on 2¼" [57.2mm] stiles & rails.
		Can only be ordered with the SR100 stile and rail profile.
		Not available with the RVSCP-PR324 reverse solid center panel profile.

Convex/Concave Options (Chapter D)

1	Available Products	The ☐ indicates door styles that are available Convex/Concave (curved). See Chapter D for more information.
2	Raw MDF	Traditional mortise & tenon doors and drawer fronts made from MDF or MDF-MR are not available convex/concave.

Continued on next page...

► For PRICING ► See Section [B.3](#) in our current Wholesale Pricing Catalog.

Technical Notes: "Traditional" Mortise & Tenon - 1/4" Flat Panel Doors and Drawer Fronts ...continued

Finish Options (Chapter R)


1	Raw MDF	See Finishing Methods (<i>Section R.2</i>) for information on MDF or MDF-MR with Primed Only for Paint or SolidTone® Colors. Traditional mortise & tenon doors and drawer fronts made from MDF or MDF-MR are not available with 3D Laminate.
---	---------	---

Functional Options (Chapter F)

1	Hinge Boring	Hinge boring is available for all "Traditional" Mortise & Tenon - 1/4" Flat Panel doors and drawer fronts. Please see <i>Section F.1</i> for additional hinge boring requirements, ordering instructions and compatibility.
---	--------------	---

General Information (Chapter A)

1	Grain Direction	Arrows (↔) shown throughout the catalog indicate standard grain direction. Grain direction may be specified at NO additional cost. <i>Corner blocks</i> on all applicable door styles (ex: Style 4080) will have a standard <i>horizontal</i> grain direction.
2	Ready to Assemble (RTA)	RTA is available as an option.
3	Center Rail Placement	Custom center rail placement may be specified and refers to the distance from the top of the top rail to the top of the center rail for most door styles (<i>see below for exceptions</i>). Styles 2417, 2929, 3156, 3171, 3434, 3456: For custom rail placement, measure from the top of the door to the center of the center rail. Styles 2562L, 2562R: For custom rail placement, measure from the top of the door to the center of the center rail at its highest point. Style 3287: For custom rail placement, measure from the top of the door to the bottom of the center rail at its lowest point. See Center Rail Placement in <i>Section A.4</i> for more information.
4	Stile & Rail Dimensions	Standard stile and rail dimensions are 2 1/4" [57.2mm] wide. Non-standard part sizes may be ordered, however, additional up-charges may apply. See <i>Section A.5</i> for more information.



Material Options

1	Core Material	Veneered flat panel doors are constructed using a 1/4" [6.4mm] "A" face grade veneer with an MDF core.
2	Materials Available	Available in all of the species/grades noted in <i>Section B.3</i> of our current Wholesale Pricing Catalog . • See individual door style notes for exceptions.
3	Door Style 3156 Hybrid/MDF	When ordering door style 3156 in Hybrid/MDF (solid wood stiles & rails with raw MDF center panel), the center rail / circle will be made from raw MDF for SolidTone® or Primed Only for Paint applications.

Molding Options (Chapter N)

1	Applied Moldings on MDF	When an applied molding is added to an MDF product, the molding will be made from Maple-Hard/Soft Mixed-Value / Budget/Paint Grade.
---	-------------------------	--

Continued on next page...

► For PRICING ► See *Section B.3* in our current Wholesale Pricing Catalog.

Technical Notes: "Traditional" Mortise & Tenon - ¼" Flat Panel Doors and Drawer Fronts ...continued**Profile Options (Chapter E)**

1	Door Styles 31, 2435, 2827	When adding an applied molding to the stiles and rails of these door styles, the molding for the arched rails will be made from two pieces, so as to have a miter joint at the peak of the arch.
----------	-----------------------------------	--

Sizes/Dimensions


1	Minimum W x H	Use the dimensions noted below the image of your chosen door style on the preceding pages.
2	Thicknesses	When using Traditional stile and rail profiles, Traditional Mortise & Tenon ¼" flat panel doors and DFs made from solid wood are available ¾" [19.3mm] and 1" [25.4mm] thick. When using Old World stile and rail profiles, Traditional Mortise & Tenon ¼" flat panel doors and DFs made from solid wood are available 1" [25.4mm], 1⅝" [28.6mm] and 1¼" [31.8mm] thick. See Section S.3 for possible thickness restrictions based on wood species. Traditional mortise & tenon raised panel doors and DFs made from raw MDF are available ¾" [19.1mm] and 1" [25.4mm] thick. Traditional mortise & tenon raised panel doors and DFs made from raw MDF-MR are only available ¾" [19.1mm] thick. Old World mortise & tenon raised panel doors and DFs made from raw MDF are only available 1" [25.4mm] thick.
3	MDF Maximum Size	The maximum size for a Traditional mortise & tenon door made from raw MDF or MDF-MR will be 48" x 96" [1219.2mm x 2438.4mm] or 96" x 48" [2438.4mm x 1219.2mm].
4	Maximum Center Panel Size Limitation	Given the ¼" [6.4mm] veneered flat panel material used for center panels is 48"W x 96"H [1219.2mm x 2438.4mm], the maximum visible center panel width in a door with vertical grain and no center stile is 47⅞" [1197mm]; the maximum visible center panel height with no center rail is 95⅞" [2416.2mm].
5	Maximum Width for Doors with Shaped Rails	The maximum width for a WalzCraft standard door with a shaped rail or rails is 30" [762.0mm] - (based on 2¼" [57.2mm] wide stiles). • Please submit requests for doors with shaped rails over 30" wide to our Customer Support Team, as additional charges may apply. • This does not include doors made with corner blocks (Price Classes 207, 211, 214, 221, 224, 228, 229).

Traditional Mortise & Tenon ¼" Flat Panel Doors and Drawer Fronts - END

► For PRICING ► See Section **B.3** in our current Wholesale Pricing Catalog.


Quarter Circle Doors - 1/4" Flat Panel

B

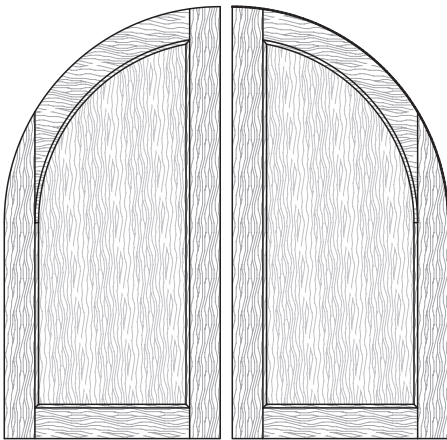


Style: 895L

PC: 952
Frame: PC906 x 0.6
Min. Size: 8x10 1/4
[203.2mm x 260.4mm]
Outside Radius

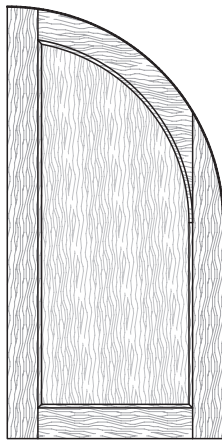


Style: 895R

PC: 952
Frame: PC906 x 0.6
Min. Size: 8x10 1/4
[203.2mm x 260.4mm]
Outside Radius

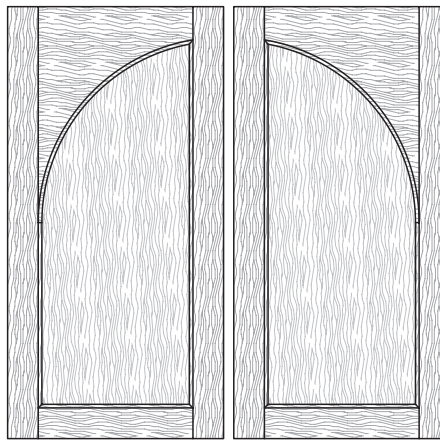


Style: 896L

PC: 951
Frame: PC905 x 0.6
Min. Size: 8x10 1/4
[203.2mm x 260.4mm]
Outside Radius

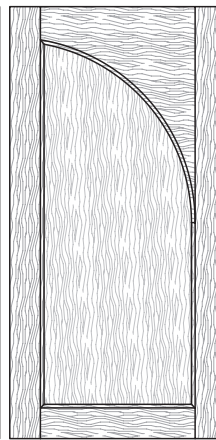

Style: 896R

PC: 951
Frame: PC905 x 0.6
Min. Size: 8x10 1/4
[203.2mm x 260.4mm]
Outside Radius

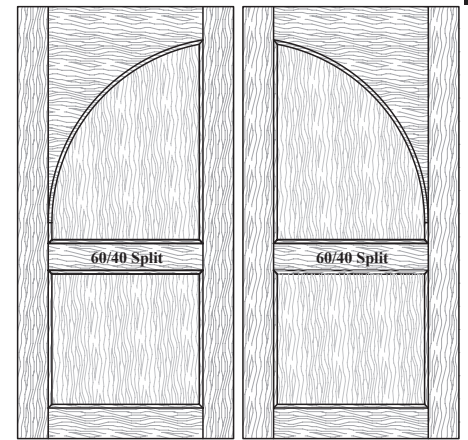

Style: 2432L


PC: 953
Frame: PC907 x 0.6
Min. Size: 8x16 1/4
[203.2mm x 412.8mm]
Outside Radius

Style: 2432R

PC: 953
Frame: PC907 x 0.6
Min. Size: 8x16 1/4
[230.2mm x 412.8mm]
Outside Radius

Quarter Circle Radius Explanation
The difference between Outside & Inside Radius


All **Outside Radius** doors feature a radius that is measured from the **outside edge** of the door stile.

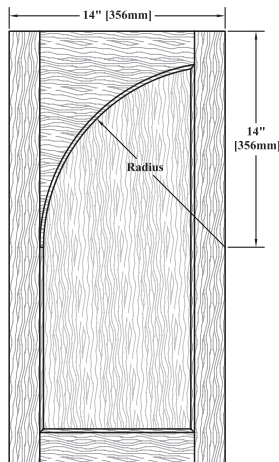

To Calculate Radius Center Point:


From door width,
Measure down from the top of the door and mark the radius center point on the outside edge of the stile.

All **Inside Radius** doors feature a radius that is measured from the **inside edge** of the door stile.

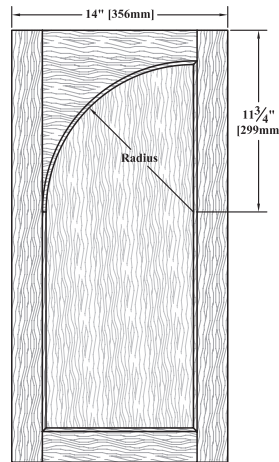

To Calculate Radius Center Point:

Door width minus the Stile Width: 2 1/4" [57.2mm],
Measure down from the top of the door and mark the radius center point on the inside edge of the stile.

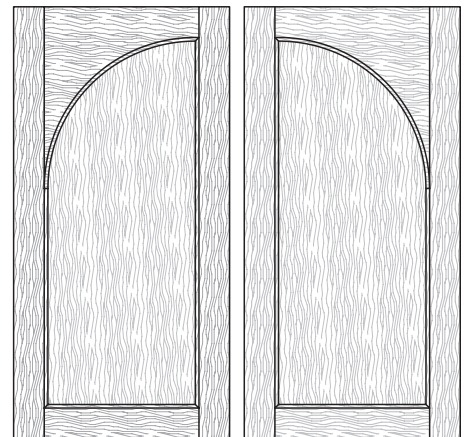

Style: 897L


PC: 951
Frame: PC905 x 0.6
Min. Size: 8x8
[203.2mm x 203.2mm]
Inside Radius

Style: 897R

PC: 951
Frame: PC905 x 0.6
Min. Size: 8x8
[203.2mm x 203.2mm]
Inside Radius


► For PRICING ► See Section B.4 in our current Wholesale Pricing Catalog.

Half Circle Doors - 1/4" Flat Panel




Style: 1890

PC: 952
Frame: PC906 x 0.6
Min. Size: 9x6 1/4
[228.6mm x 171.5mm]




Style: 1896

PC: 951
Frame: PC905 x 0.6
Min. Size: 9x6 1/4
[228.6mm x 171.5mm]




Style: 3020

PC: 952
Frame: PC906 x 0.6
Min. Size: 12x12
[304.8mm x 304.8mm]




Style: 3022

PC: 951
Frame: PC905 x 0.6
Min. Size: 12x12
[304.8mm x 304.8mm]

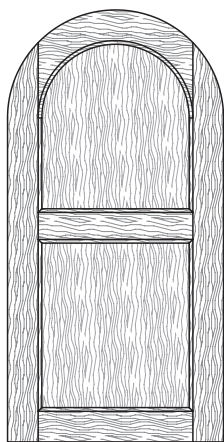


Style: 2961

PC: 955
Frame: PC909 x 0.6
Min. Size: 9x13
[228.6mm x 330.2mm]

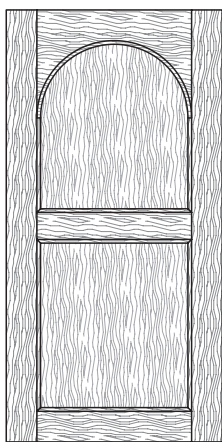


Style: 2963

PC: 954
Frame: PC908 x 0.6
Min. Size: 9x13
[228.6mm x 330.2mm]

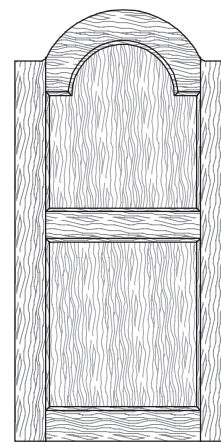

Style: 2965

PC: 955
Frame: PC909 x 0.6
Min. Size: 12x17
[304.8mm x 431.8mm]

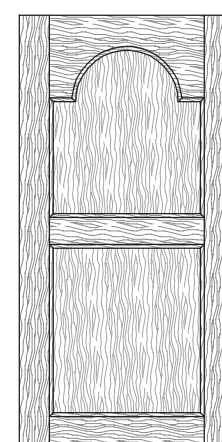

Style: 2967

PC: 954
Frame: PC908 x 0.6
Min. Size: 12x17
[304.8mm x 431.8mm]

Ordering & Pricing Notes: Quarter Circle & Half Circle Doors - 1/4" Flat Panel

Ordering Guidelines

1 Order Forms

Please use **Door Order Form (E-Z Form #2)**.

When placing an order for a 1/4" Flat Panel door, please indicate the word "Flat" in the space provided for the panel profile on the order form.

Profile Info

Stile & Rail or Miter Profile	SR107
Panel Profile	Flat
Outside Edge Profile	D17



Pricing

1 Pricing

Please see **Section B.4** of our current Wholesale Pricing Catalog.

Continued on next page...

► For PRICING ► See Section B.4 in our current Wholesale Pricing Catalog.

Technical Notes: Quarter Circle & Half Circle Doors - 1/4" Flat Panel**Cabinet Door & Drawer Front Options (Chapter B)**

1	Frame & Mullion Doors	Glass openings are routed to follow the contour of the shape for Styles 895L, 895R, 896L, 896R, 897L, 897R, 1890, 1896, 2432L, 2432R, 2961, 2963, 2965, 2967, 3020, 3022. For pricing, please see <i>Section B.12</i> of our current Wholesale Pricing Catalog .
2	Radius Explanation	See beginning of this section (<i>B.4</i>) for an explanation of Inside and Outside radius door measurements.
3	Styles 3022, 2967	Available with all "Traditional" and Old World "Traditional" Stile and Rail profiles.
		Available with all Outside Edge Profiles.
		A CAD drawing must be approved prior to manufacturing the product.
4	Style 3020, 2965	Available with all "Traditional" and Old World "Traditional" Stile and Rail profiles.
		Only available with the following Outside Edge Profiles: D7, D12, D15, D17, D18, D21, D24, D32, D41, D52, D67, D93, D101, D102, D115, D118, D120.
		A CAD drawing must be approved prior to manufacturing the product.
5	Center Rail Placement	Center rail placement must be specified and refers to the distance from the top of the top rail to the top of the center rail for most door styles. See Center Rail Placement in <i>Section A.4</i> for more information.

Functional Options (Chapter F)

1	Hinge Boring	Hinge boring is available for all Quarter & Half Circle - 1/4" Flat Panel doors. Please see <i>Section F.1</i> for additional hinge boring requirements, ordering instructions and compatibility.
---	--------------	---

General Information (Chapter A)

1	Ready to Assemble (RTA)	RTA is <i>not</i> available as an option.
---	-------------------------	---

Material Options

1	Core Material	Veneered flat panel doors are constructed using a 1/4" [6.4mm] "A" face grade veneer with an MDF core.
---	---------------	---

Profile Options (Chapter E)

1	Stile & Rail Profile Options	Compatible with all "Traditional" and "Old World" stile and rail profiles (excluding Mirror Joints).
2	1/4" Flat Panel Doors and Drawers Fronts	To simulate the "look" of a "Flat Panel" door or drawer front, in a solid wood species, please order using a solid wood raised panel door style with the RVSCP-PR324 center panel profile. See <i>Section B.2</i> for Raised Panel Door & Drawer Front Styles and <i>Section E.13</i> for the RVSCP-PR324 center panel profile. For pricing, please see <i>Section B.2</i> of our current Wholesale Pricing Catalog .


Sizes/Dimensions

1	Door Widths	Styles 895L/R, 896L/R, 897L/R, 1890, 1896, 2432L/R, 2961 and 2963 widths can only be ordered in 1/4" [6.4mm] increments.
		Styles 3020, 3022, 2965 and 2967 are available from 12" [304.8mm] to 24" [609.6mm] wide in 1" [25.4mm] increments only.
2	Outside Radius	Style 895L, 895R, 896L, 896R: The height must be at least 2 1/4" [57.2mm] greater than the width. Style 2432L, 2432R: The height must be at least two times the width of the door.
3	Inside Radius	Height must be equal to or greater than the width.
4	Half Circle Doors	Width must be less than or equal to the door height, less the width of the (bottom rail x 2).
		Height must be greater than or equal to 1/2 of the door width, plus the width of the bottom rail and center rail (if applicable).
5	Stile & Rail Sizes	- Traditional Quarter and Half Circle doors will have stile/rail width fixed at 2 1/4" [57.2mm] wide. - Old World Quarter and Half Circle doors will have stile/rail width fixed at 3" [76.2mm] wide. - Please submit requests for other widths to our Customer Support Team as additional charges may apply.
6	Thicknesses	When using Traditional stile and rail profiles, Quarter Circle and Half Circle 1/4" flat panel doors made from solid wood are available 3/4" [19.3mm] and 1" [25.4mm] thick.
		When using Old World stile and rail profiles, Quarter Circle and Half Circle 1/4" flat panel doors made from solid wood are available 1" [25.4mm], 1 1/8" [28.6mm] and 1 1/4" [31.8mm] thick.
		See <i>Section S.3</i> for possible thickness restrictions based on wood species.

Quarter & Half Circle 1/4" Flat Panel Doors - END


► For PRICING ► See Section B.4 in our current Wholesale Pricing Catalog.

Gothic Doors - ¼" Flat Panel

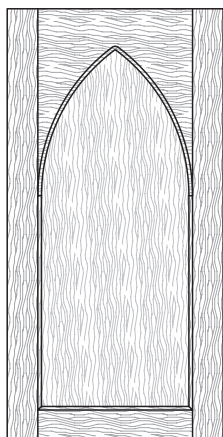

Style: 4100

PC: 951
 Frame: PC905 x 0.6
 Min. Size: 10x11
 [254mm x 279.4mm]

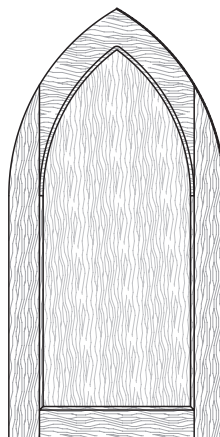

Style: 4200

PC: 952
 Frame: PC906 x 0.6
 Min. Size: 10x11
 [254mm x 279.4mm]

Ordering & Pricing Notes: Gothic Doors - ¼" Flat Panel

Ordering Guidelines

1	Order Forms	Please use Door Order Form (E•Z Form #2) .
---	-------------	---

Pricing

1	Pricing	Please see Section B.4 of our current Wholesale Pricing Catalog .
---	---------	---

Technical Notes: Gothic Doors - ¼" Flat Panel

Cabinet Door & Drawer Front Options (Chapter B)

1	Frame & Mullion Doors	Glass openings will be routed to follow the contour of the shape for Styles 4100 and 4200 . For pricing, please see Section B.12 of our current Wholesale Pricing Catalog .
---	-----------------------	---

Functional Options (Chapter F)

1	Hinge Boring	Hinge boring is available for all Gothic - ¼" Flat Panel doors. Please see Section F.1 for additional hinge boring requirements, ordering instructions and compatibility.
---	--------------	--

Profile Options (Chapter E)

1	Stile & Rail Profile Options	Compatible with all "Traditional" and "Old World" stile and rail profiles (excluding Mirror Joints). Mitered stile and rail profiles are not an option for Gothic doors.
2	¼" Flat Panel Doors and Drawers Fronts	To simulate the "look" of a "Flat Panel" door or drawer front, in a solid wood species, please order using a solid wood raised panel door style with the RVSCP-PR324 center panel profile . See Section B.1 for Raised Panel Door & Drawer Front Styles and Section E.13 for the RVSCP-PR324 center panel profile. For pricing, please see Section B.1 of our current Wholesale Pricing Catalog .

Sizes/Dimensions

1	Minimum Height	Minimum height equals door width plus 1" [25.4mm].
2	Absolute Minimum Width	The absolute minimum width for a flat panel Gothic door is 10" [254mm].
3	Top Rail Width	In order to maintain the "look" and shape of the Gothic arch, the width of the top rail at the peak of the arch will vary slightly from the width of the remaining stiles and rail. This dimension will also fluctuate based on the overall width of the door. If needing to specify this dimension, please submit your request to our Customer Support Team.
4	Thicknesses	When using Traditional stile and rail profiles, Gothic ¼" flat panel doors made from solid wood are available ¾" [19.3mm] and 1" [25.4mm] thick. When using Old World stile and rail profiles, Gothic ¼" flat panel doors made from solid wood are available 1" [25.4mm], 1½" [28.6mm] and 1¾" [31.8mm] thick. See Section S.3 for possible thickness restrictions based on wood species.

Gothic ¼" Flat Panel Doors - END


► For PRICING ► See **Section B.4** in our current Wholesale Pricing Catalog.

[illegible]

Cabinet Door & Drawer Front Options


Mitered (Mitre) Mortise & Tenon - Raised Panel

B




Style: 10M

PC: 301
Frame: PC301 x 0.6
Min. Size: 8x8
[203.2mm x 203.2mm]




Style: 10M*
Drawer Front

PC: 301
Frame: PC301 x 0.6
Min. Size: 8x8
[203.2mm x 203.2mm]
Shown with 2 1/4" [57.2mm] stiles & rails




Style: 1010M

PC: 303
Frame: PC303 x 0.6
Min. Size: 13 3/4 x 8
[349.3mm x 203.2mm]



Style: 8010M

PC: 331
Frame: PC331 x 0.6
Min. Size: 13 3/4 x 15
[349.3mm x 381mm]



Style: 8160M

PC: 315
Frame: PC315 x 0.6
Min. Size: 13 3/4 x 13 3/4
[349.3mm x 349.3mm]




Style: 8000M

PC: 303
Frame: PC303 x 0.6
Min. Size: 8x13 3/4
[203.2mm x 349.3mm]



Style: 1000M

PC: 303
Frame: PC303 x 0.6
Min. Size: 8x15 1/2
[203.2mm x 393.7mm]



Style: 1941M

PC: 303
Frame: PC303 x 0.6
Min. Size: 8x16 3/4
[203.2mm x 415.9mm]




Style: 8045M

PC: 303
Frame: PC303 x 0.6
Min. Size: 8x16 3/4
[203.2mm x 415.9mm]




Style: 2427M

PC: 331
Frame: PC331 x 0.6
Min. Size: 13 3/4 x 16 3/4
[349.3mm x 415.9mm]

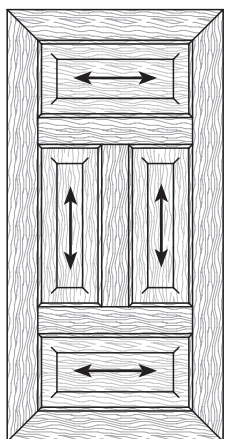


Style: 8050M

PC: 332
Frame: PC332 x 0.6
Min. Size: 13 3/4 x 23
[349.3mm x 584.2mm]

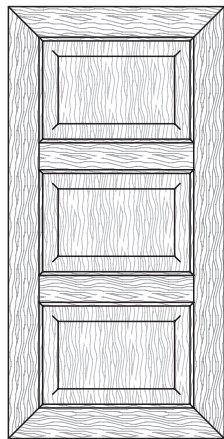


Style: 8030M

PC: 308
Frame: PC308 x 0.6
Min. Size: 8x19 1/2
[203.2mm x 495.3mm]




Style: 2271M

PC: 315
Frame: PC315 x 0.6
Min. Size: 8x25 3/4
[203.2mm x 641.4mm]



Style: 2272M

PC: 317
Frame: PC317 x 0.6
Min. Size: 8x31
[203.2mm x 787.4mm]

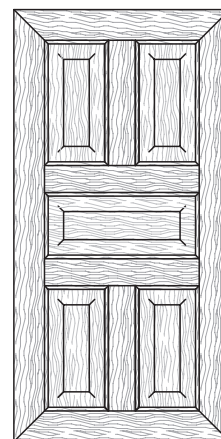

Style: 2465M

PC: 336
Frame: PC136 x 0.6
Min. Size: 13 3/4 x 25
[349.3mm x 635mm]

► For PRICING ► See Section B.5 in our current Wholesale Pricing Catalog.

B.5.1

V18.2



WalzCraft.com



(Phone) 1-800-237-1326


6:00AM - 5:30PM CST

(24 Hour Fax) 1-608-781-3667

Mitered (Mitre) Mortise & Tenon - Raised Panel

Cabinet Door & Drawer Front Options

B



40/60 Split


Style: 8170M

PC: 315

Frame: PC315 x 0.6

Min. Size: 13³/₄x15¹/₂

[349.3mm x 393.7mm]




Style: 8060LM

PC: 332

Frame: PC332 x 0.6

Min. Size: 13³/₄x15¹/₂

[349.3mm x 393.7mm]




Style: 8060RM

PC: 332

Frame: PC332 x 0.6

Min. Size: 13³/₄x15¹/₂

[349.3mm x 393.7mm]

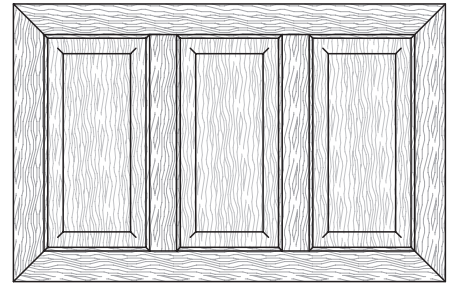


Style: 8020M

PC: 308

Frame: PC308 x 0.6

Min. Size: 19¹/₂x8

[495.3mm x 203.2mm]



50/50 Split


Style: 2291LM

PC: 331

Frame: PC331 x 0.6

Min. Size: 13³/₄x13³/₄

[349.3mm x 349.3mm]



50/50 Split

Style: 2291RM

PC: 331

Frame: PC331 x 0.6

Min. Size: 13³/₄x13³/₄

[349.3mm x 349.3mm]

► For PRICING ► See Section **B.5** in our current Wholesale Pricing Catalog.

Ordering & Pricing Notes: Mitered Mortise & Tenon - Raised Panel

Ordering Guidelines

1	Order Forms	Please use <i>Door and/or Drawer Front Order Forms (E•Z Forms #2 and #3)</i> .
2	Compatibility Charts	For more information regarding the compatibility of miter stile & rail profiles with other WalzCraft products and services, please reference our website under: Resources > Technical Information .
Pricing		
1	Pricing	Please see <i>Section B.5</i> of our current Wholesale Pricing Catalog .

Technical Notes: Mitered Mortise & Tenon - Raised Panel

Cabinet Door & Drawer Front Options (Chapter B)

1	Mitered Frame or Mullion Doors	All of the mitered profiles shown in this catalog are also available with the GRF profile. When ordering, please indicate whether the door is a frame or mullion. If a mullion, please indicate the lite pattern and number of lites. <i>Not all mitered profiles are available with mullions.</i>
---	--------------------------------	--

Convex/Concave Options (Chapter D)

1	Curved Products	The  indicates door styles are available for Curved Products. For ordering guidelines, see <i>Chapter D</i> .
---	-----------------	--

Design Options (Chapter G)

1	Radius Corners	Mitered profiles in the MP600/MP6000 Series , which accept an additional outside edge, may also accept radius outside corners. 1½" [38.1mm] wide Mitered Profiles can accept up to a ¾" [19.1mm] radius. 2¼" [57.2mm] to 4½" [114.3mm] wide Mitered Profiles can accept up to a 1" [25.4mm] radius. For more information, please refer to <i>Section G.13</i> .
2	Mitered Stile & Rail Stock (Part #SRP100)	Mitered stile & rail stock is produced and priced the same as Traditional stile & rail stock. To order, use part # SRP100 . Available in 8', Random Length and Cut to Length sizes. See <i>Section G.16</i> for additional information.

Functional Options (Chapter F)

1	Hinge Boring	Hinge boring is available for Mitered Mortise & Tenon - Raised Panel doors and drawer fronts. Please see <i>Section F.1</i> for additional hinge boring requirements, ordering instructions and compatibility. Hinge boring is <i>not available</i> on any of the 1½" [38.1mm] wide miter profiles.
---	--------------	---

General Information (Chapter A)

1	Grain Direction	Arrows (←→) indicate standard grain direction. Grain direction may be specified at NO extra cost .
2	Ready to Assemble	RTA (<i>Ready to Assemble</i>) is available as an option for mitered doors.
3	Warranty	Miter doors and drawer fronts will carry no warranty against bowing (barrel effect). • Please see <i>Section A.8 - Warranties</i> for more information on warping, bowing (barrel effect) and twisting.

Miscellaneous

1	Center Stile and Rail Construction	Most center stiles & rails will be haunched into the outside stiles & rails creating a mitered joint where they are conjoined. Exceptions will apply where the haunch distance is too small to miter. In these cases, a butt joint will be used (eg.: MP612/MP1468).
---	------------------------------------	--

Profile Options (Chapter E)

1	D7 Edges	A D7 Edge can be used along with any MP600/MP6000 Series mitered profile that accepts an additional outside edge.
2	Lipped Outside Edge Profiles	D5, D16, D20, D22, D36, D44, D58, D123, D144, D180 outside edges profiles are not available with any mitered construction. These edge treatments will leave a void in the tenon joint on profiles.
3	MP660 Family	Designed to accept applied molding # 3149 . Molding must be ordered separately.
4	MP744, MP763 Families	Designed to accept applied molding # 3253 . Molding must be ordered separately.

Continued on next page...

► For **PRICING** ► See *Section B.5* in our current Wholesale Pricing Catalog.

Technical Notes: Mitered Mortise & Tenon - Raised Panel...continued

Sizes /Dimensions

1	Thicknesses	When using Traditional mitered stile and rail profiles, mitered mortise & tenon raised panel doors and DFs made from solid wood are available ¾" [19.1mm] and 1" [25.4mm] thick.
		When using Old World mitered stile and rail profiles, mitered mortise & tenon raised panel doors and DFs made from solid wood are available 1" [25.4mm], 1⅝" [28.6mm] and 1¼" [31.8mm] thick.
		See Section S.3 for possible thickness restrictions based on wood species.
2	Non-Standard Parts	Some mitered profiles accommodate width flexibility, see the MP600/MP6000 series of mitered profiles in Section E.9 . The top rail, bottom rail, left stile and right stile must all be the same profile and the same width.
		Stiles/Rails can be ordered in widths from 1½" [38.1mm] to 3" [76.2mm] in ¼" [6.4mm] increments without incurring a non-standard part size charge. See Section A.5 for more information.
		Please submit requests for widths that range from over 3" [76.2mm] to a maximum 4½" [114.3mm] to our Customer Support Team; these may be subject to up-charges.
3	Minimum Sizes	All mitered door and drawer front minimum sizes are calculated based on 2¼" [57.2mm] wide profiles.
		If using a 3" [76.2mm] wide profile, please add 1½" [38.1mm] to the published minimum door size.
		If using a 1½" [38.1mm] wide profile, deduct 1½" [38.1mm] from the published minimum size.


Mitered Mortise & Tenon - Raised Panel - END

► For PRICING ► See Section [B.5](#) in our current Wholesale Pricing Catalog.

Cabinet Door & Drawer Front Options


Mitered (Mitre) Mortise & Tenon - 1/4" Flat Panel

B




Style: 40M

PC: 401
Frame: PC301 x 0.6
Min. Size: 6x6
[152.4mm x 152.4mm]




Style: 40M*
Drawer Front

PC: 401
Frame: PC301 x 0.6
Min. Size: 6x6
[152.4mm x 152.4mm]
Shown with 2 1/4" [57.2mm] stiles & rails




Style: 4040M

PC: 403
Frame: PC303 x 0.6
Min. Size: 9 3/4 x 6 5/8
[247.7mm x 168.3mm]




Style: 3010M

PC: 431
Frame: PC331 x 0.6
Min. Size: 9 3/4 x 12
[247.7mm x 304.8mm]



Style: 3160M

PC: 415
Frame: PC315 x 0.6
Min. Size: 9 3/4 x 11
[247.7mm x 279.4mm]

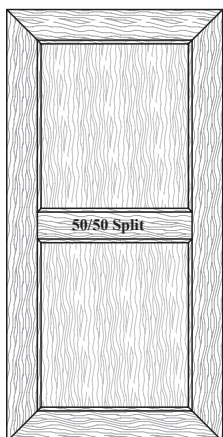


Style: 4044M

PC: 403
Frame: PC303 x 0.6
Min. Size: 6x11
[152.4mm x 279.4mm]



Style: 4043M

PC: 403
Frame: PC303 x 0.6
Min. Size: 6x12
[152.4mm x 304.8mm]

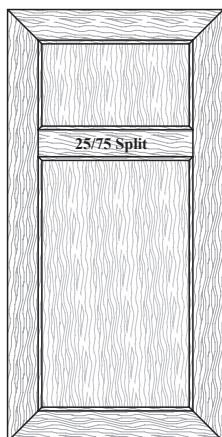

Style: 4041M

PC: 403
Frame: PC303 x 0.6
Min. Size: 6 5/8 x 12 3/4
[168.3mm x 323.9mm]




Style: 4045M

PC: 403
Frame: PC303 x 0.6
Min. Size: 6 5/8 x 12 3/4
[168.3mm x 323.9mm]




Style: 2428M

PC: 431
Frame: PC331 x 0.6
Min. Size: 9 3/4 x 12 3/4
[247.7mm x 323.9mm]

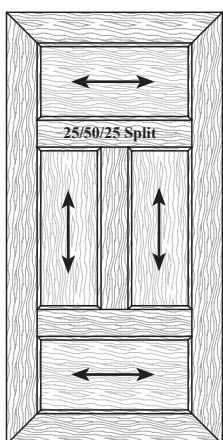


Style: 4150M

PC: 432
Frame: PC332 x 0.6
Min. Size: 9 3/4 x 15
[247.7mm x 381mm]

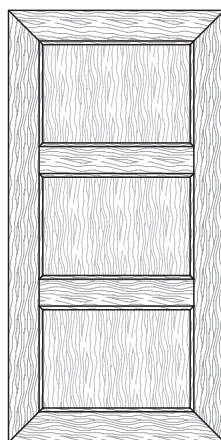


Style: 4030M

PC: 408
Frame: PC308 x 0.6
Min. Size: 6 5/8 x 15 1/4
[168.3mm x 390.5mm]

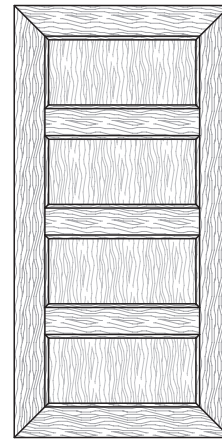


Style: 3271M

PC: 415
Frame: PC315 x 0.6
Min. Size: 6 5/8 x 19 3/4
[168.3mm x 501.7mm]

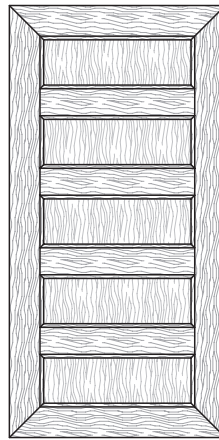

Style: 3272M

PC: 417
Frame: PC317 x 0.6
Min. Size: 6 5/8 x 24 1/4
[168.3mm x 612.8mm]

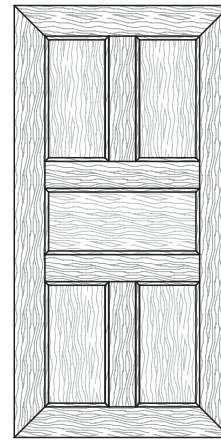

Style: 3465M

PC: 436
Frame: PC336 x 0.6
Min. Size: 9 3/4 x 16 1/2
[247.7mm x 419.1mm]

► For PRICING ► See Section B.6 in our current Wholesale Pricing Catalog.

B.6.1

V18.2



WalzCraft.com



(Phone) 1-800-237-1326


6:00AM - 5:30PM CST

(24 Hour Fax) 1-608-781-3667

Mitered (*Mitre*) Mortise & Tenon - 1/4" Flat Panel

Cabinet Door & Drawer Front Options

B



40/60 Split


Style: 3170M

PC: 415

Frame: PC315 x 0.6

Min. Size: 11x11½

[279.4mm x 292.1mm]



40/60 Split


Style: 3060LM

PC: 432

Frame: PC332 x 0.6

Min. Size: 11x11¼

[279.4mm x 285.8mm]



40/60 Split


Style: 3060RM

PC: 432

Frame: PC332 x 0.6

Min. Size: 11x11¼

[279.4mm x 285.8mm]

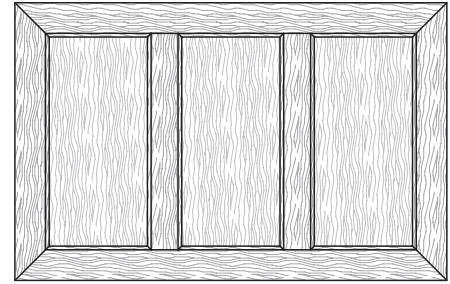


Style: 4020M

PC: 408

Frame: PC308 x 0.6

Min. Size: 15½x6¾

[390.5mm x 168.3mm]



50/50 Split


Style: 3291LM

PC: 431

Frame: PC331 x 0.6

Min. Size: 11x9¼

[279.4mm x 247.7mm]



50/50 Split

Style: 3291RM

PC: 431

Frame: PC331 x 0.6


Min. Size: 11x9¼

[279.4mm x 247.7mm]

► For PRICING ► See Section **B.6** in our current Wholesale Pricing Catalog.

Ordering & Pricing Notes: Mitered Mortise & Tenon - 1/4" Flat Panel

Ordering Guidelines

1	Order Forms	Please use Door and/or Drawer Front Order Forms (E•Z Forms #2 and #3) .
		When placing an order for a ¼" Flat Panel door, please indicate the word “Flat” in the space provided for the panel profile on the order form. Profile Info Stile & Rail or Miter Profile Panel Profile Outside Edge Profile MP609-57 Flat D17 
2	Compatibility Charts	For more information regarding the compatibility of miter stile & rail profiles with other WalzCraft products and services, please reference our website under: Resources > Technical Information .
Pricing		
1	Pricing	Please see Section B.3 of the current Wholesale Pricing Catalog .

Technical Notes: Mitered Mortise & Tenon - 1/4" Flat Panel

Cabinet Door & Drawer Front Options (Chapter B)

1	Mitered Frame or Mullion Doors	All of the mitered profiles shown in this catalog are also available with the GRF profile. • When ordering, please indicate whether the door is a frame or mullion. • If a mullion, please indicate the lite pattern and number of lites. • Not all mitered profiles are available with mullions.
---	--------------------------------	---

Convex/Concave Options (Chapter D)

1	Curved Products	The  indicates door styles are available for Curved Products. For ordering guidelines, see Chapter D .
---	-----------------	--

Design Options (Chapter G)

1	Radius Corners	Mitered profiles in the MP600/MP6000 series, which accept an additional outside edge, may also accept radius outside corners. • 1 1/2" [38.1mm] wide mitered profiles can accept up to a 3/4" [19.1mm] radius. • 2 1/4" [57.2mm] to 4 1/2" [114.3mm] wide mitered profiles can accept up to a 1" [25.4mm] radius. • For more information, please refer to Section G.13.
2	Mitered Stile & Rail Stock (Part #SRP100)	Mitered stile & rail stock is produced and priced the same as Traditional stile & rail stock with an outside edge. To order use part #SRP100. Available in 8' [2438.4mm], Random Length and Cut to Length sizes. See Section G.16 for additional information.

Functional Options (Chapter F)

1	Hinge Boring	Hinge boring is available for Mitered Mortise & Tenon - 1/4" Flat Panel doors and drawer fronts. Please see Section F.1 for additional hinge boring requirements, ordering instructions and compatibility. Hinge boring is not available on any of the 1 1/2" [38.1mm] wide miter profiles.
---	--------------	--

General Information (Chapter A)

1	Grain Direction	Arrows (↔) indicate standard grain direction. Grain direction may be specified at no additional cost.
2	Ready to Assemble	RTA is available as an option for mitered doors.
3	Warranty	Miter doors and drawer fronts will carry no warranty against bowing (barrel effect). • Please see Section A.8 - Warranties for more information on warping, bowing (barrel effect) and twisting.

Material Options

1	Core Material	Veneered flat panel doors are constructed using a 1/4" [6.4mm] "A" face grade veneer with MDF core.
---	---------------	--

Miscellaneous

1	Center Stile and Rail Construction	Most center stiles & rails will be haunched into the outside stiles & rails creating a mitered joint where they are conjoined. • Exceptions will apply where the haunch distance is too small to miter. In these cases, a butt joint will be used (eg.: MP612/MP1468).
---	------------------------------------	--

Continued on next page...

► For PRICING ► See **Section B.6** in our current Wholesale Pricing Catalog.

Technical Notes: Mitered Mortise & Tenon - ¼" Flat Panel...continued

Profile Options (Chapter E)...continued

1	¼" Flat Panel Doors and Drawers Fronts	¼" Flat Panel doors are available with ¼" veneered MDF core plywood or ¼" raw MDF center panels. If wanting the look of a flat panel door, but with a solid wood center panel, choose your door style from Section B.1 and select the RVSCP-PR324 reversed center panel profile from Section E.13 . • For pricing, please see Section B.1 of our current Wholesale Pricing Catalog .
2	D7 Edges	A D7 Edge can be used along with any MP600/MP6000 series mitered profile that accepts additional outside edges.
3	Lipped Outside Edge Profiles	D5, D16, D20, D22, D36, D44, D58, D123, D144, D180 outside edge profiles are not available with any mitered construction. • These edge treatments will leave a void in the tenon joint on profiles.
4	MP623-76, MP623-57, MP623-38	Only available in ¾" [19.1mm] thickness. To obtain a center panel that is flush with the face of the stiles and rails, use one of these Solid Wood Center Panel Profiles: PR318-25, PR319-10, PR320-25, PR320-32, PR320-44, PR321-32, PR328-32 or PR329-19 .
5	MP624-76, MP624-57 and MP624-38	Available in ¾" [19.1mm] or 1" [25.4mm] thicknesses with a ¼" [6.4mm] Veneered Flat Panel or these Solid Wood Profiles: PR318-25, PR320-25, PR320-32, PR320-44, PR321-32, PR328-32, PR329-19 or the RVSCP-PR324 (Reversed Solid Center Panel) .
6	MP660 Family	Designed to accept applied molding #1169 and #3149 . Molding must be ordered separately.
7	MP744, MP763 Families	Designed to accept applied molding #3253 . Molding must be ordered separately.

Sizes/Dimensions

1	Thicknesses	When using Traditional mitered stile and rail profiles, mitered mortise & tenon ¼" flat panel doors and DFs made from solid wood are available ¾" [19.1mm] and 1" [25.4mm] thick. When using Old World mitered stile and rail profiles, mitered mortise & tenon ¼" flat panel doors and DFs made from solid wood are available 1" [25.4mm], 1½" [28.6mm] and 1¾" [31.8mm] thick. See Section S.3 for possible thickness restrictions based on wood species.
2	Non-Standard Parts	Some mitered profiles accommodate width flexibility, see the MP600/MP6000 series of mitered profiles in Section E.9 . The top rail, bottom rail, left stile and right stile must all be the same profile and the same width. Stiles/Rails can be ordered in widths from 1½" [38.1mm] to 3" [76.2mm] in ¼" [6.4mm] increments without incurring a non-standard part size charge. See Section A.5 for more information. Please submit requests for widths that range from over 3" [76.2mm] to a maximum 4½" [114.3mm] to our Customer Support Team; these may be subject to up-charges.
3	Minimum Sizes	All mitered door and drawer front minimum sizes are calculated based on 2¼" [57.2mm] wide profiles. If using a 3" [76.2mm] wide profile, please add 1½" [38.1mm] to the published minimum door size. If using a 1½" [38.1mm] wide profile, deduct 1½" [38.1mm] from the published minimum size.
4	Maximum Center Panel Size Limitation	Given the ¼" [6.4mm] veneered flat panel material used for center panels is 48"W x 96"H [1219.2mm x 2438.4mm], the maximum visible center panel width in a door with vertical grain and no center stile is 47⅞" [1197mm]; the maximum visible center panel height with no center rail is 95⅞" [2416.2mm].

Mitered Mortise & Tenon - ¼" Flat Panel - END


► For PRICING ► See Section **B.6** in our current Wholesale Pricing Catalog.

French Miter Joinery Benefits


Our **French Miter** door construction was introduced in an effort to be a more cost effective alternative to an applied molding door. However, the **French Miter** door has other advantages as well. It provides more structural integrity than an applied molding door because the molding detail is an integral part of the stiles and rails instead of a separate piece. It provides a more traditional look than a formal mitered door while still having the applied molding look. If in extremely dry or humid regions, WalzCraft recommends the use of French Miter doors & drawer fronts. The door will be less likely to “barrel” than a traditional miter door (see **Warranty on Bowing** in **Section A.8** for more information on the “barrel effect”). There are more outside edge profile options available than with a mitered door, and you have the flexibility to vary your stile and rail widths.

Drawer Front Style 40FM*

Shown with: MP604-76, 3" [76mm] Wide Stiles;
MP604-57, 2¼" [57mm] Wide Rails
Flat Center Panel and D79 Outside Edge

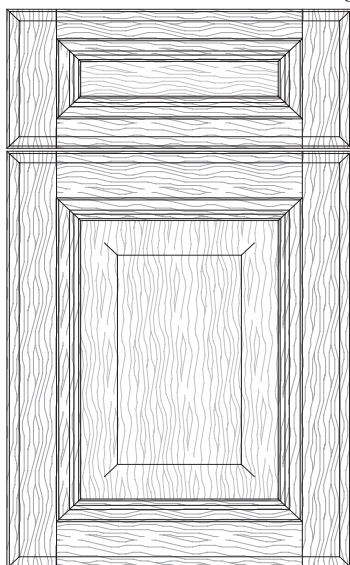**Door Style 10FM**

Shown with: MP604-76,
3" [76.2mm] Wide Stiles & Rails
PR302-38 and D79 Outside Edge

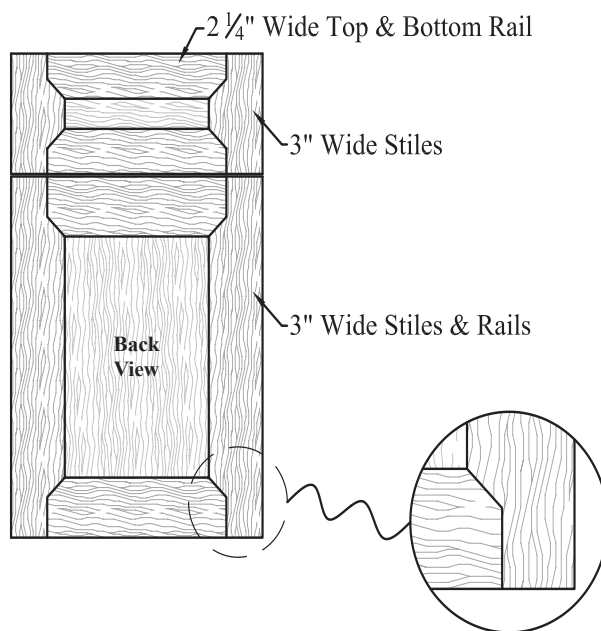

Not drawn to scale.

Ordering & Pricing Notes: French Miter Doors and Drawer Fronts**Ordering Guidelines**

1	Order Forms	Please use Door and/or Drawer Front Order Forms (E•Z Forms #2 and #3) .
---	-------------	--

Pricing

1	Pricing	Please see Section B.7 of our current Wholesale Pricing Catalog .
---	---------	---

Continued on next page...

► For PRICING ► See Section B.7 in our current Wholesale Pricing Catalog.

Technical Notes: French Miter Doors and Drawer Fronts

Cabinet Door & Drawer Front Options (Chapter B)

1	Door Styles	Available in all of the same door styles as the raised and flat panel mitered doors. Simply add an "FM" to the style number (ie: Style 10FM). See Sections B.5 and B.6 .
		Convex/Concave door styles 10FM and 10FM* are only available in radii 12" [304.8mm] and greater.
		French Miter construction is only available on door styles with a square frame (Ex: Style 10). Not available on doors styles with shaped rails (Ex: Style 2000).
2	Frames & Mullions	Please reference Frame & Mullion notes & glass size calculation in Section B.12 when calculating the visual opening size and/or glass size for doors with French Miter construction. See Sizes/Dimensions notes on the following page when determining finished stile and rail widths for French Miter doors need for the above calculations.

Functional Options (Chapter F)

1	Hinge Boring	Hinge boring is available for French Miter Mortise & Tenon - Raised & ¼" Flat Panel doors and drawer fronts. Please see the Outside Edge Profile Compatibility chart on our website: Resources/Technical Information for compatible profile options.
		The minimum width, at the narrowest point, for any stile or rail with 35mm hinge boring, without a "GRF" cut is 1¼" [44.5mm]. French Mitered doors ordered with this part size minimum will be limited to a Cup Drilling Distance of 3.0mm or less.

General Information (Chapter A)

1	Ready to Assemble (RTA)	RTA (<i>Ready to Assemble</i>) is available as an option.
---	-------------------------	---

Profile Options (Chapter E)

1	Stile & Rail Profiles	French Mitered doors are available with many of our MP600/MP6000 Series Mitered Profiles. Please see Section E.9 . Any MP600/MP6000 series profile number that has a corresponding [FM] symbol is available for a French Miter door.
		French Miter doors are also available with some of our "Traditional" Mortise & Tenon Stile & Rail profiles. Please see Section E.1 . Any profile number that has a corresponding [R-FM] symbol is recommended for French Miter construction. If choosing to order these R-FM profiles with French Miter construction, please use the matching French Miter door style along with the matching miter profile. For example, if you want a Style 10 door with stile & rail profile SR119 , but made with French Miter construction, please order door Style 10FM with mitered stile & rail profile MP603-57, Page E.9.2 .
		SR108 matches MP618-57 , SR119 matches MP603-57 , SR121 matches MP626-57 , SR127 matches MP637-57 , SR160 matches MP690-57 .
2	Outside Edge Profiles	Available with most outside edge profiles found in Section E.15 & E.16 .
		Exceptions will apply where thicknesses are not compatible. Not compatible with Molder Edge profiles.
3	¼" Flat Panel Doors and Drawers Fronts	¼" Flat Panel doors are available with ¼" veneered or MDF center panels.
		To simulate the look of a ¼" Flat Panel door or drawer front in a solid wood species, please order using a solid wood raised panel door style with the RVSCP-PR324 center panel profile. - See Section B.5 for mitered raised panel door and drawer front styles. - See Section E.13 for the RVSCP-PR324 center panel profile. - For pricing, please see Section B.7/B.5 of our current Wholesale Pricing Catalog.

Continued on next page...

► For PRICING ► See Section B.7 in our current Wholesale Pricing Catalog.

Technical Notes: French Miter Doors and Drawer Fronts...continued

Sizes/Dimensions

1	Thicknesses	When using French Mitered stile and rail profiles, French Mitered Mortise & Tenon raised panel and ¼" flat panel doors and DFs made from solid wood are available ¾" [19.1mm] and 1" [25.4mm] thick.
		See Section S.3 for possible thickness restrictions based on wood species.
2	Minimum & Maximum Sizes	The minimum width for your French Miter door varies and is based on the stile and rail profile guidelines you've chosen. Please contact our Customer Support Team for more information.
		The minimum height for your French Miter door will be the same minimum height as the Mitered Door Style you've chosen.
		The maximum height for a door using French Mitered construction is 96" [2438.4mm].
		The minimum visual rail length for doors with French Miter construction is 5½" [139.7mm].
		The minimum width for any stile and/or rail on a French Miter door is 1½" [38.1mm].
		The maximum width for any stile and/or rail on a French Miter door is 9⅞" [230.0mm], which will finish at 9" [228.5mm] as noted in the <i>Miter Profile Sizing</i> notes below.
3	Standard & Non-Standard Stile & Rail Widths	French Miter doors with any of the following would require non-standard construction: • Doors greater than 96" [2438.4mm] high. • Rails less than 5½" [139.7mm] long. • Stiles and/or rails greater than 9⅞" [230.0mm] wide. Please submit these requests to our Customer Support Team. A quote will be provided, as additional charges may apply.
		Standard stile & rail widths for French Miter doors utilizing Traditional (E.1) profiles will be 2¼" [57mm] unless otherwise specified.
		Standard stile & rail widths for French Miter doors utilizing Miter (E.9) profiles will be either 3" [76mm], 2¼" [57mm] or 1½" [38mm] unless otherwise specified. Standard widths are determined by the profile number. If ordering stile & rail widths at their standard sizes, please note the full MP profile number on the order form. • Example: MP604-76 Stiles • Example: MP604-57 Rails If you choose to deviate from the standard profile width, please include the first set of numbers of the MP profile (MP604) with the width dimension you prefer formatted after the hyphen (-). • Example: MP604 - 2¾" • Example: MP604 - 70mm
		Indicate any non-standard part sizes in the Special Instructions column on your order forms.
		All standard and non-standard part size rules apply. See Section A.5 for more information.
4	Miter Profile Sizing	Due to the manufacturing process, outside stiles and rails for French Miter doors utilizing miter profiles will finish at ⅛" [1.5mm] less in width than what is denoted by the stile and rail profile number. • For example, a French Miter door that is ordered with stile & rail profile MP604-76, will have outside stiles and rails that finish at 2⅝" [74.5mm] wide rather than 3" [76mm]. ◦ To result in a "true" 3" [76mm] wide stile & rail width, the outside stile and rail sizes must be ordered at 3⅞" [77.50mm], rather than 3" [76mm]. The same would apply for outside stile and rail widths specified that deviate from the widths denoted by the profile number. • For example, if ordering a French Miter door with stile & rail profile MP604, and you specify the outside stiles and rails to be 2¾" [70mm] wide, they will finish at 2⅞" [68.5mm] wide rather than 2¾" [70mm]. ◦ To result in a "true" 2¾" [70mm] wide stile & rail width, the outside stile and rail sizes must be ordered at 2⅞" [71.50mm], rather than 2¾" [70mm]. Center stiles and center rails for French Miter construction will finish at specified dimensions.
5	Flat Panel Door Maximum Sizes	The ¼" [6.4mm] veneered flat panel material used for center panels is 48"W x 96"H [1219.2mm x 2438.4mm]. Due to this, the maximum visible center panel <u>width</u> in a door with vertical grain and no center stile is 47⅞" [1197mm]. The maximum visible center panel <u>height</u> with no center rail is 95⅞" [2416.2mm].

French Miter Mortise & Tenon Raised & ¼" Flat Panel Doors and Drawer Fronts - END

► For PRICING ► See Section **B.7** in our current Wholesale Pricing Catalog.

[illegible]

Adventure Series Construction

The *Adventure Series* door style was introduced to give you more design flexibility to create a truly unique look. This series of doors allows you to pair a square edged stile or rail profile with any of the profiles from *Sections E.1, E.3, E.5* or *E.9* designated with an **AS**. See *Profile* notes on following pages for more information.

With **Styles 10ASTP, 1801ASTP, 40ASTP and 1401ASTP** you can either apply a detailed profile to the rails while keeping the stiles square, or reverse the construction and apply a detailed profile to the stiles while keeping the rails square.


- For **Styles 8000ASTP, 1000ASTP, 3098ASTP, 3101ASTP, 4044ASTP, 4043ASTP, 3097ASTP, 3099ASTP, 10ASMP, 8000ASMP, 1000ASMP, 40ASMP, 4044ASMP and 4043ASMP** you can apply a detailed profile to the rails while keeping the stiles square.
- For **Styles 1010ASTP, 3096ASTP, 4040ASTP, 3095ASTP, 1801ASMP, 3096ASMP, 1401ASMP and 3095ASMP** you can apply a detailed profile to the stiles while keeping the rails square.

The mortise & tenon construction even allows you to vary the stile & rail widths for more flexibility.

Step 1) Choose your door style. This will define the center panel type (raised or flat), how your stiles and rails will intersect, and what type of profile (traditional vs. miter) can be used.

Step 2) Choose the profile that you want applied to the detailed stiles or detailed rails.

- **Example: Style 10ASMP** will give you a square raised panel. The stiles will run the full height of the door with the rails running between the stiles. The detailed profile on the rails can be chosen from any of the mitered profiles in *Section E.9* that have a corresponding **AS** on the profile drawing.
- The example below shows a **Style 10ASMP** with the **MP643-57** profile applied to the *rails*.

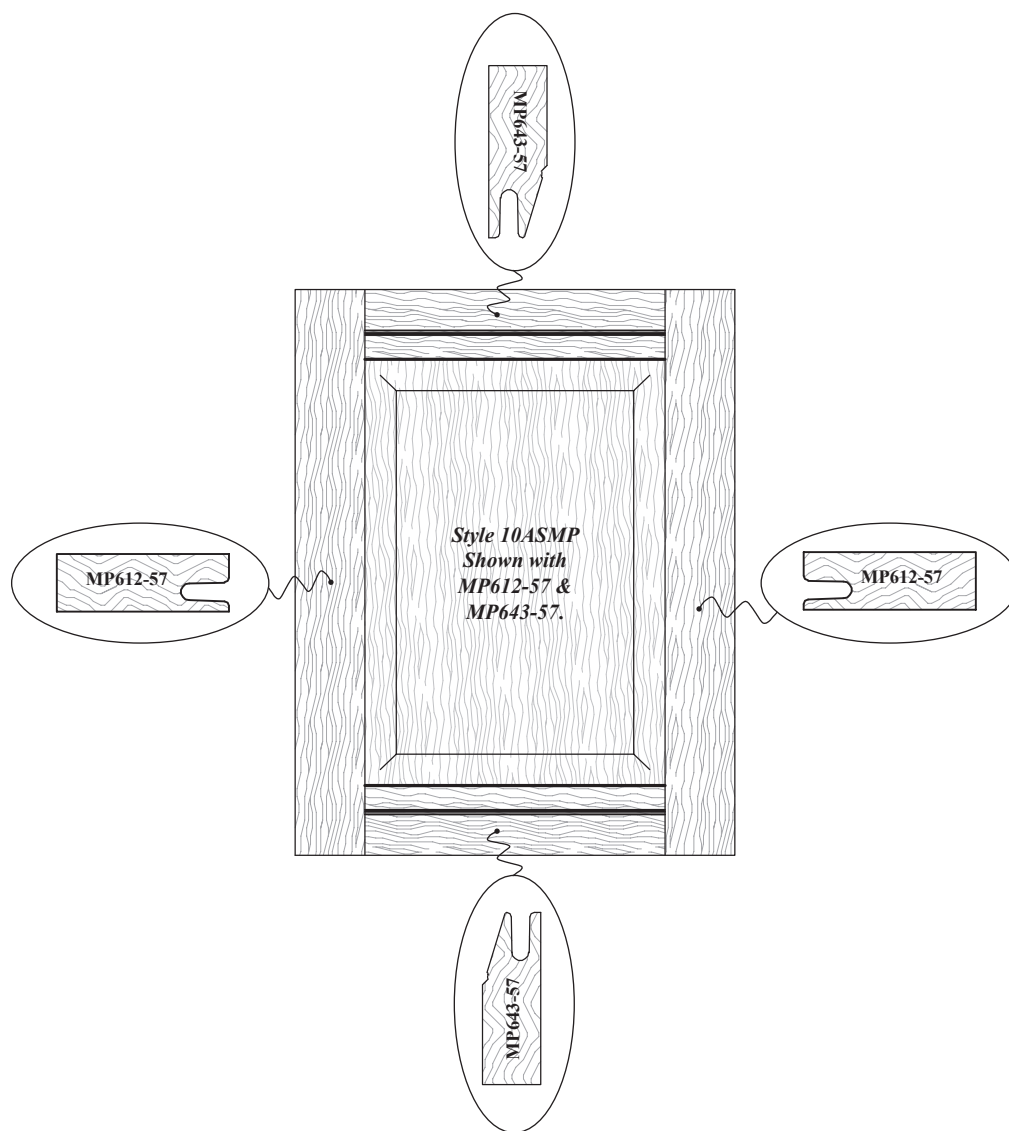


Not drawn to scale.


► For PRICING ► See Section [B.7](#) in our current Wholesale Pricing Catalog.

Adventure Series Door Styles - Raised Panel - Traditional Profiles (ASTP)


** Available with many profiles from Sections E.1, E.3 and E.5. See notes on the following pages for more information. **




Style: 10ASTP
PC: 101
Frame: PC101 x 0.6
Min. Size: 8x8
[203.2mm x 203.2mm]



Style: 1010ASTP
PC: 103
Frame: PC103 x 0.6
Min. Size: 13¼x8
[349.3mm x 203.2mm]




Style: 8000ASTP
PC: 103
Frame: PC103 x 0.6
Min. Size: 8x13¼
[203.2mm x 349.3mm]

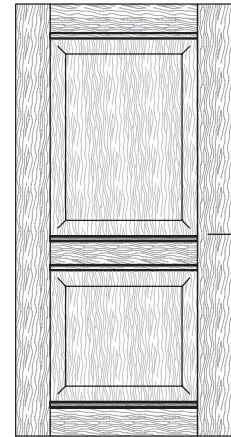


Style: 1000ASTP
PC: 103
Frame: PC103 x 0.6
Min. Size: 8x13¼
[203.2mm x 349.3mm]


Customer
Specified
60/40 Split
Shown




Style: 1801ASTP
PC: 101
Frame: PC101 x 0.6
Min. Size: 8x8
[203.2mm x 203.2mm]



Style: 3096ASTP
PC: 103
Frame: PC103 x 0.6
Min. Size: 13¼x8
[349.3mm x 203.2mm]



Style: 3098ASTP
PC: 103
Frame: PC103 x 0.6
Min. Size: 8x13¼
[203.2mm x 349.3mm]

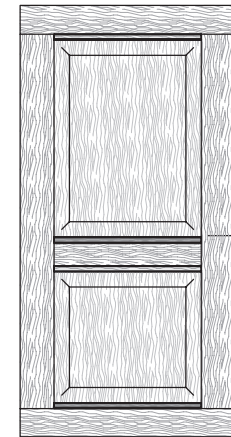

Style: 3101ASTP
PC: 103
Frame: PC103 x 0.6
Min. Size: 8x13¼
[203.2mm x 349.3mm]

Customer
Specified
60/40 Split
Shown




Profiled edges shown using SR153
(Profile not drawn to full scale)


► For PRICING ► See Section [B.7](#) in our current Wholesale Pricing Catalog.

Adventure Series Door Styles - 1/4" Flat Panel - Traditional Profiles (ASTP)



**** Available with many profiles from Sections E.1, E.3 and E.5. See notes on the following pages for more information. ****




Style: 40ASTP
PC: 201
Frame: PC101 x 0.6
Min. Size: 6"x6"
[168.3mm x 152.4mm]



Style: 4040ASTP
PC: 203
Frame: PC103 x 0.6
Min. Size: 9"x6"
[247.7mm x 168.3mm]




Style: 4044ASTP
PC: 203
Frame: PC103 x 0.6
Min. Size: 6"x9"
[168.3mm x 247.7mm]




Style: 4043ASTP
PC: 203
Frame: PC103 x 0.6
Min. Size: 6"x9"
[168.3mm x 247.7mm]


Customer
Specified
60/40 Split
Shown




Style: 1401ASTP
PC: 201
Frame: PC101 x 0.6
Min. Size: 6"x6"
[168.3mm x 152.4mm]



Style: 3095ASTP
PC: 203
Frame: PC103 x 0.6
Min. Size: 9"x6"
[247.7mm x 168.3mm]



Style: 3097ASTP
PC: 203
Frame: PC103 x 0.6
Min. Size: 6"x9"
[168.3mm x 247.7mm]



Style: 3099ASTP
PC: 203
Frame: PC103 x 0.6
Min. Size: 6"x9"
[168.3mm x 247.7mm]

Customer
Specified
60/40 Split
Shown




Profiled edges shown using SR153
(Profile not drawn to full scale)


► For PRICING ► See Section [B.7](#) in our current Wholesale Pricing Catalog.

Adventure Series Door Styles - Raised Panel - Miter Profiles (ASMP)


**** Available with many profiles from Section E.9. See notes on the following pages for more information. ****




Style: 10ASMP
PC: 301
Frame: PC301 x 0.6
Min. Size: 8x8
[203.2mm x 203.2mm]




Style: 1801ASMP
PC: 301
Frame: PC301 x 0.6
Min. Size: 8x8
[203.2mm x 203.2mm]



Style: 3096ASMP
PC: 303
Frame: PC303 x 0.6
Min. Size: 13¾x8
[349.3mm x 203.2mm]



Style: 8000ASMP
PC: 303
Frame: PC303 x 0.6
Min. Size: 8x13¾
[203.2mm x 349.3mm]

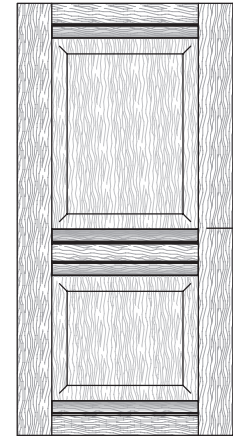


Style: 1000ASMP
PC: 303
Frame: PC103 x 0.6
Min. Size: 8x15½
[203.2mm x 393.7mm]




Profiled edges shown using MP643-57
(Profile not drawn to full scale)

Adventure Series Door Styles - ¼" Flat Panel - Miter Profiles (ASMP)


**** Available with many profiles from Section E.9. See notes on the following pages for more information. ****




Style: 40ASMP
PC: 401
Frame: PC301 x 0.6
Min. Size: 6¾x6
[168.3mm x 152.4mm]




Style: 1401ASMP
PC: 401
Frame: PC301 x 0.6
Min. Size: 6¾x6
[168.3mm x 152.4mm]




Style: 3095ASMP
PC: 403
Frame: PC303 x 0.6
Min. Size: 9¾x6¾
[247.7mm x 168.3mm]



Style: 4044ASMP
PC: 403
Frame: PC303 x 0.6
Min. Size: 6¾x9¾
[168.3mm x 247.7mm]

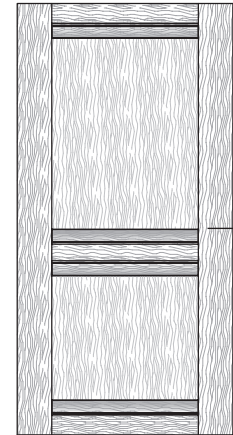

Style: 4043ASMP
PC: 403
Frame: PC303 x 0.6
Min. Size: 6¾x11¼
[168.3mm x 285.8mm]



Profiled edges shown using MP643-57
(Profile not drawn to full scale)

► For PRICING ► See Section [B.7](#) in our current Wholesale Pricing Catalog.

Ordering & Pricing Notes: Adventure Series - Raised & ¼" Flat Panel

Ordering Guidelines

1 Order Forms Please use *Adventure Series Order Form (E•Z Form #2.7)*.

Pricing

1 Pricing Please see *Section B.7* of our current **Wholesale Pricing Catalog**.

Technical Notes: Adventure Series - Raised & ¼" Flat Panel

Cabinet Door & Drawer Front Options (Chapter B)

1	Available Door Styles	Available with traditional profiles and raised panel door Styles 10, 1000, 1010, 1801, 8000 . Simply add an ASTP to the style number (ex: Style 10ASTP). • Also available as Style 3096ASTP, 3098ASTP, 3101ASTP for Adventure Series doors only.
		Available with miter profiles and raised panel door Styles 10, 1000, 1801, 8000 . Simply add an ASMP to the style number (ex: Style 10ASMP). • Also available as Style 3096ASMP for Adventure series doors only.
		Available with traditional profiles and flat panel door Styles 40, 1401, 4040, 4043, 4044 . Simply add an ASTP to the style number (ex: Style 40ASTP). • Also available as Style 3095ASTP, 3097ASTP, 3099ASTP for Adventure series doors only.
		Available with miter profiles and flat panel door Styles 40, 1401, 4043, 4044 . Simply add an ASMP to the style number (ex: Style 40ASMP). • Also available as Style 3095ASMP for Adventure series doors only.

Functional Options (Chapter F)

1 Hinge Boring Hinge boring is available for Adventure Series - Raised & ¼" Flat Panel doors and drawer fronts. Please see *Section F.1* for additional hinge boring requirements, ordering instructions and compatibility.

General Information (Chapter A)

1	Center Rail Placement	For styles 8000ASTP, 3098ASTP, 4044ASTP, 3097ASTP, 8000ASMP and 4044ASMP , center rail placement will be standard at a 50/50 split.
		For a center rail placement other than a 50/50 split, please order as Style 1000ASTP, 3101ASTP, 4043ASTP, 3099ASTP, 1000ASMP or 4043ASMP . These styles require center rail placement to be specified and refers to the distance from the top of the top rail to the top of the center rail. Please indicate this dimension in the special instructions area on the order form.
2	Ready to Assemble (RTA)	RTA is available as an option.

Profile Options (Chapter E)

1	Traditional Profile (ASTP)	This style is available with many of our stile & rail profiles from the following sections: • <i>Section E.1</i> : Traditional mortise & tenon stile & rail profiles. • <i>Section E.3</i> : Old World - Traditional mortise & tenon stile & rail profiles. • <i>Section E.5</i> : Shelf applied molding stile & rail profiles. Any profile number that has a corresponding [AS] symbol is available for an Adventure Series door.
		Additional approved profile combinations not marked in catalog: • Door styles 10ASTP & 40ASTP : SR108 stiles with SR152 rails. • Door styles 1801ASTP & 1401ASTP : SR152 stiles with SR108 rails.
2	Miter Profiles (ASMP)	This style is available with many of our stile & rail profiles from the following section: • <i>Section E.9</i> : MP600 / MP6000 series mitered stile & rail profiles. Any profile number that has a corresponding [AS] symbol is available for an Adventure Series door.
		Additional approved profile combinations not marked in catalog: • Door styles 10ASMP & 40ASMP : MP618 stiles with MP672 rails. • Door styles 1801ASMP & 1401ASMP : MP672 stiles with MP618 rails.
3	Square Stiles & Rails	Your chosen stile or rail profile can only be used in conjunction with an adjacent square stile or rail, unless noted otherwise. • If your rails are profiled, your stiles will be square. • If your stiles are profiled, your rails will be square.
		SR100 is the square profile used with the majority of compatible traditional mortise & tenon (<i>Section E.1</i>) and shelf applied molding (<i>Section E.5</i>) profiles. • Due to the Panel Plow Groove Cut (PPGC) location, SR118 will use the SR104 square profile. • SR145, SR146, SR157, SR160, SR163, SR167, SR169 will use the SR123 square profile.
		SR195 is the square profile used with the compatible Old World mortise & tenon profiles (<i>Section E.3</i>).
		MP612 is the square profile family used with the majority of compatible MP600/MP6000 series mitered mortise & tenon stile & rail profiles (<i>Section E.9</i>). • Due to the Panel Plow Groove Cut (PPGC) location, MP690, MP6112, MP6114 will use the MP628 square profile.

Continued on next page...

► For **PRICING** ► See *Section B.7* in our current Wholesale Pricing Catalog.

Technical Notes: Adventure Series - Raised & ¼" Flat Panel...continued

Profile Options (Chapter E)...continued

4	¼" Flat Panel Doors and Drawers Fronts	¼" Flat Panel doors are available with ¼" veneered or MDF center panels. To simulate the "look" of a "Flat Panel" door or drawer front in a solid wood species, please order using a solid wood raised panel door style with the RVSCP-PR324 center panel profile. See Section B.1 for Raised Panel Door & Drawer Front Styles and Section E.13 for the RVSCP-PR324 center panel profile. For pricing, please see Section B.1 of our current <i>Wholesale Pricing Catalog</i>.
5	Outside Edge Profiles	Available with most Outside Edge Profiles from Sections E.15 & E.16 . Please see "Outside Edge Profile Compatibility" chart and/or "Profile-Reveal Widths" chart on our website for more information.

Sizes/Dimensions

1	Thicknesses	When using Traditional stile and rail profiles, Adventure Series raised and ¼" flat panel doors made from solid wood are available ¾" [19.3mm] and 1" [25.4mm] thick. When using Mitered stile and rail profiles, Adventure Series raised and ¼" flat panel doors made from solid wood are available ¾" [19.1mm] and 1" [25.4mm] thick. When using Old World stile and rail profiles, Adventure Series raised and ¼" flat panel doors made from solid wood are available 1" [25.4mm], 1½" [28.6mm] and 1¾" [31.8mm] thick. See Section S.3 for possible thickness restrictions based on wood species.
2	Standard & Non-Standard Stile & Rail Widths	Modification of stile and rail widths is allowed. Adventure Series construction also gives you the flexibility to vary your stile widths from your rail widths. Standard stile & rail widths for Adventure Series doors utilizing Traditional (E.1) or Shelf Applied (E.5) profiles will be 2¼" [57mm] unless otherwise specified. Standard stile & rail widths for Adventure Series doors utilizing Old World (E.3) profiles will be 3" [76mm] unless otherwise specified. Standard stile & rail widths for Adventure Series doors utilizing Miter (E.9) profiles will be either 3" [76mm], 2¼" [57mm] or 1½" [38mm] unless otherwise specified. Standard widths are determined by the profile number. If ordering stile & rail widths at their standard sizes, please note the full MP profile number on the order form. • Example: MP612-57 Stiles • Example: MP643-76 Rails If you choose to deviate from the standard profile width, please include the first set of numbers of the MP profile (MP643) with the width dimension you prefer formatted after the hyphen (-). • Example: MP643 - 2¾" • Example: MP643 - 70mm Indicate any non-standard part sizes in the "Special Instructions" column on your order forms. All standard and non-standard part size rules apply. See Section A.5 for more information.
3	Adventure Series - Miter Profile Sizing	Due to the manufacturing process, outside stiles and rails for Adventure Series doors utilizing miter profiles will finish at ⅛" [1.5mm] less in width than what is denoted by the stile and rail profile number. • For example, an Adventure Series door that is ordered with stile & rail profile MP643-76, will have outside stiles and rails that finish at 21⅛" [74.5mm] wide rather than 3" [76.0mm]. ◦ To result in a "true" 76mm wide stile & rail width, the outside stile and rail sizes must be ordered at 77.50mm, rather than 76mm. The same would apply for outside stile and rail widths specified that deviate from the widths denoted by the profile number. • For example, if ordering an Adventure Series door with stile & rail profile MP643, and you specify the outside stiles and rails to be 2¾" [70mm] wide, they will finish at 2⅞" [68.5mm] wide rather than 2¾" [70.0mm]. ◦ To result in a "true" 70mm wide stile & rail width, the outside stiles and rail sizes must be ordered at 71.50mm, rather than 70.0mm. Center stiles and center rails for Adventure Series construction will finish at specified dimensions. The maximum width for any stile or rail on an Adventure Series door using a miter profile is 9⅛" [230.0mm], which will finish at 9" [228.5mm] as noted above.


Adventure Series Raised & ¼" Flat Panel Doors - END

► For PRICING ► See Section **B.7** in our current Wholesale Pricing Catalog.


No-Panel Cut (NPC) Frame Only Doors

WalzCraft offers the option to order a frame only door without the center panel cut. Sometimes used as a *wine cooler door*, this versatile product can be used anywhere that you need a frame door but don't need any type of center panel.



This is a cross-section of a Style 10 - "Frame Only" door with the SR107-NPC profile.

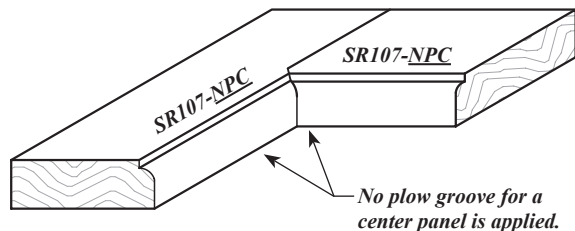



This is a cross-section of a Style 10 - "Frame Only" door with the SR100-NPC profile.

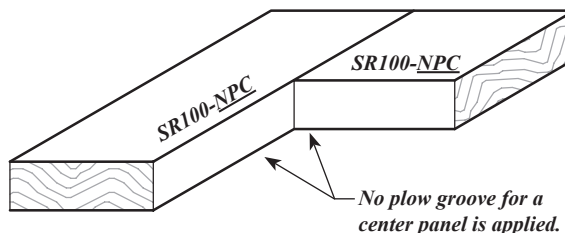



Style 10
Frame Only Door

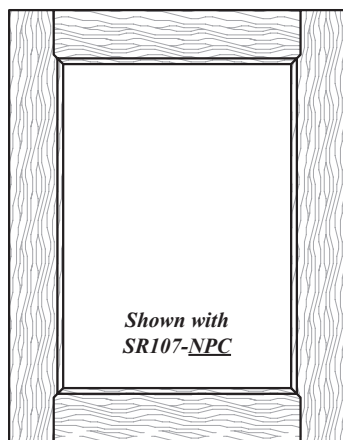

Style 10M
Frame Only Door

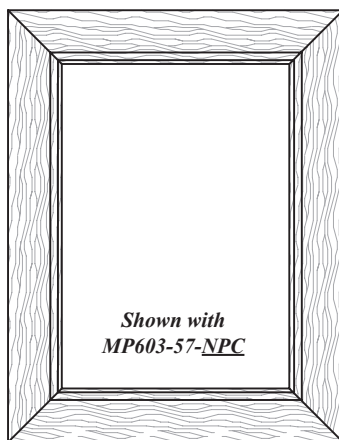



Style 10FM
Frame Only Door

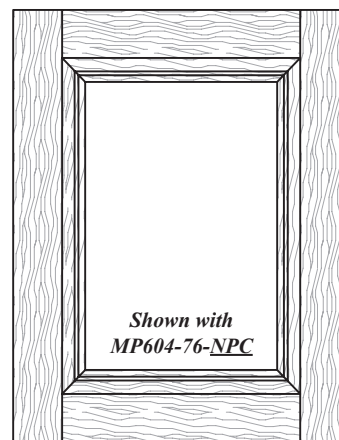

Not drawn at full scale.

No-Panel Cut (NPC) Frame Only Doors - Applied Moldings

WalzCraft offers alternative inside edge applied moldings for No-Panel Cut (NPC) Frame Only applications. The moldings are modified such that the bottom of the molding will be flush with the bottom of the stile or rail.

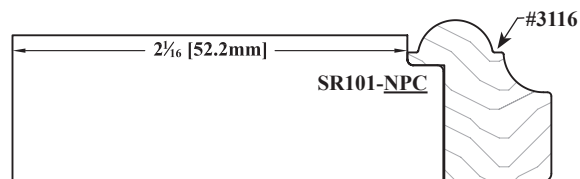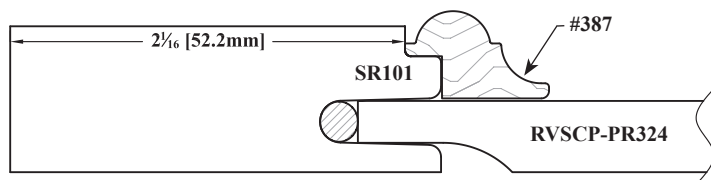

For a list of available No-Panel Cut (NPC) Inside Edge Applied Moldings, please see *Section N.5*.

Continued on next page...

► For PRICING ► See Section B.8 in our current Wholesale Pricing Catalog.

Ordering & Pricing Notes: No-Panel Cut (NPC) Frame Only Doors

Ordering Guidelines

1	Order Forms	Please use <i>Door Order Form (E•Z Form #2)</i> .
2	Required Information	Note “NPC” at the end when indicating your chosen Stile & Rail profile (ex: MP609-57-NPC) and check the “Frame Only” box when entering your quantities, door style and sizes.
Pricing		
1	Pricing	Please see <i>Section B.8</i> of our current Wholesale Pricing Catalog .

Technical Notes: No-Panel Cut (NPC) Frame Only Doors

Cabinet Door & Drawer Front Options (Chapter B)

1	Door Styles	Available as a Style 10 Frame Only, Style 10M Frame Only and Style 10FM Frame Only door.
---	-------------	--

Functional Options (Chapter F)

1	Hinge Boring	Hinge boring is available for No-Panel Cut Frame Only doors. Please see <i>Section F.1</i> for additional hinge boring requirements, ordering instructions and compatibility.
---	--------------	---

General Information (Chapter A)

1	Ready to Assemble (RTA)	RTA is available as an option.
---	-------------------------	--------------------------------

Profile Options (Chapter E)

1	Stile & Rail Profiles	Style 10 Frame Only Doors: Available with all Traditional and Old World stile & rail profiles from <i>Sections E.1</i> and <i>E.3</i> . Stile and rail joints will be French Mitered unless utilizing square edged profiles. Square edged profiles SR100, SR104, SR123 and SR195 will be Traditional joinery, as shown in the SR100-NPC drawing to the left.
		Style 10M Frame Only Doors: Available with all MP600/MP6000 , MP700 and MP900 Mitered Stile & Rail profiles. All stile and rail joints will be fully mitered.
		Style 10FM Frame Only Doors: Available with many of our MP600/MP6000 Series Mitered Stile & Rail profiles. Any MP600/MP6000 series profile number that has a corresponding [FM] symbol is available for a French Miter door. All stile and rail joints will be French Mitered.
2	Outside Edge Profiles	Available with most outside edge profiles found in <i>Section E.15 & E.16</i> . Exceptions will apply where thicknesses are not compatible. Style 10FM doors not compatible with Molder Edge profiles.
3	Applied Moldings	Modified Inside Edge Applied Moldings are available for No-Panel Cut (NPC) Frame Only doors. Please see <i>Section N.5</i> for available options. For a cross-reference guide detailing standard Applied Moldings and the corresponding NPC Applied Moldings, please reference the <i>NPC Applied Molding Cross-Reference Guide</i> on our website under: Resources/Technical Information .


Sizes/Dimensions

1	Thicknesses	When using Traditional stile & rail profiles, No-Panel Cut Style 10 doors made from solid wood are available ¾" [19.3mm] and 1" [25.4mm] thick.
		When using Old World stile & rail profiles, No-Panel Cut Style 10 doors made from solid wood are available 1" [25.4mm], 1½" [28.6mm] and 1¼" [31.8mm] thick.
		When using Traditional mitered stile & rail profiles, No-Panel Cut Style 10M doors made from solid wood are available ¾" [19.3mm] and 1" [25.4mm] thick.
		When using Old World mitered stile & rail profiles, No-Panel Cut Style 10M doors made from solid wood are available 1" [25.4mm], 1½" [28.6mm] and 1¼" [31.8mm] thick.
		When using French Mitered stile and rail profiles, No-Panel Cut Style 10FM doors made from solid wood are available ¾" [19.3mm] and 1" [25.4mm] thick.
		See <i>Section S.3</i> for possible thickness restrictions based on wood species.
2	Minimum & Maximum Sizes	The maximum height for a door using French Miter construction is 96" [2438.4mm].
		The minimum length for a rail on a door using French Miter construction is 5½" [139.7mm].
		The maximum width for any stile and/or rail on a door using French Miter construction is 8³⁄₃₂" [228.0mm].
		No-Panel Cut Frame Only doors with any of the following would require non-standard construction: - Doors greater than 96" [2438.4mm] high. - Rails less than 5½" [139.7mm] long. - Stiles and/or rails greater than 8³⁄₃₂" [228.0mm] wide. Please submit these requests to our Customer Support Team. A quote will be provided, as additional charges may apply.
3	Stile & Rail Widths	No-Panel Cut (NPC) Frame Only doors using French Miter construction will have the stiles & rails finish at the exact width specified. There will be <u>no</u> width reduction due to the French Miter manufacturing process.

No Panel Cut Frame Only Doors - END


[illegible]

Contemporary Slab & Batten Doors




Style: 1050*
Drawer Front

PC: 509
Frame: NA
Min. Size: 5x4⅜
[127mm x 111.1mm]




Style: 1270*
Drawer Front

PC: 500
Frame: NA
Min. Size: 3x3
[76.2mm x 76.2mm]




Style: 1270*
Drawer Front

PC: 500
Frame: NA
Min. Size: 3x3
[76.2mm x 76.2mm]




Style: 1271*
Drawer Front

PC: 502
Frame: NA
Min. Size: *See Notes*




Style: 1272*
Drawer Front

PC: 502
Frame: NA
Min. Size: *See Notes*




Style: 1050

PC: 510
Frame: NA
Min. Size: 6x4⅜
[152.4mm x 111.1mm]
Use PC509 if ordering
without battens.




Style: 1270

PC: 501
Frame: NA
Min. Size: 6x4⅜
[152.4mm x 111.1mm]
Use PC500 if ordering
without battens.




Style: 1270

PC: 501
Frame: NA
Min. Size: 6x4⅜
[152.4mm x 111.1mm]
Use PC500 if ordering
without battens.



Style: 1271


PC: 503
Frame: NA
Min. Size: *See Notes*
Use PC502 if ordering
without battens.



Style: 1272

PC: 503
Frame: NA
Min. Size: *See Notes*
Use PC502 if ordering
without battens.

Style 1050 Cross Section

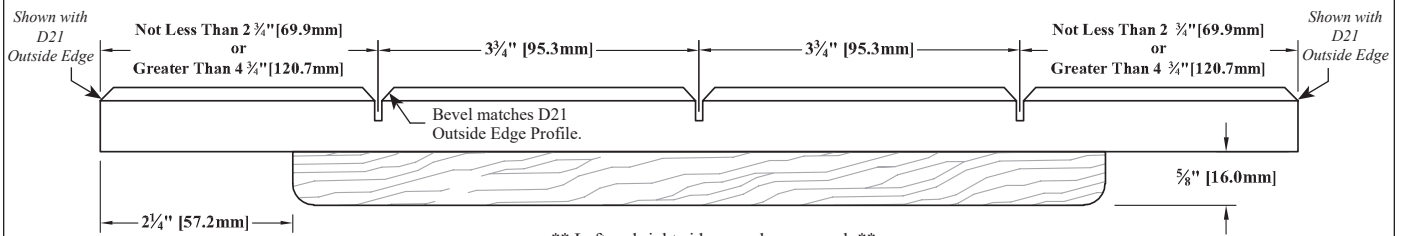

Ordering & Pricing Notes: Contemporary Slab & Batten Doors

Ordering Guidelines

1	Order Forms	Please use <i>Door and/or Drawer Front Order Forms (E-Z Forms #2 and #3)</i> .
Pricing		
1	Pricing	Please see <i>Section B.9</i> of our current Wholesale Pricing Catalog .

Technical Notes: Contemporary Slab & Batten Doors

Convex/Concave Options (Chapter D)

1	Curved Products	The  indicates door styles available as Curved Products; these are constructed with NO Battens . See <i>Chapter D</i> for ordering guidelines.
---	-----------------	--

Functional Options (Chapter F)

1	Hinge Boring	Hinge boring is available for Contemporary Slab & Batten doors. Please see <i>Section F.1</i> for additional hinge boring requirements, ordering instructions and compatibility.
---	--------------	--

Continued on next page...

► For PRICING ► See Section B.9 in our current Wholesale Pricing Catalog.

Technical Notes: Contemporary Slab & Batten Doors...continued

General Information (Chapter A)

1	Grain Direction	Arrows (↔) indicate standard grain direction; grain direction may be specified at NO additional cost.
2	Warranty	Solid wood slab doors ordered without battens or with battens shipped unattached will carry no warranty against warpage. Please see Section A.8 - Warranties for more information on Glued Up Panel expansion/contraction, warping, bowing and twisting. • For sizes outside of warranty limitations, we recommend using our Style 60 wood veneer doors with an MDF core (see Section B.10 & B.11).
3	Ready to Assemble (RTA)	RTA is not available as an option for Contemporary Slab & Batten doors.

Hardware Options (Chapter I)

1	165° & 170° Hinges and Hinge Boring	Please note that our 165° long arm hinges, Series 200 shown in Section I.1 and the 170° long arm hinges shown in Section I.7 , when used with the standard hinge bore placement shown in Section F.1 , are not compatible with our standard batten placement shown on page B.9.3 (<i>custom batten placement may be an option</i>).
---	-------------------------------------	---

Material Options

1	Solid Wood	With this product being produced in solid wood, you could experience sunken glue joints or variances in thickness on the face of the staves due to expansion and contraction of the wood. This is more noticeable in darker stain colors and solid tone finishes and product finished with a water base finish. If this is a concern, we would recommend you order your door in raw MDF when applying a SolidTone, or order as a Style 60/60* (Section B.10 or B.11), which are MDF based, if ordering with a darker stain color.
---	------------	---

Miscellaneous

1	Full Overlay or Inset Door Applications	Styles 1050, 1270, 1271 and 1272 are not recommended for applications with tight tolerances due to concerns regarding expansion and contraction of overall width dimensions on vertical grain doors and height dimensions on horizontal grain doors.
2	Continuous Grain (End Matched Pattern)	Upon request, WalzCraft will manufacture hardwood components using a Continuous Grain - End Matched Pattern. This refers exclusively to the matching of grain in the direction of the grain. Available only with Contemporary Slab & Batten Doors and solid wood slab and RP drawer fronts. Additional custom engineering charges will apply. To inquire, please contact our Customer Support Team. Drawings and order details may be emailed to: customersupport@WalzCraft.com
3	Battens	Dashed lines on drawings indicate the battens that are attached to the back side of the door. Styles 1050, 1270, 1271 and 1272 can be ordered without battens. Indicate " No Battens " in the <i>Special Instructions</i> on your order form. See warranty information above. Styles 1050, 1270, 1271 and 1272 can be ordered with battens shipped unattached. Indicate " Ship Battens Unattached " in the <i>Special Instructions</i> on your order form. See warranty information above. Battens will always run across the grain. • Battens are not glued to the doors, they are attached with screws. • Holes in the battens are drilled oversized to allow for expansion and contraction. • Battens that are requested to be shipped unattached, will have the holes drilled (in the battens only) and screws will be included. • See warranty information above.

Profile Options (Chapter E)

1	Style 1270/1270*	Style 1270 doors and 1270* drawer fronts require the choice of an outside edge profile. Available with any outside edge profile from Section E.15 .
2	Style 1271/1271*	Style 1271 doors and 1271* drawer fronts require the choice of an RP drawer front profile and an outside edge profile. Only available with the following RP (Raised Panel) drawer front profiles from Section B.16 : • 318-25RP*, 319-10RP*, 320-32RP*, 321-32RP*, 328-32RP*, 329-19RP* . As noted above, when applying an RP profile, you must also specify an outside edge profile • Available with all standard outside edge profiles from Section E.15 except those noted as 3/4" Only . • There is no additional charge for adding the outside edge.
3	Style 1272/1272*	Style 1272 doors and 1272* drawer fronts require the choice of an RP drawer front profile and an outside edge profile. Available with any RP (Raised Panel) drawer front profile from Section B.16 with the exception of those listed for Style 1271 above. As noted above, when applying an RP profile, you must also specify an outside edge profile • Available with all standard outside edge profiles from Section E.15 except those noted as 3/4" Only . • There is no additional charge for adding the outside edge.

Continued on next page...

► For PRICING ► See Section B.9 in our current Wholesale Pricing Catalog.




Technical Notes: Contemporary Slab & Batten Doors...continued

Sizes/Dimensions

1	Minimum Sizes: • Style 1271/1271* • Style 1272/1272*	See <i>Section B.16</i> for minimum size calculation when applying an RP profile with an outside edge profile.
2	Thicknesses	Contemporary Slab & Batten door and DF styles 1050, 1050*, 1270 and 1270* made from solid wood are available $\frac{3}{4}$ " [19.1mm] and 1" [25.4mm] thick. Style 1271/1271* doors and drawer fronts finish at $\frac{15}{16}$ " [23.8mm] thick. Style 1272/1272* doors and drawer fronts finish at $1\frac{1}{8}$ " [28.6mm] thick. See <i>Section S.3</i> for possible thickness restrictions based on wood species.

Batten Placement (As seen from backside of door/drawer front)

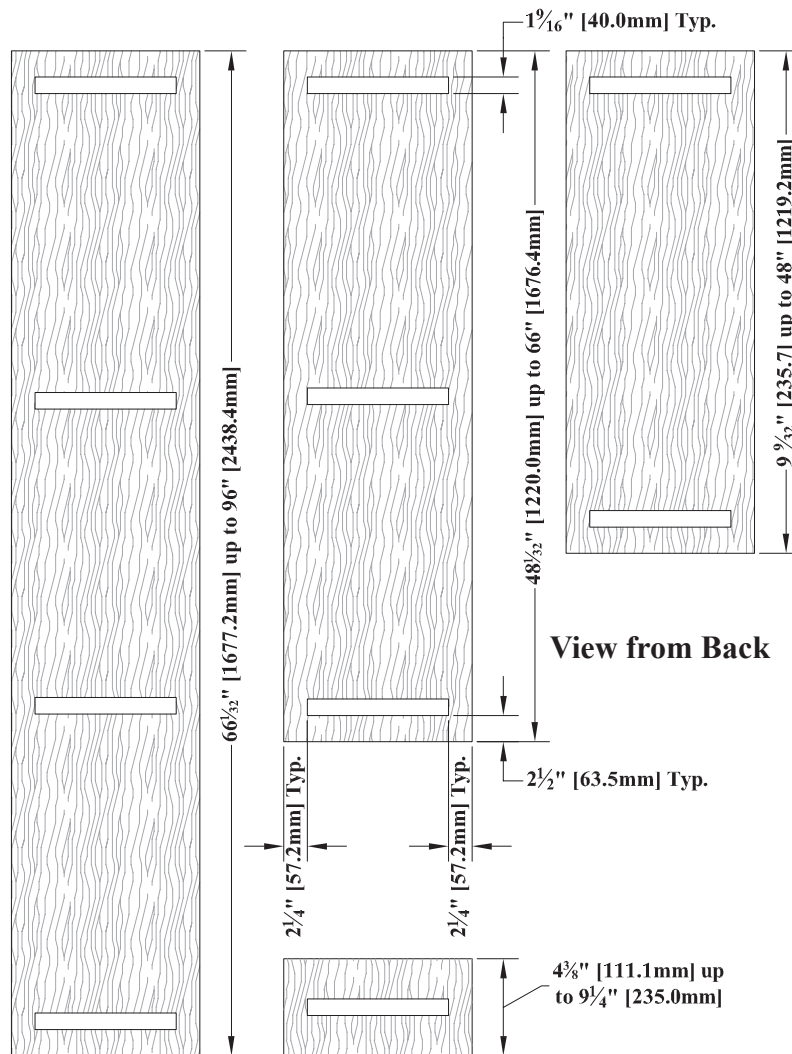


- Door Styles **1050, 1270, 1271 and 1272** are shipped with matching wood battens attached by screws, to the back of the door.
- Battens measure $\frac{5}{8}$ " [16.0mm] thick x $1\frac{9}{16}$ " [40.0mm] wide.
- Positioned $2\frac{1}{4}$ " [57.2mm] from the left and right edges of the door and $2\frac{1}{2}$ " [63.5mm] down from the top and up from the bottom of the door.
- Special batten placement or size is available if our standard guidelines conflict with hardware. Please refer these requests to our Customer Support Team. Additional design charges will apply.
- Drawings depict batten placement on back side of door.


Contemporary Slab & Batten Doors and Drawer Fronts - END

► For PRICING ► See Section **B.9** in our current Wholesale Pricing Catalog.


Contemporary Mortise & Tenon Doors

**Style: 1025**


PC: 505
 Frame: PC101 x 0.6
 Min. Size: 6x6
 [152.4mm x 152.4mm]
 Max. Height: 29 $\frac{5}{16}$ "
 [744.5mm]
 (If over the max. height,
 order as a Style 1125)

**Style: 1125**


PC: 507
 Frame: PC103 x 0.6
 Min. Size: 6x29 $\frac{5}{16}$ "
 [152.4mm x 746.1mm]
 Max. Height: 54 $\frac{1}{2}$ "
 [1393.8mm]
 (If over the max. height,
 order as Style 2523)

**Style: 2523**


PC: 511
 Frame: PC108 x 0.6
 Min. Size: 6x54 $\frac{5}{16}$ "
 [152.4mm x 1385.4mm]
 Max. Height: 80 $\frac{1}{16}$ "
 [2043.1mm]

**Style: 1025***
Drawer Front


PC: 505
 Frame: PC101 x 0.6
 Min. Size: 6x6
 [152.4mm x 152.4mm]
 Drawn at 8" [203.2mm] high

**Style: 2510**


PC: 504
 Frame: PC101 x 0.6
 Min. Size: 7x6
 [177.8mm x 152.4mm]
 Max. Width: 30 $\frac{1}{16}$ "
 [763.6mm]
 (If over the max. width,
 order as a Style 2515)

**Style: 2515**


PC: 508
 Frame: PC103 x 0.6
 Min. Size: 30 $\frac{1}{8}$ x15 $\frac{1}{2}$ "
 [765.2mm x 393.7mm]
 Max. Width: 54 $\frac{1}{4}$ "
 [1393.8mm]

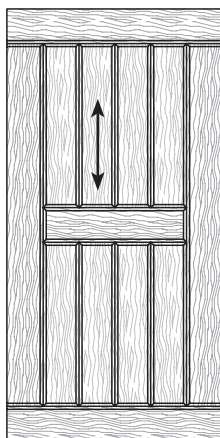**Style: 2511**


PC: 506
 Frame: PC103 x 0.6
 Min. Size: 7x11 $\frac{1}{4}$ "
 [177.8mm x 285.8mm]

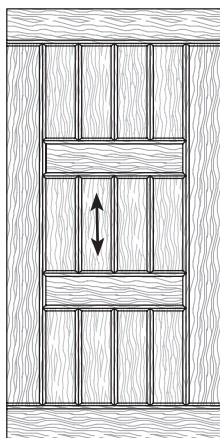**Style: 2522**

PC: 512
 Frame: PC108 x 0.6
 Min. Size: 7x15 $\frac{1}{4}$ "
 [177.8mm x 400.1mm]

**Style: 2510***
Drawer Front


PC: 504
 Frame: PC101 x 0.6
 Min. Size: 7x6
 [177.8mm x 152.4mm]
 Max. Width: 30 $\frac{1}{16}$ "
 [763.6mm]
 (If over the max. width,
 order as a Style 2515*)

**Style: 2515***
Drawer Front


PC: 508
 Frame: PC103 x 0.6
 Min. Size: 30 $\frac{1}{8}$ x6 $\frac{5}{8}$ "
 [765.2mm x 152.4mm]
 Max. Width: 54 $\frac{1}{4}$ "
 [1393.8mm]

► For PRICING ► See Section B.9 in our current Wholesale Pricing Catalog.


Style 1025 Contemporary Mortise & Tenon

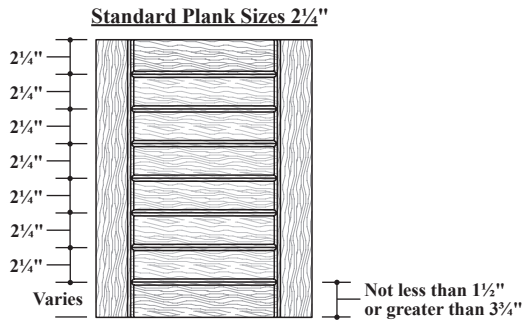


Style 2510 Contemporary Mortise & Tenon

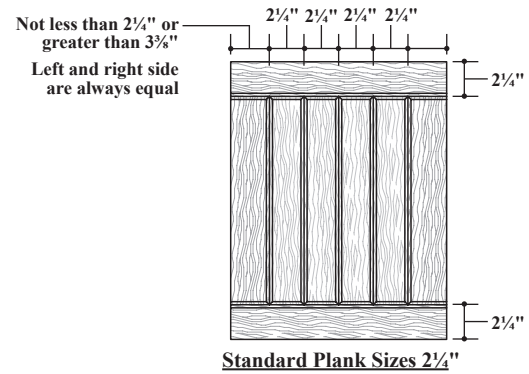

Style 1025 with D21, SR116 (Mirror Joint), PR314-06

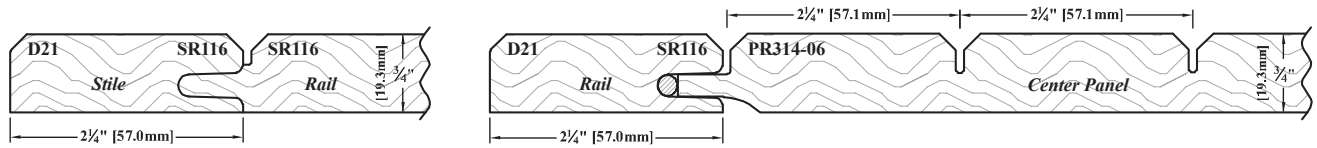

Style 1025 with D33, SR149 (Mirror Joint), PR339-04

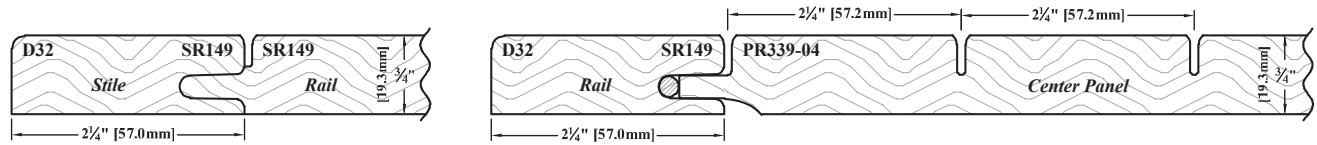

Continued on next page...

► For PRICING ► See Section [B.9](#) in our current Wholesale Pricing Catalog.

Ordering & Pricing Notes: Contemporary Mortise & Tenon Doors

Ordering Guidelines

1 Order Forms Please use *Door and/or Drawer Front Order Forms (E•Z Forms #2 and #3)*.

Pricing

1 Pricing Please see *Section B.9* of our current *Wholesale Pricing Catalog*.

Technical Notes: Contemporary Mortise & Tenon Doors

Cabinet Door & Drawer Front Options (Chapter B)

1 Mortise & Tenon Allows for center panel expansion and contraction.

General Information (Chapter A)

1 Grain Direction Arrows (←→) shown indicate standard grain direction. Grain direction may not be specified.

2 Ready to Assemble (RTA) RTA is available as an option for Contemporary Mortise & Tenon doors.

Functional Options (Chapter F)

1 Hinge Boring Hinge boring is available for Contemporary Mortise & Tenon doors. Please see *Section F.1* for additional hinge boring requirements, ordering instructions and compatibility.
For **Styles 2510, 2511, 2515 and 2522**, please check hinge bore placement compatibility when increasing the width of top and bottom rails.

Profile Options (Chapter E)

1 Design Style Contemporary Mortise & Tenon doors utilize an outside edge profile (*Section E.15*), a mirror stile & rail joint (*Section E.2*), a center panel profile (*Section E.12*), and grooves on the center panel that all match one another, creating the plank door look.
• The center panel is one solid piece, not individual planks (see drawings on previous page).

2 Profile Combinations The **SR116** mirror joint is paired with center panel profile **PR314-06** and outside edge profile **D21**.
• Grooves are added to the center panel that mimic our center panel face rout pattern CPFR2400.
The **SR149** mirror joint is paired with center panel profile **PR339-04** and outside edge profile **D32** or **D51**.
• Grooves are added to the center panel that mimic our center panel face rout pattern CPFR2500.

Sizes/Dimensions

1 Styles 1025, 1125, 2523
(See above illustrations)
Bottom Rail dimension will vary depending on the height; the remaining stiles and rails will be 2¼" [57.2mm] wide. When ordering stile & rail sizes other than 2¼" [57.2mm] wide, plank sizes may be compromised requiring custom configuration. Additional charges may apply to customize configuration.
Frame only doors will have all stiles and rails at 2¼" [57.2mm] wide unless otherwise noted.

2 Styles 2510, 2511, 2515, 2522
(See above illustrations)
Left and right stile dimensions will vary depending on the overall width of door. The top and bottom rails will be 2¼" [57.2mm] wide. When ordering stile sizes *other than noted in the illustration above*, plank sizes may be compromised requiring custom configuration. Additional charges may apply to customize configuration.
Frame only doors will have all stiles and rails at 2¼" [57.2mm] wide unless other noted.


3 Non-Standard Parts If you plan to align Contemporary Mortise & Tenon doors with other, "Frame Only" Contemporary Mortise & Tenon doors, part sizes could vary due to required opening sizes. WalzCraft does not automatically modify the width of the stiles/rails to compensate for this.

4 Thicknesses Contemporary mortise & tenon raised panel doors and drawer fronts are available ¾" [19.1mm] and 1" [25.4mm] thick.
See *Section S.3* for possible thickness restrictions based on wood species.


Contemporary Mortise & Tenon Doors - END

► For PRICING ► See *Section B.9* in our current Wholesale Pricing Catalog.


[illegible]

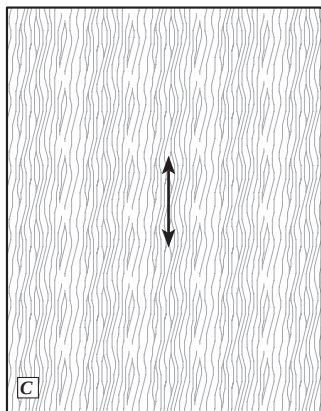

Style: 60
PC: Determined by chosen
EBT Option

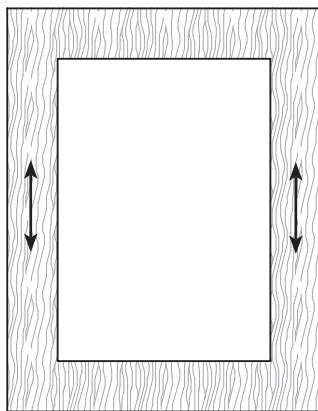


Style: 60 Frame Only
PC: Determined by chosen
EBT Option




Style: 60* Drawer Front
PC: Determined by chosen
EBT Option

EBT201 Family (Wood Veneer Edge - Machine Applied)

EBT201

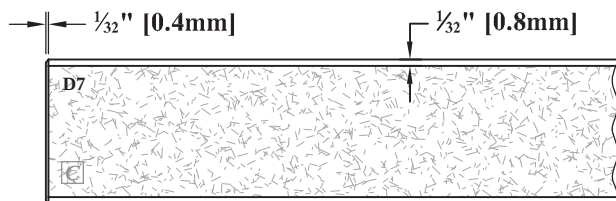


- Only available with D7 Outside Edge Profile.




Minimum Size: 3" x 3" [76.2mm x 76.2mm] after edgebanding.


EBT201 - Frame Only

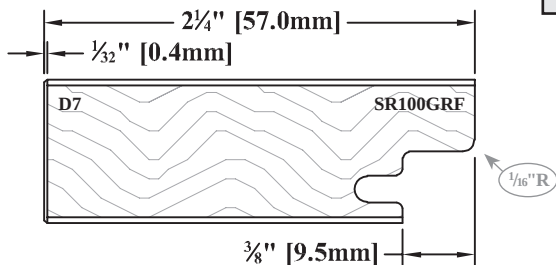


- Only available with D7 Outside Edge Profile.
- Only available with SR100GRF S/R Profile.



Minimum Size: 6 3/4" x 6" [168.3mm x 152.4mm] after edgebanding.

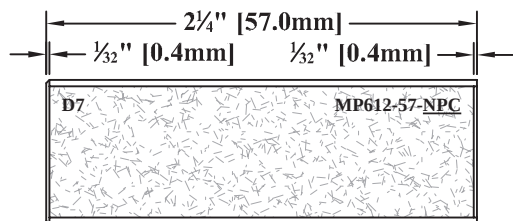EBT201 - Frame Only - NPC
(No-Panel Cut)

- Only available with D7 Outside Edge Profile.
- Only available with MP612-57-NPC or MP612-76-NPC Stile/Rail Profile.




Minimum Size: 6" x 6" [152.4mm x 152.4mm] after edgebanding.

Continued on next page...


► For PRICING ► See Section [B.10](#) in our current Wholesale Pricing Catalog.

EBT202 Family ($\frac{1}{8}$ " [3.2mm] Solid Wood Edge - Machine Applied)

EBT202

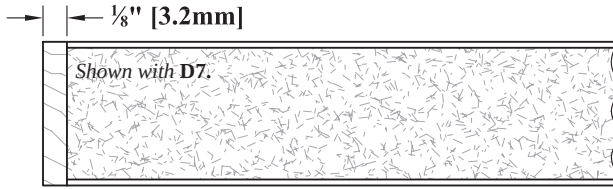


- Only available with D7, D33, D66, D147 Outside Edge Profile.




Minimum Size: $3\frac{1}{4}$ " x $3\frac{1}{4}$ " [82.6mm x 82.6mm] after edgebanding.


EBT202 - Frame Only

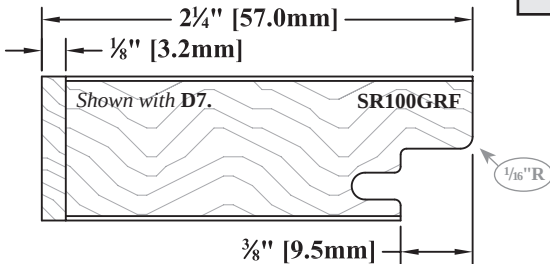


- Only available with D7, D33, D66, D147 Outside Edge Profile.
- Only available with SR100GRF S/R Profile.



Minimum Size: $6\frac{1}{8}$ " x 6" [168.3mm x 152.4mm] after edgebanding.

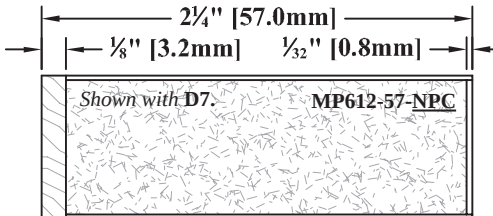EBT202 - Frame Only - NPC
(No-Panel Cut)


- Only available with D7, D33, D66, D147 Outside Edge Profile.
- Only available with MP612-57-NPC or MP612-76-NPC Stile/Rail Profile.




Minimum Size: 6" x 6" [152.4mm x 152.4mm] after edgebanding.

Continued on next page...


► For PRICING ► See Section [B.10](#) in our current Wholesale Pricing Catalog.

EBT501 Family (Solid Wood Edge - Hand Applied)

EBT501

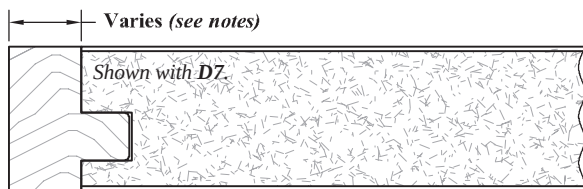


- Not all Outside Edge Profiles are available.
- Width of solid wood edge will vary based on chosen Outside Edge Profile.




Minimum Size: Varies based on chosen Outside Edge Profile. See Notes for more information.


EBT501 - Frame Only

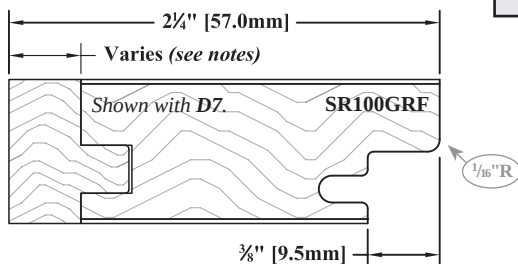


- Not all Outside Edge Profiles are available.
- Width of solid wood edge will vary based on chosen Outside Edge Profile.
- Only available with **SR100GRF** S/R Profile.



Minimum Size: Varies based on chosen Outside Edge Profile. See Notes for more information.

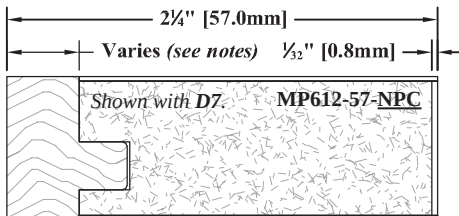EBT501 - Frame Only - NPC
(No-Panel Cut)

- Not all Outside Edge Profiles are available.
- Width of solid wood edge will vary based on chosen Outside Edge Profile.
- Only available with **MP612-57-NPC** or **MP612-76-NPC** S/R Profile.




Minimum Size: Varies based on chosen Outside Edge Profile. See Notes for more information.

Continued on next page...


► For PRICING ► See Section [B.10](#) in our current Wholesale Pricing Catalog.

EBT601 Family (Solid Wood Edge - Hand Applied)

EBT601

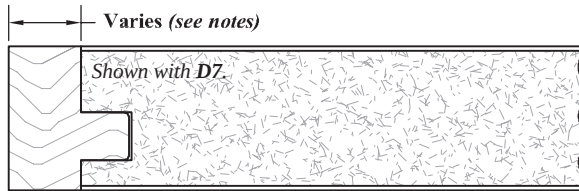


- Not all Outside Edge Profiles are available.
- Width of solid wood edge will vary based on chosen Outside Edge Profile.




Minimum Size: Varies based on chosen Outside Edge Profile. See Notes for more information.


EBT601 - Frame Only

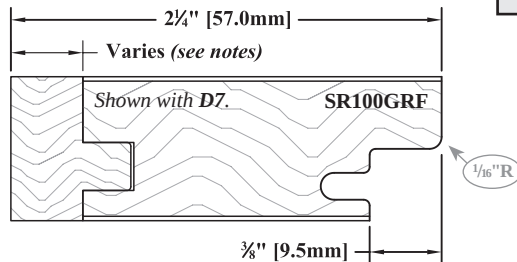


- Not all Outside Edge Profiles are available.
- Width of solid wood edge will vary based on chosen Outside Edge Profile.
- Only available with **SR100GRF** S/R Profile.



Minimum Size: Varies based on chosen Outside Edge Profile. See Notes for more information.

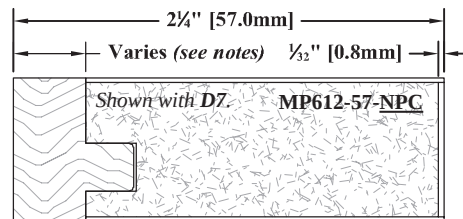EBT601 - Frame Only - NPC
(No-Panel Cut)

- Not all Outside Edge Profiles are available.
- Width of solid wood edge will vary based on chosen Outside Edge Profile.
- Only available with **MP612-57-NPC** or **MP612-76-NPC** Stile/Rail Profile.




Minimum Size: Varies based on chosen Outside Edge Profile. See Notes for more information.

Continued on next page...


► For PRICING ► See Section [B.10](#) in our current Wholesale Pricing Catalog.

EBT701 Family (Solid Wood Edge - Hand Applied)

EBT701

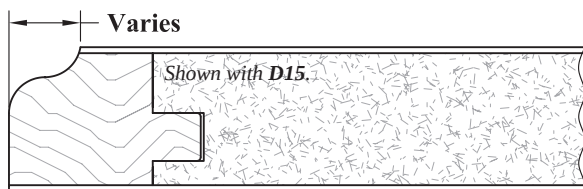


- Not all Outside Edge Profiles are available.
- Width of solid wood edge will vary based on chosen Outside Edge Profile.




Minimum Size: Varies based on chosen Outside Edge Profile. See Notes for more information.


EBT701 - Frame Only

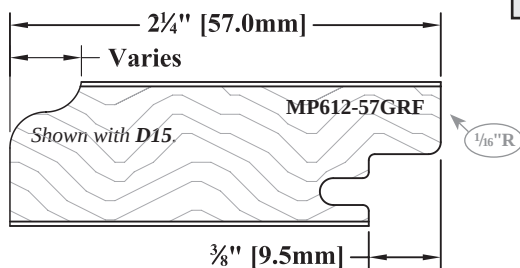


- Not all Outside Edge Profiles are available.
- Only available with **MP612-57GRF** or **MP612-76GRF** Stile/Rail Profile.



Minimum Size: 6" x 6" [152.4mm x 152.4mm] after edgebanding.

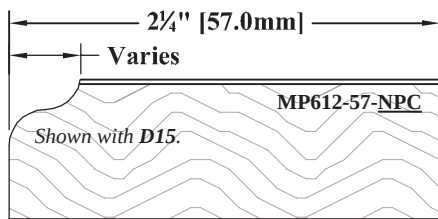EBT701 - Frame Only - NPC
(No-Panel Cut)

- Not all Outside Edge Profiles are available.
- Only available with **MP612-57-NPC** or **MP612-76-NPC** Stile/Rail Profile.




Minimum Size: 6" x 6" [152.4mm x 152.4mm] after edgebanding.


Continued on next page...

► For PRICING ► See Section [B.10](#) in our current Wholesale Pricing Catalog.

EBT100 (Raw Edge)



- Only available with Applied Molding Outside Edge profiles for 1/16" thick Veneered & Edgebanded doors.




Minimum Size: 3" x 3" [76.2mm x 76.2mm]


See following pages for available Applied Molding Outside Edge Profiles.

EBT101 (Raw Edge)

EBT101

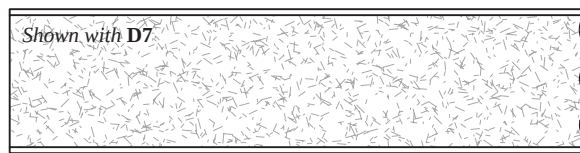


- Available with a D7 Outside Edge Profile or available with Applied Molding Outside Edge profiles for 3/4" thick or 1" thick Veneered & Edgebanded doors.




Minimum Size: 3" x 3" [76.2mm x 76.2mm]

EBT101 - Frame Only

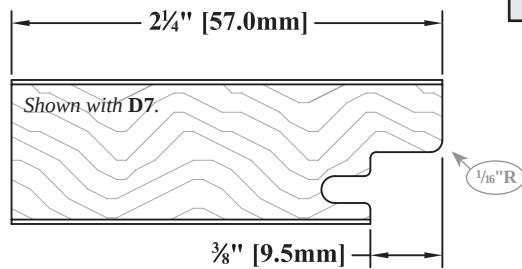


- Available with a D7 Outside Edge Profile or available with Applied Molding Outside Edge profiles for 3/4" thick or 1" thick Veneered & Edgebanded doors.
- Only available with SR100GRF S/R Profile.




Minimum Size: 6 3/8" x 6" [168.3mm x 152.4mm] after edgebanding.

EBT101 - Frame Only - NPC (No-Panel Cut)

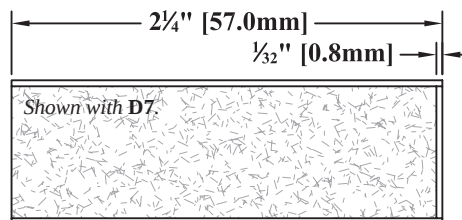

- Available with a D7 Outside Edge Profile or available with Applied Molding Outside Edge profiles for 3/4" thick or 1" thick Veneered & Edgebanded doors.

- Only available with MP612-57-NPC or MP612-76-NPC Stile/Rail Profile.




Minimum Size: 6" x 6" [152.4mm x 152.4mm] after edgebanding.

See following pages for available Applied Molding Outside Edge Profiles.


Continued on next page...

► For PRICING ► See Section [B.10](#) in our current Wholesale Pricing Catalog.


Applied Molding Outside Edges for 1/16" Thick Veneered & Edgebanded Doors with EBT100




PC: AM103 Multiplier: .70
No Hinge Boring Available




PC: AM103 Multiplier: .70
No Hinge Boring Available



PC: AM103 Multiplier: .70
No Hinge Boring Available




PC: AM103 Multiplier: .70
No Hinge Boring Available




PC: AM103 Multiplier: .70
No Hinge Boring Available



PC: AM103 Multiplier: .70
No Hinge Boring Available




PC: AM103 Multiplier: .82
No Hinge Boring Available




PC: AM103 Multiplier: .70
No Hinge Boring Available



PC: AM103 Multiplier: .70
No Hinge Boring Available




PC: AM101 Multiplier: .70
No Hinge Boring Available




PC: AM103 Multiplier: .70
No Hinge Boring Available




PC: AM101 Multiplier: .70
No Hinge Boring Available




PC: AM103 Multiplier: .80
No Hinge Boring Available



PC: AM101 Multiplier: .70
No Hinge Boring Available



PC: AM101 Multiplier: .70
No Hinge Boring Available




PC: AM103 Multiplier: .70
No Hinge Boring Available


Continued on next page...

► For PRICING ► See Section [B.10](#) in our current Wholesale Pricing Catalog.

Applied Molding Outside Edges for 3/4" Thick Veneered & Edgebanded Doors with EBT101 Family

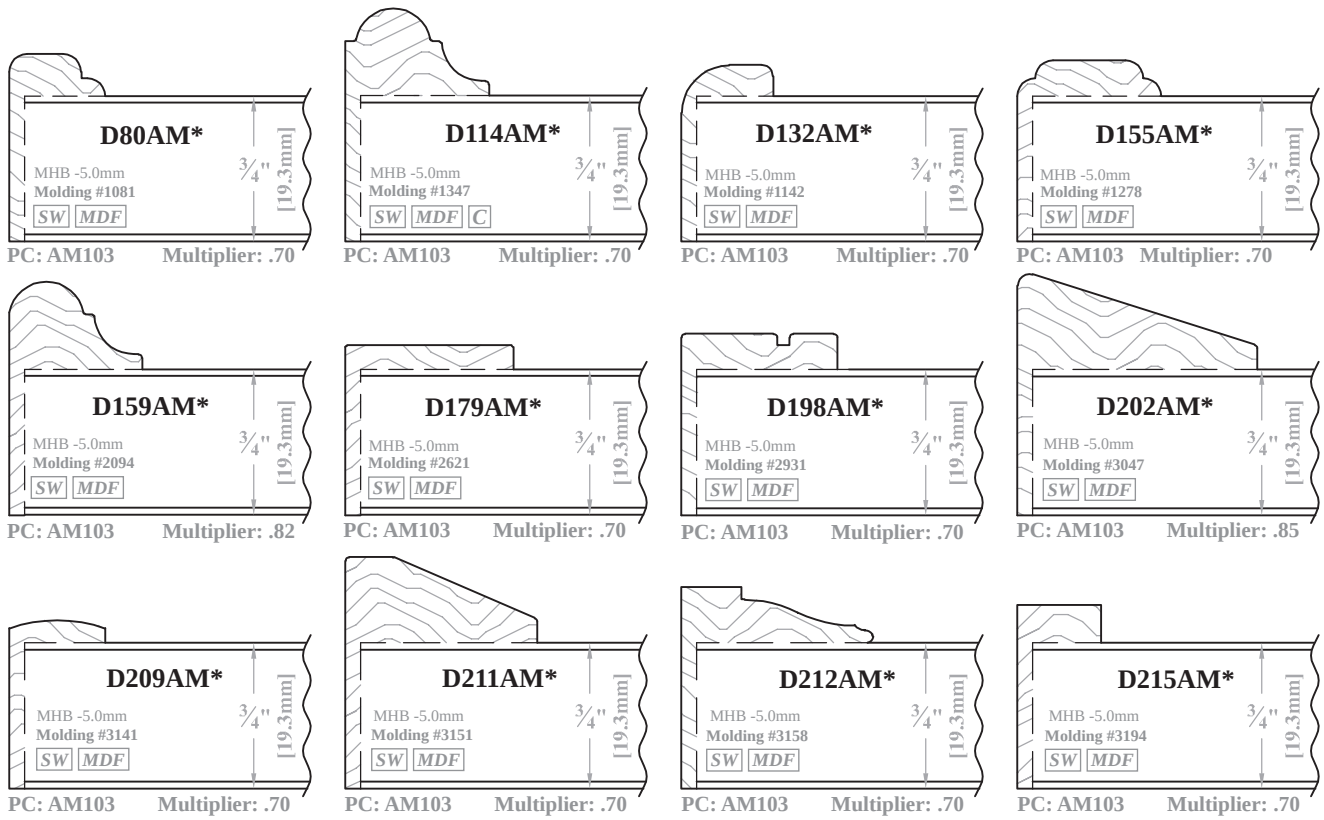


Applied Molding Outside Edges for 1" Thick Veneered & Edgebanded Doors with EBT101 Family

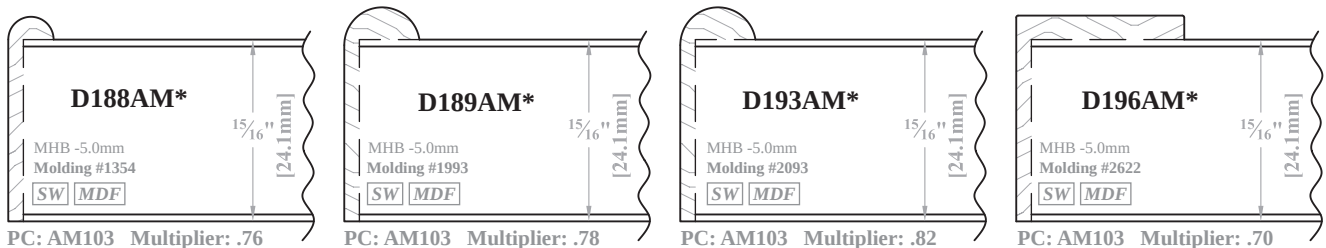

Continued on next page...


► For PRICING ► See Section [B.10](#) in our current Wholesale Pricing Catalog.

EBT102 (Wood Veneer Edge - Machine Applied)

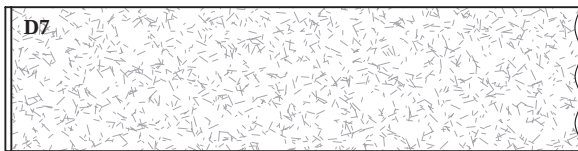

- Raw MDF or MDF-MR, with veneer edgebanding on 4 edges.
- Only available with **D7** Outside Edge Profile.

This edgebanding option is recommended when a SolidTone® finish will be applied on raw MDF/MDF-MR doors and drawer fronts with a **D7** outside edge profile. Minimum Size: 3" x 3" [76.2mm x 76.2mm].




EBT103 (1/8" [3.2mm] Solid Wood Edge - Machine Applied)



- Raw MDF or MDF-MR, with 1/8" solid wood edgebanding on 4 edges.
- Only available with **D7, D33, D66, D147** Outside Edge Profiles.

This edgebanding option is recommended when a SolidTone® finish will be applied on MDF or MDF-MR doors and drawer fronts with a **D7** outside edge profile. Minimum Size: 3 1/4" x 3 1/4" [82.6mm x 82.6mm] after edgebanding.




Continued on next page...

► For PRICING ► See Section **B.10** in our current Wholesale Pricing Catalog.

Solid Wood Edgebanding Visible from Face of Door: EBT202, EBT501, EBT601


Face Veneer Grain/Cut	Edgeband Grain/Cut from Face	Edgeband Grain/Cut from Edge
Plain Sliced (PS) Veneer	Plain Sawn (PS) Solid Wood	Quarter Sawn (QS) Solid Wood
Rotary Cut (RC) Veneer	Plain Sawn (PS) Solid Wood	Quarter Sawn (QS) Solid Wood
Quarter Sawn (QS) Veneer	Quarter Sawn (QS) Solid Wood	Plain Sawn (PS) Solid Wood
Straight Grain (SG) Veneer	Straight Grain (SG) Solid Wood	Plain Sawn (PS) Solid Wood

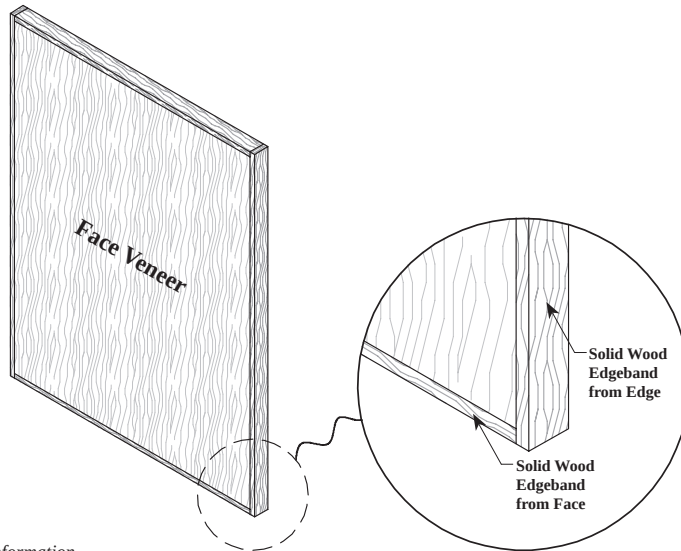

*See **Wood Species Options** note for more information.

Solid Wood Edgebanding Not Visible from Face of Door: EBT701

Face Veneer Grain/Cut	Edgeband Grain/Cut from Face	Edgeband Grain/Cut from Edge
Plain Sliced (PS) Veneer	N/A	Quarter Sawn (QS) Solid Wood
Rotary Cut (RC) Veneer	N/A	Quarter Sawn (QS) Solid Wood
Quarter Sawn (QS) Veneer	N/A	Plain Sawn (PS) Solid Wood
Straight Grain (SG) Veneer	N/A	Plain Sawn (PS) Solid Wood

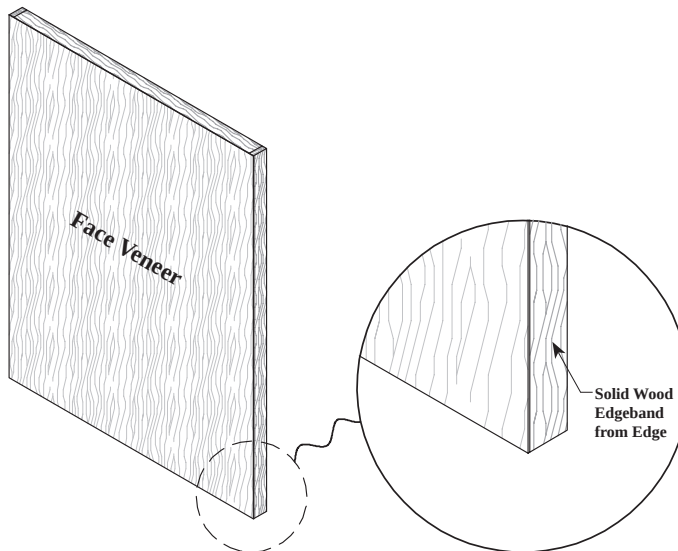

*See **Wood Species Options** note for more information.

Continued on next page...

► For PRICING ► See Section **B.10** in our current Wholesale Pricing Catalog.

Ordering & Pricing Notes: Style 60 Veneered & Edgebanded Doors & Drawer Fronts

Ordering Guidelines

1	Order Forms	Please use <i>Veneered & Edgebanded Door and Drawer Front Order Form (E•Z Form #7)</i> .
---	-------------	--

Pricing

1	Pricing	Please see Section B.10 of our current Wholesale Pricing Catalog .
---	---------	--

Technical Notes: Style 60 Veneered & Edgebanded Doors & Drawer Fronts

Cabinet Door & Drawer Front Options (Chapter B)

1	Frame Only Doors	Not available with mullion lite patterns.
		Not available with center stiles or rails.
		GRF cut is designed to accept our rubber glass retainer. See Section B.12 for more information.

Convex/Concave Options (Chapter D)

1	Available Products	The  indicates that this product is available convex/concave. • EBT201 is the only edgeband treatment option available. • Frame only doors not available convex/concave.
2	Edgebanding	In the case of convex/concave doors and drawer fronts, the edgebanding will be hand applied. Lineal grain direction on the top and bottom edge of a convex/concave door will run in a straight line. • The grain will not follow the radius.

Dealer Aid Options (Chapter T)

1	Finished Color Blocks	See Dealer Aid Section T.1 for finished color samples.
---	-----------------------	---

Design Options (Chapter G)

1	Grain and Color Coordination	Grain and Color Coordination is an option for veneer doors. • WalzCraft only offers this option in conjunction with EBT201. • EBT201 Frame Only doors are not available with Grain and Color Coordination. • Please see Section G.17 for more information.
---	------------------------------	--

Finish Options (Chapter R)

1	Rub Through	EBT701 is the only option that allows Rub Through. • Please see Section R.4 for more information on our Rub Through options.
2	SolidTone®	Certain Edgeband Treatment options are recommended when a SolidTone® finish will be applied on MDF or MDF-MR doors and drawer fronts with a D7 outside edge profile. • See EBT102 and EBT103 notes.

Functional Options (Chapter F)

1	Finger Pull Routs FP100 & FP200	Only available with the EBT101 and EBT701. • When using the EBT701, the edgeband width must be at least ½" [12.7mm].
2	Hinge Boring	Hinge boring is available for Style 60 Veneered & Edgebanded doors & drawer fronts. • Please see Section F.1 for additional hinge boring requirements, ordering instructions and compatibility.
3	Finger Pull Moldings	Finger Pull Moldings can only be used with EBT options if using a D7 outside edge profile. Not all EBT options are compatible. Please see the EBT - Fingerpull Molding Compatibility chart on our website: Resources > Technical Information > Compatibility Charts .

General Information (Chapter A)

1	Grain Direction	Arrows(↔) throughout the catalog indicate standard grain direction. • Grain direction may be specified at NO additional cost (includes frame only door).
2	Horizontal Grain	If your project is being ordered with Horizontal grain and there are multiple doors and/or drawer fronts adjacent to each other, WalzCraft strongly suggests that you consider using our Grain and Color Coordination option. Please supply WalzCraft with a drawing or sketch of how the doors and drawer fronts are arranged on your project. WalzCraft will review the material requirements and prepare a quote. Please see Section G.17 for more information.
3	Ready to Assemble	Ready to Assemble (RTA) is not an option.

Continued on next page...

► For PRICING ► See Section **B.10** in our current Wholesale Pricing Catalog.

Technical Notes: Style 60 Veneered & Edgebanded Doors & Drawer Fronts...continued

Material Options

1	Hardwood Veneer	"A" grade (wood back) hardwood veneer on the face with a #1 grade (wood back) veneer on the back.
2	MDF Core	MDF material is visible on the outside edge profile, if left raw (EBT101). • This will generally appear darker than the face or back of the door when pre-finished.
3	Combi-Core	¾" thick Style 60 doors and drawer fronts are also available with a Combi-Core. • See Section K.1 for more information on Combi-Core. • Available with all EBT options for ¾" thickness. • Not available with pre-applied veneer. • Frame-only options will still be made from solid wood.
4	Reconstituted Veneer	See Section B.11 for Style 60 doors using Architectural Grade Reconstituted Veneers .

Miscellaneous

1	EB Application Sequence	WalzCraft applies the edgebanding to the four edges in the following order: Top, Bottom, Left, Right.
2	Edgeband Grain Direction	WalzCraft applies the wood veneer edgebanding in a Lineal direction.

Profile Options (Chapter E)

1	EBT100	Wood veneer on face and back, ⅝" [14.5mm] thick only. EBT100 is only available when using one of the following Applied Molding Outside Edge profiles for ⅝" thick Veneered & Edgebanded doors: D68AM, D94AM, D99AM, D100AM, D111AM, D113AM, D121AM, D122AM, D136AM, D142AM, D150AM, D171AM, D173AM, D177AM, D197AM, D206AM .
2	EBT101	Slab: Raw edge, wood veneer on face and back. Available with a D7 outside edge profile (Section E.15). Frame Only: Raw edge, solid wood frame with veneer on the face and back. Available with a D7 Outside Edge profile. Only available with SR100GRF Stile/Rail profile. Frame Only-NPC: Raw edge, MDF frame with veneer on the face and back. Available with a D7 Outside Edge profile. Only available with MP612-57-NPC or MP612-76-NPC Stile/Rail profiles. EBT101 is also available with the following Applied Molding Outside Edge profiles for ¾" thick Veneered & Edgebanded doors: D80AM, D114AM, D132AM, D155AM, D159AM, D179AM, D198AM, D202AM, D209AM, D211AM, D212AM, D215AM . EBT101 is available 1" thick only when using one of the following Applied Molding Outside Edge profiles for 1" thick Veneered & Edgebanded doors: D188AM, D189AM, D193AM, D196AM . See notes for Sizes/Dimensions - Thickness for actual finished thickness.
3	EBT102	Maple wood veneer edgebanding, machine applied to a raw MDF panel. No veneer on face or back. Only available with a D7 Outside Edge profile. This edgebanding option is recommended when a SolidTone® finish will be applied on raw MDF or MDF-MR doors and drawer fronts with a D7 outside edge profile.
4	EBT103	⅛" [3.2mm] solid maple edgebanding, butt joinery at corners, machine applied to a raw MDF panel. No veneer on face or back. Only available with the following standard Outside Edge profiles from Section E.15 : D7, D33, D66, D147 . This edgebanding option is recommended when a SolidTone® finish will be applied on raw MDF or MDF-MR doors and drawer fronts with a D7 outside edge profile.
5	EBT201	Slab: Wood veneer edgebanding, machine applied to a panel with veneer on the face and back. Only available with a D7 Outside Edge profile. Frame Only: Wood veneer edgebanding, machine applied to a solid wood frame with veneer on the face and back. Only available with a D7 Outside Edge profile. Only available with SR100GRF Stile/Rail profile. Frame Only-NPC: Wood veneer edgebanding, machine applied to an MDF frame with veneer on the face and back. Only available with a D7 Outside Edge profile. Only available with MP612-57-NPC or MP612-76-NPC Stile/Rail profiles.
6	EBT202	Slab: ⅛" [3.2mm] solid wood edge, butt joinery at corners, machine applied to panel with veneer on the face & back. Only available with the following standard Outside Edge profiles from Section E.15 : D7, D33, D66, D147 . Frame Only: ⅛" [3.2mm] solid wood edge, butt joinery at corners, machine applied to solid wood frame with veneer on the face & back. Only available with the following standard Outside Edge profiles from Section E.15 : D7, D33, D66, D147 . Only available with SR100GRF Stile/Rail profile. Frame Only-NPC: ⅛" [3.2mm] solid wood edge, butt joinery at corners, machine applied to an MDF frame with veneer on the face & back. Only available with the following standard Outside Edge profiles from Section E.15 : D7, D33, D66, D147 . Only available with MP612-57-NPC or MP612-76-NPC Stile/Rail profiles.

Continued on next page...

Technical Notes: Style 60 Veneered & Edgebanded Doors & Drawer Fronts...continued

Profile Options (Chapter E)...continued

11	EBT501	Slab: Solid wood edge of variable width, butt joinery at corners, hand applied (tongue & groove joint) to a panel with veneer on the face and back.
		Frame Only: Solid wood edge of variable width, butt joinery at corners, hand applied (tongue & groove joint) to a solid wood frame with veneer on the face and back. Only available with SR100GRF Stile/Rail profile.
		Frame Only-NPC: Solid wood edge of variable width, butt joinery at corners, hand applied (tongue & groove joint) to an MDF frame with veneer on the face and back. Only available with MP612-57-NPC or MP612-76-NPC Stile/Rail profiles.
		Width of solid wood edge varies from $\frac{3}{8}$ " [9.5mm] to a maximum of $1\frac{1}{4}$ " [31.8mm], in $\frac{1}{8}$ " [3.2mm] increments and is determined by your chosen outside edge profile. • Standard width is $\frac{3}{8}$" [9.5mm]. • Available with all standard Outside Edge profiles from Section E.15 except: D72, D138, D152. • For your reference, you can also access the Profile Reveal Widths chart on our website: Resources > Technical Information > Technical Information.
12	EBT601	Slab: Solid wood edge of variable width, with mitered corners, hand applied (tongue & groove joint) to a panel with veneer on the face and back.
		Frame Only: Solid wood edge of variable width, with mitered corners, hand applied (tongue & groove joint) to a solid wood frame with veneer on the face and back. Only available with SR100GRF Stile/Rail profile.
		Frame Only-NPC: Solid wood edge of variable width, with mitered corners, hand applied (tongue & groove joint) to an MDF frame with veneer on the face and back. Only available with MP612-57-NPC or MP612-76-NPC Stile/Rail profiles.
		Width of solid wood edge varies from $\frac{3}{8}$ " [9.5mm] to a maximum of $1\frac{1}{4}$ " [31.8mm], in $\frac{1}{8}$ " [3.2mm] increments and is determined by the chosen outside edge profile. • Standard width is $\frac{3}{8}$" [9.5mm]. • Available with all standard Outside Edge profiles from Section E.15 except: D72, D138, D152. • For your reference, you can also access the Profile-Reveal Widths chart on our website: Resources / Technical Information > Technical Information.
13	EBT701	Slab: Solid wood edge of variable width, with mitered corners, hand applied (tongue & groove joint) to a raw MDF panel. • Face and back veneer is applied after edgebanding. • Width of the solid wood edge will equal the outside edge profile width + $\frac{1}{8}$" [3.2mm]. ◦ Minimum width of $\frac{3}{4}$" [19.1mm] wide (does not include tongue & groove joint). ◦ Maximum width of $1\frac{1}{4}$" [31.8mm] wide (does not include tongue & groove joint). • Minimum size for raw MDF panel before applying solid wood edge is 3" x 3" [76.2mm x 76.2mm].
		Frame Only: Solid wood frame with mitered corners. Face and back veneer is applied after frame is assembled. Only available with MP612-57GRF or MP612-76GRF Stile/Rail profile.
		Frame Only-NPC: Solid wood frame with mitered corners. Face and back veneer is applied after frame is assembled. Only available with MP612-57-NPC or MP612-76-NPC Stile/Rail profile.
		Due to the shape of the profile where the solid wood edge meets the veneer face, not all outside edge profiles are available. • For compatible outside edge profiles, please see the Outside Edge Profile Compatibility chart on our website: Resources > Technical Information > Compatibility Charts.

Continued on next page...

► For PRICING ► See Section [B.10](#) in our current Wholesale Pricing Catalog.

Technical Notes: Style 60 Veneered & Edgebanded Doors & Drawer Fronts...continued

Sizes/Dimensions


1	Thicknesses	5/16" Style 60: Available only when using EBT100 and one of the compatible Applied Molding Outside Edge profiles for 5/16" thick Veneered & Edgebanded doors. • 5/16" Style 60 doors will finish at .572" [14.5mm] thick +/- .030". • Not available with Pre-Applied veneer.
		3/4" Style 60: Available with all EBT options, including frame only doors, except EBT100. • Includes raw MDF-MR for EBT102 and EBT103. • Also available with EBT101 and one of the compatible Applied Molding Outside Edge profiles for 3/4" thick Veneered & Edgebanded doors. • 3/4" Style 60 doors will finish at .759" [19.3mm] thick +/- .030".
		1" Style 60: Available when using any of the following solid wood edged EBT options: EBT202, EBT501, EBT601, EBT701 (includes frame only doors). • Also available with EBT101 and one of the compatible Applied Molding Outside Edge profiles for 1" thick Veneered & Edgebanded doors. • 1" Style 60 doors will finish at 0.947" [24.1mm] thick +/- .030". • Not available with Pre-Applied veneer.
2	Maximum Size	Vertical Grain = 48"W x 96"H [1219.2mm x 2438.4mm].
		Horizontal Grain = 96"W x 48"H [2438.4mm x 1219.2mm].
		The maximum width for Style 60 doors/drawer fronts that WalzCraft will warrant is 24". The maximum height for Style 60 doors/drawer fronts that WalzCraft will warrant is 72". • Sizes greater than this will carry no warranty against warping or twisting. • See Section A.8 for more information on warping and twisting tolerances.

Wood Species Options (Chapter S)


1	EBT102, EBT201, EBT201-F	Not all veneer used for the face and back of these doors have a matching veneer edgeband species. Please see Edgebanding Species for EBT Style 60 chart on our website under Resources > Technical Information > Technical Information to find which species of veneer edgebanding will be used with the various species of face/back veneer.
2	Solid Wood Edgebanding	Due to the nature of solid wood, when preparing a piece of solid wood edgebanding to apply to the edge of a door, the face and back surfaces of the individual solid wood piece will have a plain sawn grain pattern, and the remaining surfaces of the piece (at a 90° angle to the face and back), will have a different grain pattern, such as quarter sawn or straight grain. • See earlier page within this section for images of the orientation of that piece of edgebanding in relation to the face veneer on the door. This will show you which grain pattern will be visible from the face of the completed door and which grain pattern will be visible from the edge of the completed door.

Veneered & Edgebanded - Standard Veneer - END


► For PRICING ► See Section [B.10](#) in our current Wholesale Pricing Catalog.

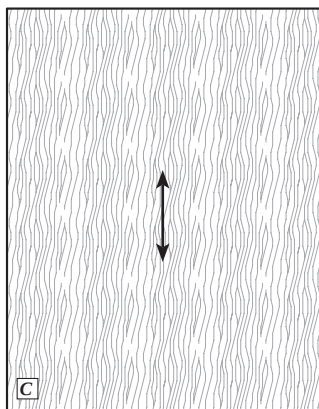

Style: 60
PC: See EBT Options

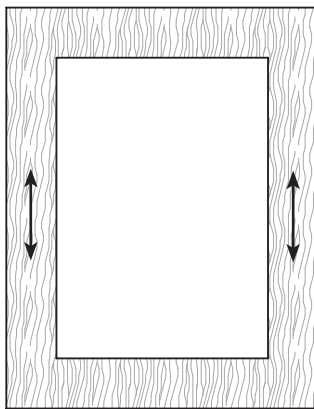

Style: 60F Frame Only
PC: See EBT Options




Style: 60 Drawer Front
PC: See EBT Options


EBT201-R Family (Wood Veneer Edge - Machine Applied)

EBT201-R

→ 1/32" [0.6mm]

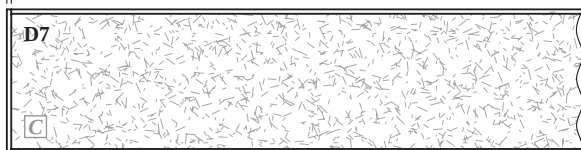


- Only available with **D7** Outside Edge Profile.




Minimum Size: 3" x 3" [76.2mm x 76.2mm] after edgebanding.

EBT201-R - Frame Only

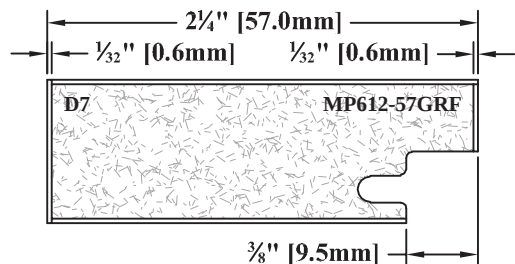


- Only available with **D7** Outside Edge Profile.
- Only available with **MP612-57GRF** or **MP612-76GRF** Stile/Rail Profile.




Minimum Size: 6" x 6" [152.4mm x 152.4mm] after edgebanding.

EBT201-R - Frame Only - NPC

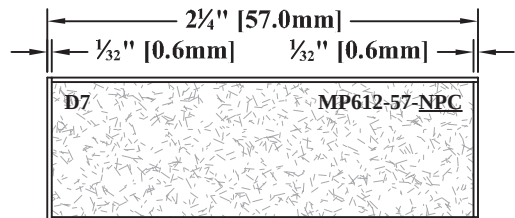

- Only available with **D7** Outside Edge Profile.
- Only available with **MP612-57-NPC** or **MP612-76-NPC** Stile/Rail Profile.




Minimum Size: 6" x 6" [152.4mm x 152.4mm] after edgebanding.

Continued on next page...


► For PRICING ► See Section [B.11](#) in our current Wholesale Pricing Catalog.

EBT101-R (*Raw Edge*)

B



- Only available with **D7** Outside Edge Profile.



Minimum Size: 3" x 3" [76.2mm x 76.2mm]

Continued on next page...

► For PRICING ► See Section [B.11](#) in our current Wholesale Pricing Catalog.

Ordering & Pricing Notes: Veneered & Edgebanded - Reconstituted Veneer

Ordering Guidelines

- | | | |
|---|-------------|--|
| 1 | Order Forms | Please use <i>Veneered & Edgebanded Door and Drawer Front Order Form (E•Z Form #7)</i> . |
|---|-------------|--|

Pricing

- | | | |
|---|---------|--|
| 1 | Pricing | Please see <i>Section B.11</i> of our current <i>Wholesale Pricing Catalog</i> . |
|---|---------|--|

Technical Notes: Veneered & Edgebanded - Reconstituted Veneer

Cabinet Door & Drawer Front Options (Chapter B)

- | | | |
|---|------------------|--|
| 1 | Frame Only Doors | Not available with mullion lite patterns. |
| | | Not available with center stiles or rails. |
| | | GRF cut is designed to accept our rubber glass retainer. See <i>Section B.12</i> for more information. |

Convex/Concave Options (Chapter D)

- | | | |
|---|--------------------|---|
| 1 | Available Products | The  indicates that this product is available convex/concave. <ul style="list-style-type: none"> • EBT201-R is the only edgeband treatment option available. • Frame only doors are not available convex/concave. |
| 2 | Edgebanding | In the case of convex/concave doors and drawer fronts, the edgebanding will be hand applied. |
| | | Lineal grain direction on the top and bottom edge of a convex/concave door will run in a straight line. <ul style="list-style-type: none"> • The grain will not follow the radius. |

Dealer Aid Options (Chapter T)

- | | | |
|---|-----------------------|---|
| 1 | Unfinished Sample Set | Set includes one unfinished 3½" x 5¼" [92.1mm x 133.4mm] paper back Reconstituted veneer sample in each of our available wood species. See <i>Dealer Aids Section T.1</i> . |
| 2 | Finished Color Blocks | See <i>Dealer Aid Section T.1</i> for finished color samples. |

Design Options (Chapter G)

- | | | |
|---|----------------------------|--|
| 1 | Grain & Color Coordination | Grain and Color Coordination is an option for veneer doors. <ul style="list-style-type: none"> • WalzCraft only offers this option in conjunction with EBT201-R. • EBT201-R Frame Only doors are <u>not</u> available with Grain and Color Coordination. • Please see <i>Section G.17</i> for more information. |
|---|----------------------------|--|

Functional Options (Chapter F)

- | | | |
|---|----------------------|---|
| 1 | Hinge Boring | Hinge boring is available for Style 60 Veneered & Edgebanded - Reconstituted Veneer doors & drawer fronts. <ul style="list-style-type: none"> • Please see <i>Section F.1</i> for additional hinge boring requirements, ordering instructions and compatibility. |
| 2 | Finger Pull Moldings | Finger Pull Moldings <i>can only be used</i> with EBT options if using a D7 outside edge profile. |
| | | Not all EBT options are compatible. Please see the EBT - Fingerpull Molding Compatibility chart on our website: Resources > Technical Information > Compatibility Charts . |

General Information (Chapter A)

- | | | |
|---|-------------------|---|
| 1 | Grain Direction | Arrows (↔) throughout the catalog indicate standard grain direction. Grain direction may be specified at NO additional cost (includes frame only doors). |
| 2 | Horizontal Grain | If your project is being ordered with Horizontal grain and there are multiple doors and/or drawer fronts adjacent to each other, WalzCraft strongly suggests that you consider using our Grain and Color Coordination option. Please supply WalzCraft with a drawing or sketch of how the doors and drawer fronts are arranged on your project. WalzCraft will review the material requirements and prepare a quote. Please see <i>Section G.17</i> for more information. |
| 3 | Ready to Assemble | Ready to Assemble (RTA) is <u>not</u> an option. |

Material Options

- | | | |
|---|----------------------|---|
| 1 | Reconstituted Veneer | Reconstituted Veneer (paper back) on face, back and edges. |
| 2 | MDF Core | MDF material is visible on the outside edge profile, if left raw (EBT101).
This will generally appear darker than the face or back of the door when pre-finished. |
| 3 | Combi-Core | ¾" thick Reconstituted Veneer Style 60 doors and drawer fronts are also available with a Combi-Core.
See <i>Section K.1</i> for more information on Combi-Core. <ul style="list-style-type: none"> • Available with all EBT options for ¾" thickness. • Not available with Frame-only options. |

Continued on next page...

► For PRICING ► See Section [B.11](#) in our current Wholesale Pricing Catalog.

*Technical Notes: Veneered & Edgebanded - Reconstituted Veneer...continued**Miscellaneous*

1	EB Application Sequence	WalzCraft applies the edgebanding to the four edges in the following order: Top, Bottom, Left, Right.
2	Edgeband Grain Direction	WalzCraft applies the wood veneer edgebanding in a Lineal direction.

Profile Options (Chapter E)


1	EBT101-R	Raw Edge, Reconstituted wood veneer on face and back of MDF panel. Only available with a D7 outside edge.
2	EBT201-R	Slab: Reconstituted wood veneer edgebanding, machine applied to an MDF panel with veneer on the face and back. Only available with a D7 outside edge. Frame Only: Reconstituted wood veneer edgebanding, machine applied to an MDF frame with veneer on the face and back. Mitered corners. Only available with a D7 outside edge. Only available with MP612-57GRF or MP612-76GRF Stile/Rail profile. If stile widths differ from rail widths, traditional mortise & tenon construction will be used. Frame Only-NPC: Reconstituted wood veneer edgebanding, machine applied to an MDF frame with veneer on the face and back. Mitered corners. Only available with a D7 outside edge. Only available with MP612-57-NPC or MP612-76-NPC Stile/Rail profile. If stile widths differ from rail widths, traditional mortise & tenon construction will be used.

Sizes /Dimensions


1	Thickness	Only available ¾" [19.3mm] thick (includes frame only doors).
2	Maximum Size	Vertical Grain = 48"W x 96"H [1219.2mm x 2438.4mm]. Horizontal Grain = 96"W x 48"H [2438.4mm x 1219.2mm]. The maximum width for Style 60 doors/drawer fronts that WalzCraft will warrant is 24". The maximum height for Style 60 doors/drawer fronts that WalzCraft will warrant is 72". • Sizes greater than this will carry no warranty against warping or twisting. • See Section A.8 for more information on warping and twisting tolerances.

Veneered & Edgebanded - Reconstituted Veneer - END


► For PRICING ► See Section [B.11](#) in our current Wholesale Pricing Catalog.

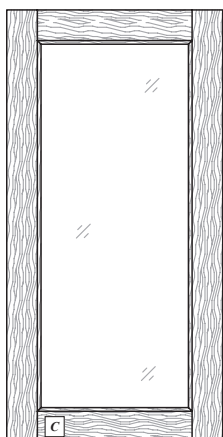


Style 10
Frame Door

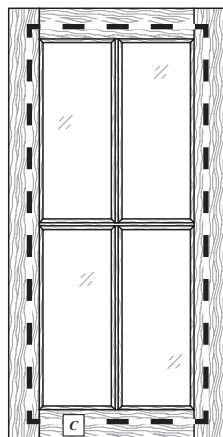


Style 10
LP001 - 4 Lites
2 wide x 2 high

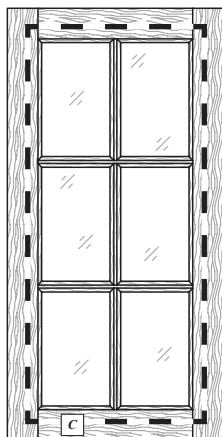


Style 10
LP001 - 6 Lites
2 wide x 3 high

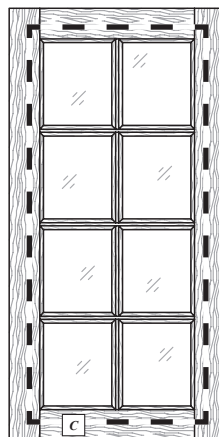


Style 10
LP001 - 8 Lites
2 wide x 4 high




Style 10
LP100 - 5 Lites

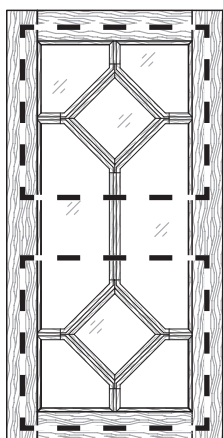


Style 10
LP100 - (2) Patterns
8 Lites

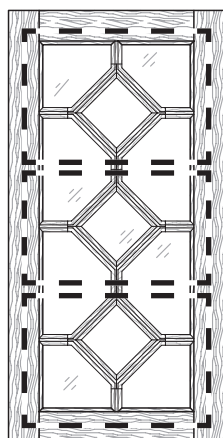


Style 10
LP100 - (3) Patterns
11 Lites

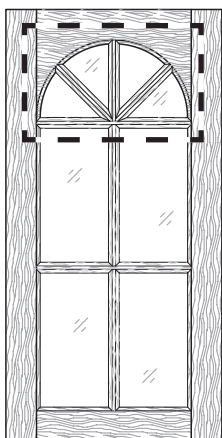


Style 1996
LP101 over 2wx2h Lites
8 Lites




Style 1996
LP102 over 3wx2h Lites
10 Lites

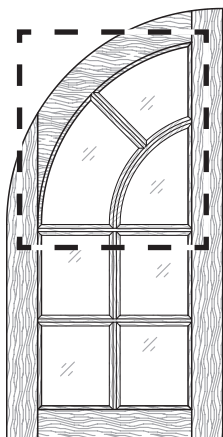


Style 995L
LP103 over 2wx2h Lites
7 Lites

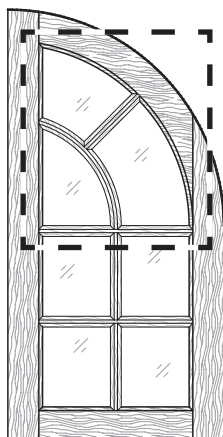

Style 995R
LP103 over 2wx2h Lites
7 Lites

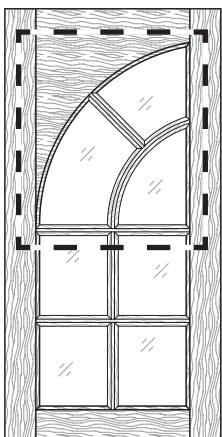

Style 996L
LP103 over 2wx2h Lites
7 Lites

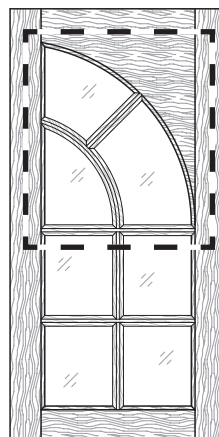


Style 996R
LP103 over 2wx2h Lites
7 Lites


► For PRICING ► See Section **B.12** in our current Wholesale Pricing Catalog.

Mullion Lite Pattern Options


B

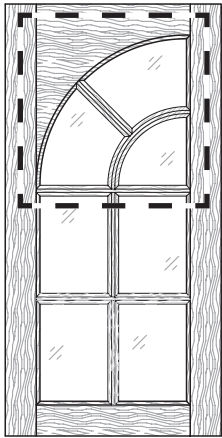


Style 997L
LP104 over 2wx2h Lites
7 Lites




Style 997R
LP104 over 2wx2h Lites
7 Lites




Style 10
LP105 - 7 Lites

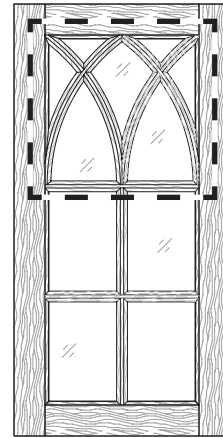


Style 10
LP105 over 2wx2h Lites
11 Lites

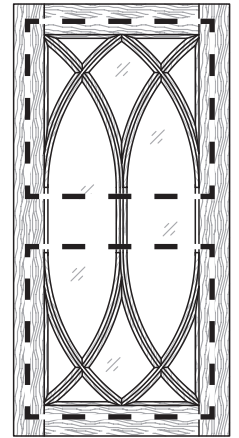


Style 10
LP105 - (2) Patterns
12 Lites

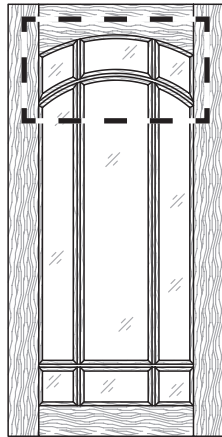


Style 2000
LP106 - 9 Lites

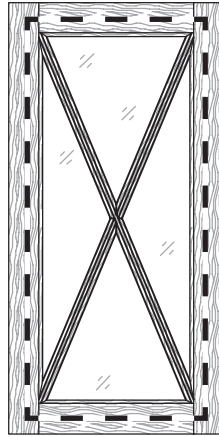


Style 10
LP107 - 4 Lites

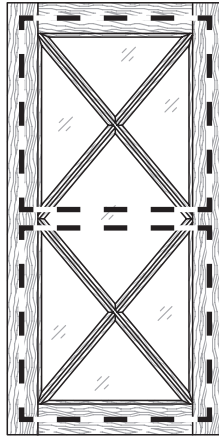


Style 10
LP107 - (2) Patterns
7 Lites

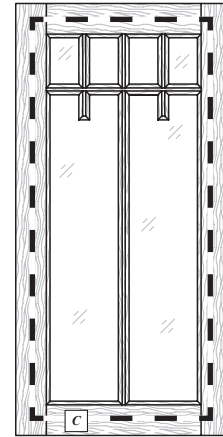


Style 10
LP108 - 6 Lites

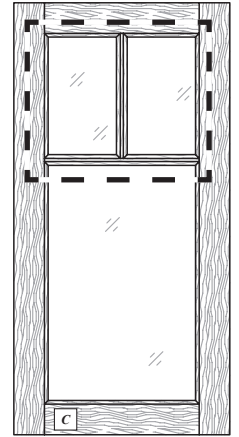


Style 10
LP109 - 3 Lites

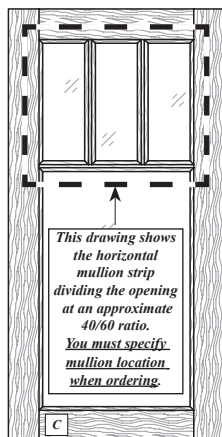


Style 10
LP109 - 4 Lites

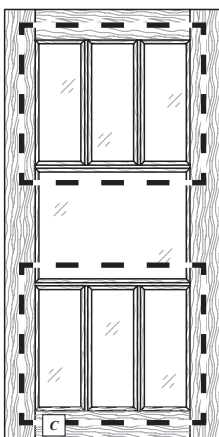


Style 10
LP109 - (2) Patterns
7 Lites

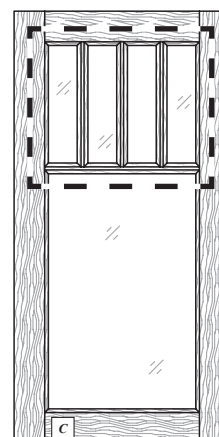

Style 10
LP109 - 5 Lites

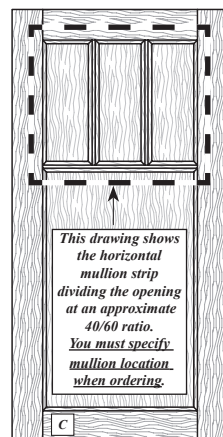


Style 40MUL
w/LP109 - 4 Lites

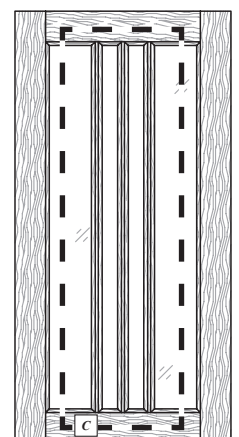


Style 10
LP110 - 4 Lites


► For PRICING ► See Section B.12 in our current Wholesale Pricing Catalog.

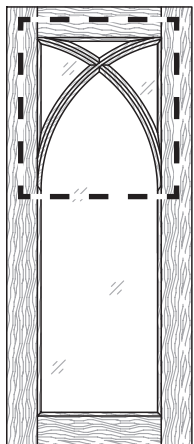


Style 10
LP111 - 4 Lites
(Drawn at: 12"W x 28"H)
[304.8mm x 711.2mm]

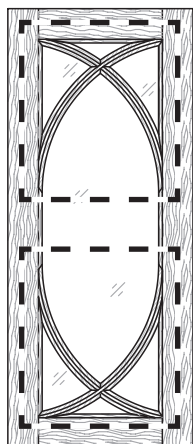


Style 10
LP111 - (2) Patterns
7 Lites
(Drawn at: 12"W x 28"H)
[304.8mm x 711.2mm]

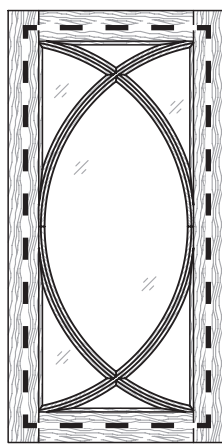


Style 10
LP112 - 7 Lites

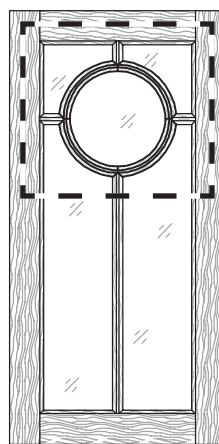


Style 10
LP113 - 5 Lites

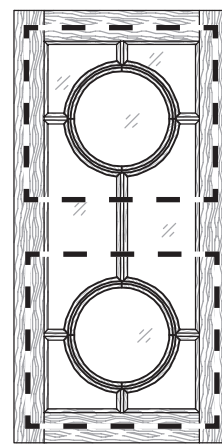


Style 10
LP113 - (2) Patterns
8 Lites

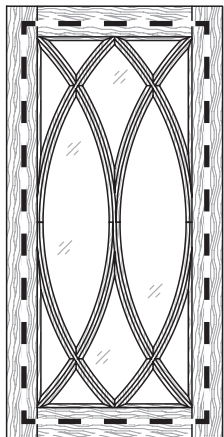


Style 10
LP114 - 12 Lites

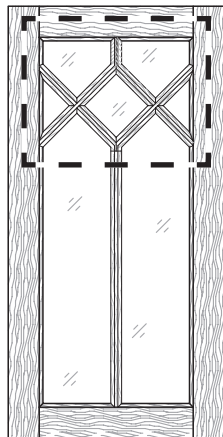


Style 10
LP115 - 7 Lites

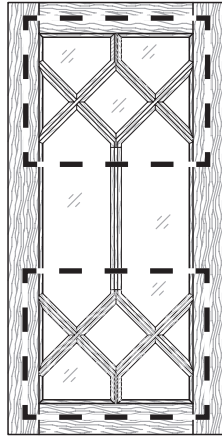


Style 10
LP115 - (2) Patterns
12 Lites

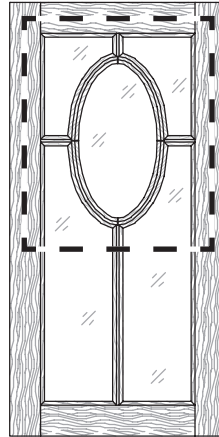


Style 10
LP116 - 5 Lites

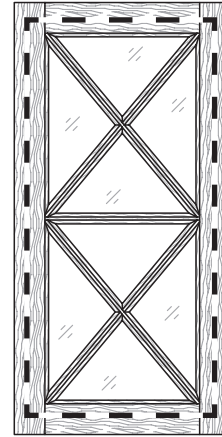


Style 10
LP117 - 8 Lites

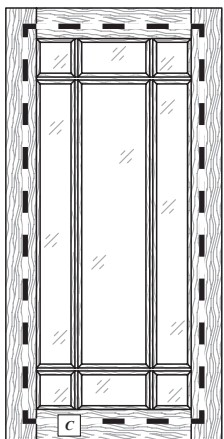


Style 10
LP118 - 9 Lites

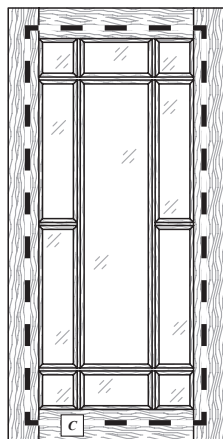


Style 10
LP118 - 11 Lites



Style 10
LP118 - 13 Lites



Style 10
LP119 - 3 Lites




Style 10
LP119 - (2) Patterns
5 Lites


► For PRICING ► See Section **B.12** in our current Wholesale Pricing Catalog.

Mullion Lite Pattern Options


B

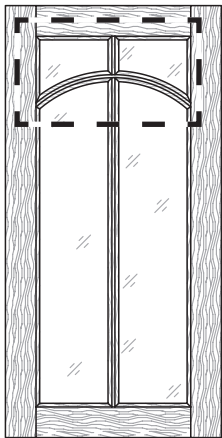


Style 10
LP120 - 4 Lites

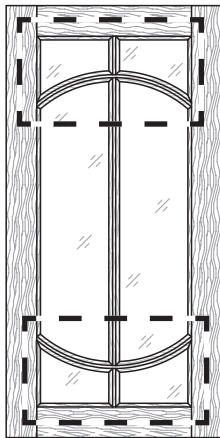


Style 10
LP120 - (2) Patterns
6 Lites

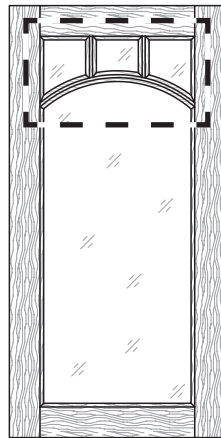


Style 10
LP121 - 4 Lites

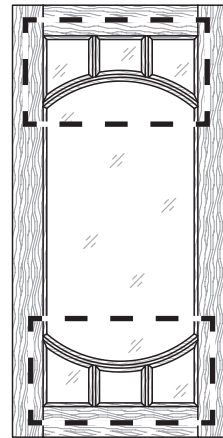


Style 10
LP121 - (2) Patterns
7 Lites

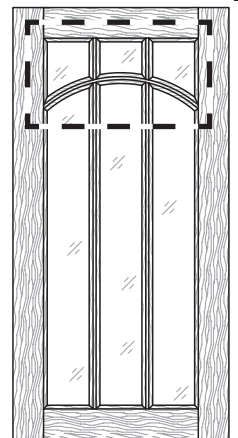


Style 10
LP122 - 6 Lites




Style 10
LP122 - (2) Patterns
9 Lites




Style 10
LP124 - 20 Lites




Style 10
LP125 - 3 Lites




Style 10 - LP125
(2) Patterns
5 Lites

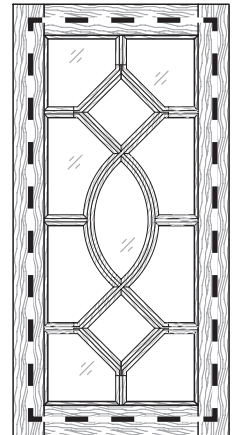


Style 10 - LP126
11 Lites




Style 10 - LP127
4 Lites




Style 10 - LP127
(2) Patterns
7 Lites



Style 10 - LP128
8 Lites

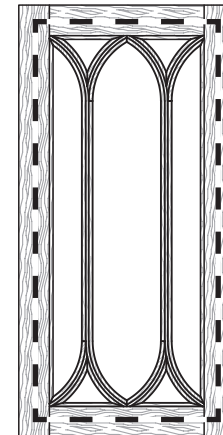


Style 10 - LP129
7 Lites

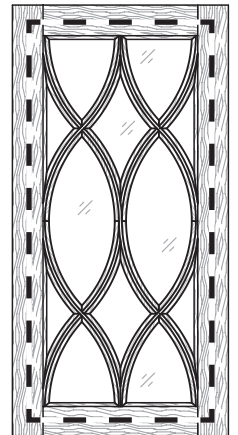


Style 10 - LP130
12 Lites


► For PRICING ► See Section B.12 in our current Wholesale Pricing Catalog.

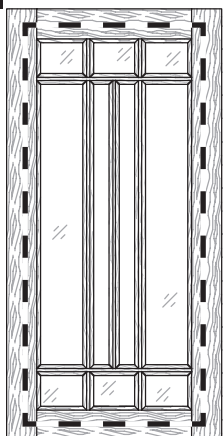


Style 10
LP131 - 10 Lites




Style 10
LP132 - 11 Lites




Style 10
LP133 - 5 Lites

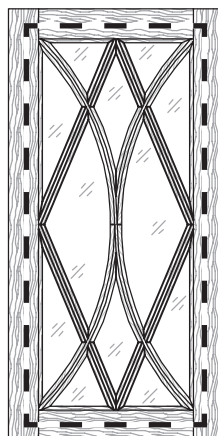


Style 10
LP134 - 12 Lites




Style 10
LP136 - 6 Lites

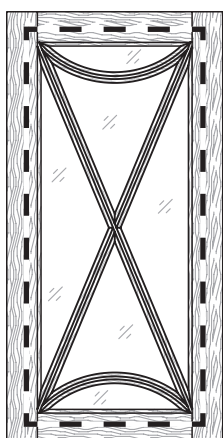


Style 10
LP137 - 6 Lites

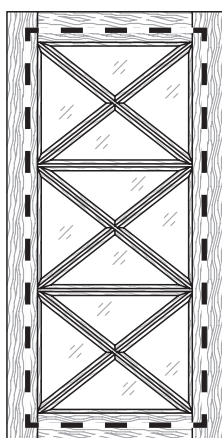


Style 10
LP138 - 12 Lites

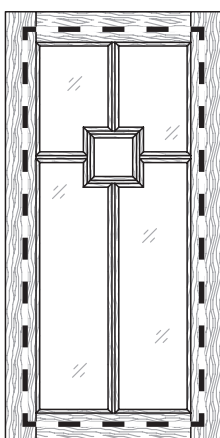


Style 10
LP139 - 5 Lites

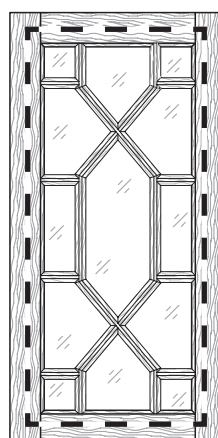


Style 10
LP140 - 13 Lites

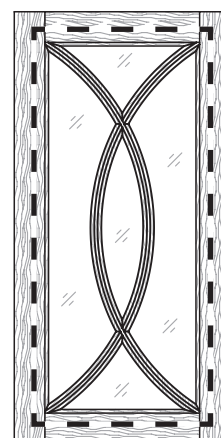


Style 10
LP141 - 5 Lites

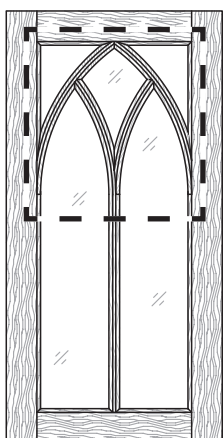


Style 10
LP142 - 5 Lites

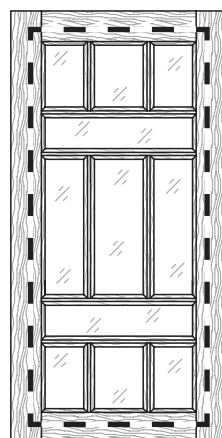


Style 10
LP143 - 11 Lites

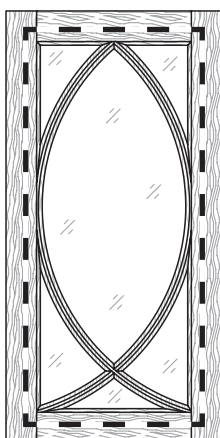

Style 10
LP144 - 6 Lites

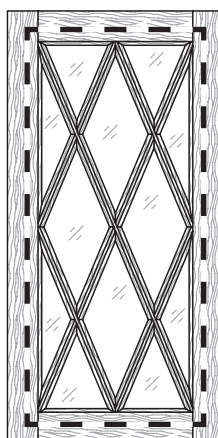

Style 10
LP145 - 12 Lites

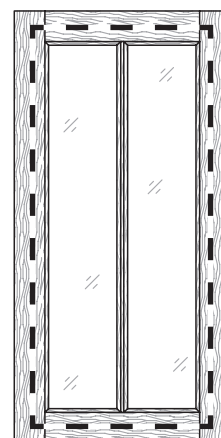


Style 10
LP146 - 2 Lites
2 wide x 1 high


► For PRICING ► See Section *B.12* in our current Wholesale Pricing Catalog.

Mullion Lite Pattern Options


B

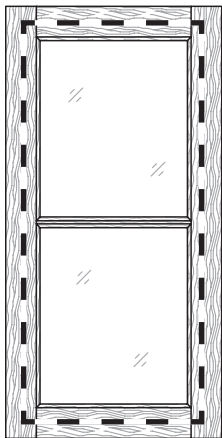


Style 10
LP147 - 2 Lites
1 wide x 2 high

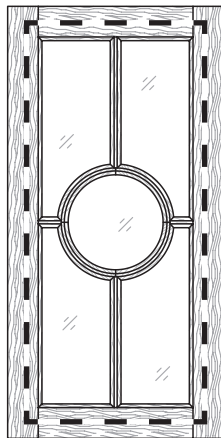


Style 10
LP148 - 5 Lites

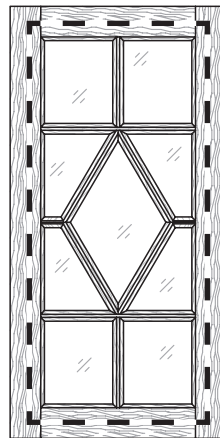


Style 10
LP149 - 9 Lites

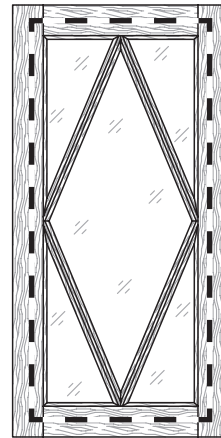


Style 10
LP150 - 5 Lites

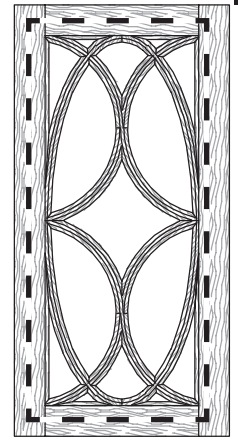


Style 10
LP151 - 15 Lites

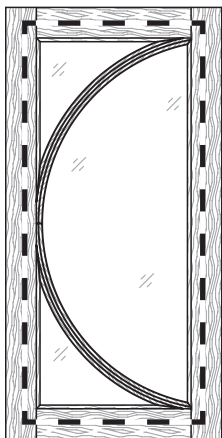


Style 10
LP152 - 3 Lites

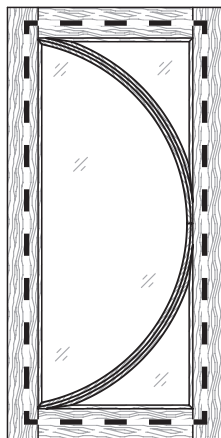

Style 10
LP153 - 3 Lites

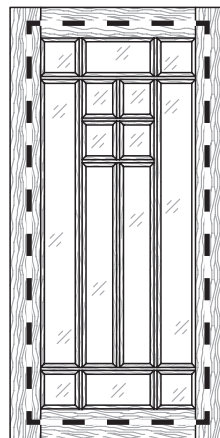


Style 10
LP154 - 14 Lites

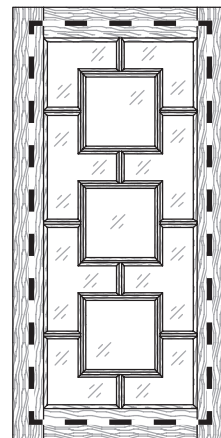


Style 10
LP155 - 11 Lites

LP123 Lite Pattern Configuration Options

**** Doors using the LP123 lite pattern are available from 12" to 24" wide in 1" increments. Please see Notes for more information. ****

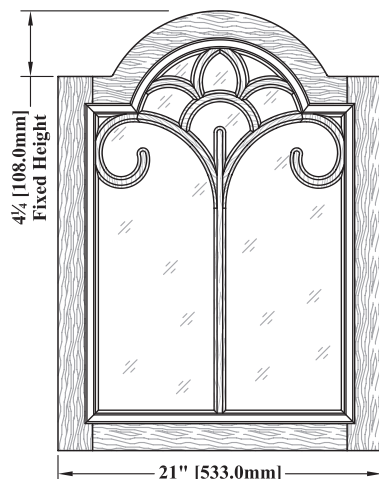

Style 3020
LP123 - 10 Lites

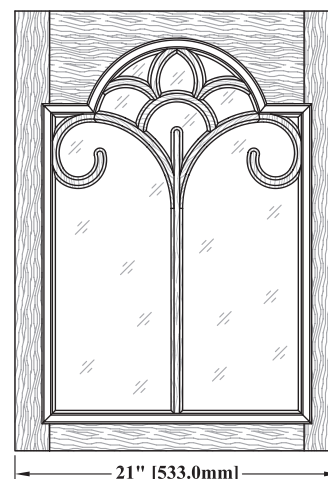

Style 3022
LP123 - 10 Lites


Formula for Glass Size Calculation

1) Formula used to calculate the width/height of rectangular shaped glass to fit a single opening WalzCraft frame with straight stile and rail parts (does not include French Miter doors):

- Glass Width = [Door Width - (stile width x 2)] + [$\frac{3}{8}$ " (GRF width) x 2] - [$\frac{1}{16}$ " (Frame/Glass Gap Width) x 2]
- Glass Height = [Door Height - (rail width x 2)] + [$\frac{3}{8}$ " (GRF width) x 2] - [$\frac{1}{16}$ " (Frame/Glass Gap Width) x 2]

2) To calculate the width/height of rectangular shaped glass to fit a frame provided by another source, or a WalzCraft frame with multiple openings with straight stile and rail parts:

- From the back side of your frame, measure the frame cavity opening (width & height) where the glass will set into the frame.
- Deduct $\frac{1}{8}$ " ($\frac{1}{16}$ " frame/glass gap width x 2) from your width and height dimension.

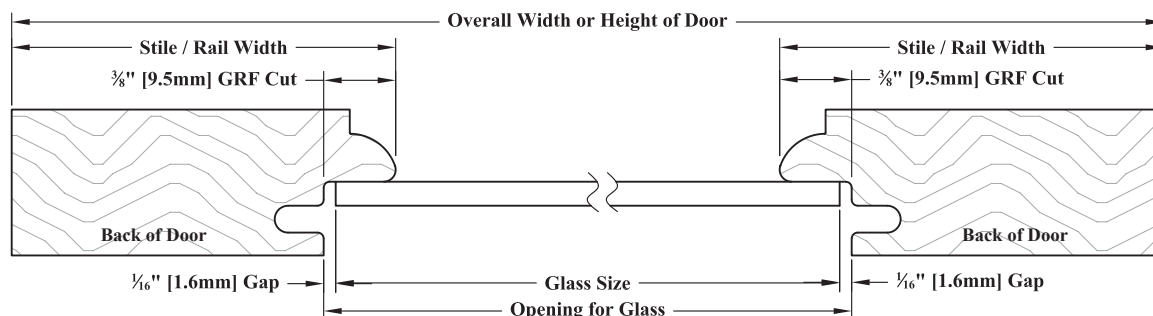


*See **Sizes/Dimensions** notes for frame & mullion doors later in this section for more information on calculating glass sizes.


*See notes in **Section B.7** to calculate glass sizes for French Mitered door frames.

Mullion Construction

WalzCraft may use a variety of joinery methods when constructing our mullion lite patterns. Our goal is to achieve the strongest connection to the door frame and to the other mullions within the pattern. The chosen lite pattern, mullion molding profile, door size, and wood species are all factors that are considered when choosing the best joinery method. One method is our half lap construction. Shown at the right, it provides a very strong joint and is used on patterns where mullions cross over one another at right angles.




Rubber Glass Retainer

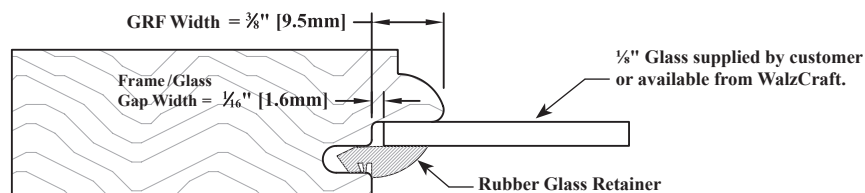


- Please see **Section B.12** of our current **Wholesale Pricing Catalog** for glass retainer lineal foot pricing.
- Glass retainer fits into a slot, as shown in the drawing above, and can only be used with $\frac{1}{8}$ " [3.2mm] glass.
- True Lite mullions **are not constructed with a slot to accept rubber glass retainer**.
- Glass retainer is available in black, brown, white and clear.
- To order retainer with a frame only door, simply check the box on **Door Order Form #2** indicating which color you would like and our Configurator will calculate the amount needed.
- To order retainer by itself, please use **Miscellaneous Order Form #5** and part #155067. Simply enter the color into the **Description** field, and then enter the total required amount of lineal feet into the **quantity** field (qty).
 - You may order the glass retainer by the lineal foot or in full rolls (both are priced the same).
 - White is available in 500 foot rolls.
 - Black, brown and clear are available in 1,000 foot rolls.
- Occasionally, due to the rubber retainer manufacturing process/tolerances, you may find that your retainer is slightly loose in an area. Should this occur, WalzCraft recommends adding a small bead of glue or caulk in this spot to help secure the retainer.

► For PRICING ► See **Section B.12** in our current Wholesale Pricing Catalog.


Mullion Lite Option 1 - Standard Lite

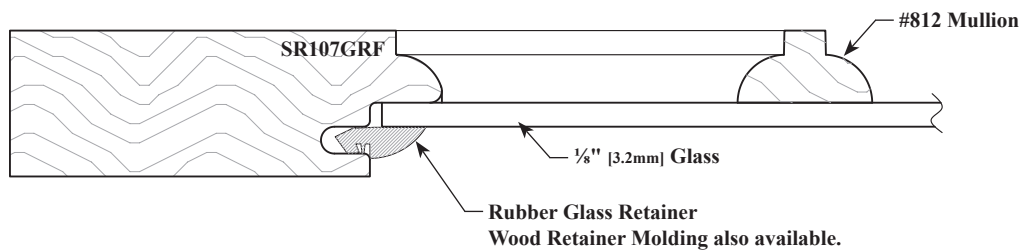

Mullion Lite Option 2 - True Lite with Divider Molding

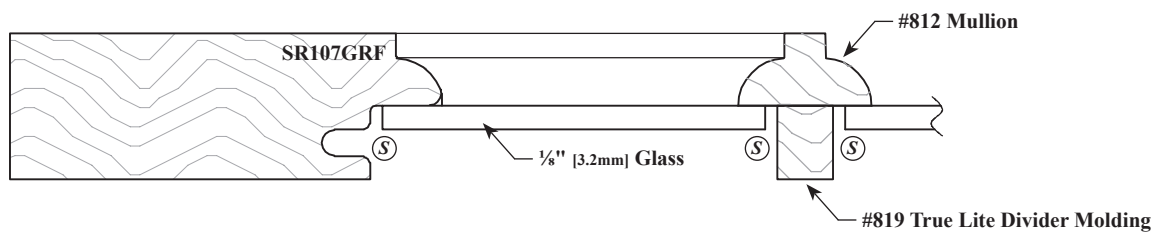

Mullion Lite Option 3 - True Lite Retainer Groove (TLRG)

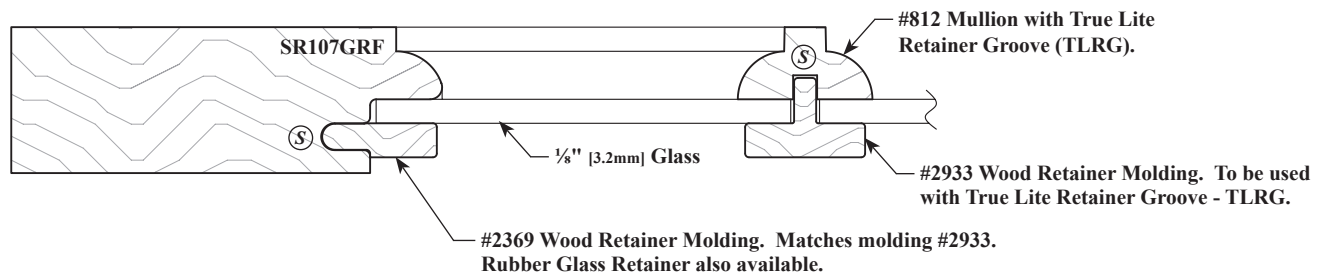

Ⓢ = WalzCraft recommends using silicone caulk to secure the wood retainer molding and/or glass. Please see *Notes* for more information.

► For PRICING ► See Section **B.12** in our current Wholesale Pricing Catalog.





Cabinet Door & Drawer Front Options

Frame Only & Mullion Lite Patterns


B

Wood Retainer Molding (Cut to Size)





For 3/4" [19.1mm] Doors

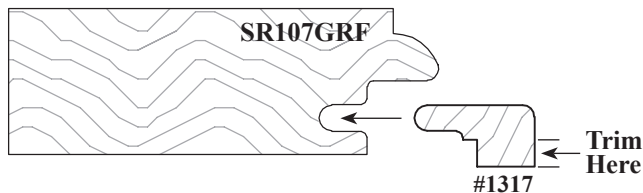

For 1" [25.4mm] Doors




Wood Retainer Molding (Cut to Size)

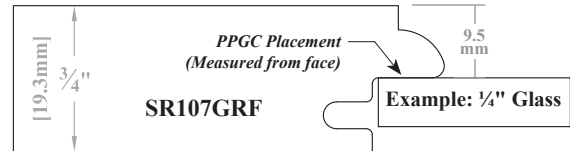


See Notes for more information.

Wood Retainer Molding (Cut to Size)

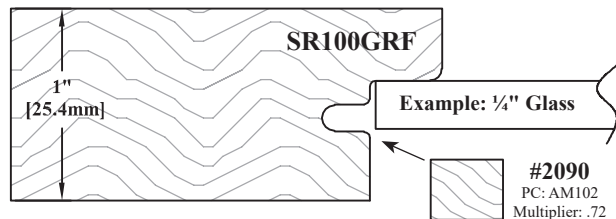


Note: SR100GRF shown at 1" thick.



Wood Tenon Filler Molding (Cut to Size)

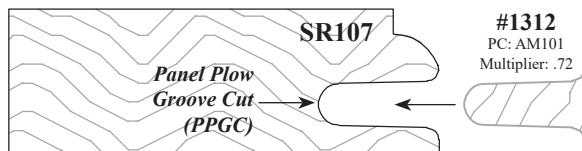

"GRF" Wood Filler Molding (Cut to Size)

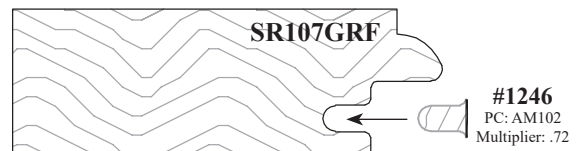

Molding #2933, #3041, #3042 - Wood Retainer Molding for True Lite Retainer Groove -TLRG (Cut to Size)

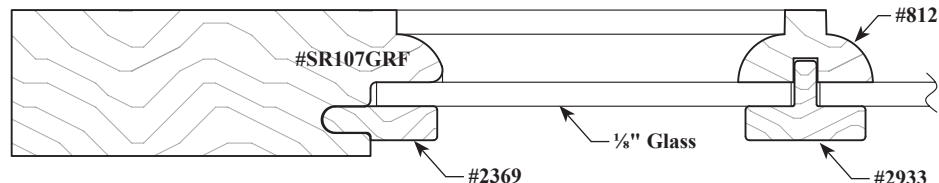

Mullion Molding Width	Wood Retainer Molding
1 5/32" [12.0mm] to 3 9/64" [15.8mm]	Molding #3042
5/8" [15.9mm] to 1 3/64" [26.9mm]	Molding #2933
1 1/16" [27.0mm] to 1 31/64" [38.0mm]	Molding #3041

► For PRICING ► See Section B.12 in our current Wholesale Pricing Catalog.

B.12.9

V18.2



(Phone) 1-800-237-1326 6:00AM - 5:30PM CST (24 Hour Fax) 1-608-781-3667

Ordering & Pricing Notes: Cut to Size Wood Retainer Molding

Ordering Guidelines

1	Order Forms	Please use <i>Door Order Form (E•Z Form #2)</i> .
Pricing		
1	Pricing	Please see <i>Section B.12</i> of our current Wholesale Pricing Catalog .

Technical Notes: Cut to Size Wood Retainer Molding

Miscellaneous

1	Silicone	⑤ = WalzCraft recommends using clear silicone caulk in a small tube. The small capacity tube makes application easier than if using a large caulking gun. Silicone caulk is adhesive enough to hold your molding or glass in place, but flexible enough to allow you to break the bond and peel away the silicone caulk in case the molding or glass needs to be replaced for any reason. When working with True Lites with Divider Molding (<i>see Mullion Lite Option 2</i>), WalzCraft recommends applying a continuous bead of silicone caulk around the perimeter of the glass. When using the True Lite Retainer Groove method (<i>see Mullion Lite Option 3</i>), WalzCraft recommends applying a small dab of silicone caulk approximately every six inches into the grooves before inserting the retainer molding.
---	----------	--

Molding Options (Chapter N)

1	Cut to Size Wood Retainer Moldings	Wood retainer molding, as shown on the previous page, can be cut to size by WalzCraft when ordered in conjunction with a frame only or frame & mullion door. Indicate your chosen wood retainer molding number in the <i>Special Instructions</i> column on the order form. Wood retainer molding can be used in place of rubber retainer in straight stile and rail parts. All GRF “Traditional” and “Mitered” stile and rail profiles will accept wood retainer moldings in frame price classes 101, 103, 108, 115, 117, 132, 301 and 303. You may pin precision cut wood retainer molding in place to create a stationary panel for combination frame and panel doors. (<i>Rubber retainer can be used to install glass in the frame portion.</i>) See <i>Section N.9</i> for 8' lengths of wood retainer molding.
2	#1036, #1120, #3094 Wood Retainer Molding	Designed for use as a wood retainer molding that is fastened to the rear of the frame and can be trimmed to size. See <i>Wood Retainer Molding Compatibility</i> chart on our website: Resources/Technical Information for which molding to used based on glass thickness ($\frac{1}{8}$" or $\frac{1}{4}$"), door thickness and panel plow groove cut placement (PPGC). Cut to Size: When ordered cut to size, WalzCraft will cut molding to length, but <u>customer will be responsible for trimming/sanding molding to required thickness.</u>
3	#1246 GRF Wood Filler Molding	The illustration shows an example of how this molding fits into the GRF groove of the stile and rail profile. Designed to fill the void for the GRF groove in the stiles and rails of frame and mullion doors. For use with $\frac{3}{4}$" [19.3mm] or 1" [25.4mm] thick doors.
4	#1312 Wood Tenon Filler Molding	The illustration shows an example of how this molding fits into the mortise of the stile and rail profile. Designed to fill the mortise PPGC (Panel Plow Groove Cut) of any stile and rail profile for your custom frame requirements. For use with $\frac{3}{4}$" [19.3mm] or 1" [25.4mm] thick doors.
5	#1317, #1329, #2369, #2671, #2871 Wood Retainer Molding	Fit into the GRF cut of the stile and rail profile and are designed to be used with $\frac{1}{8}$" [3.2mm] materials. Cut to Size: When ordered cut to size, WalzCraft will cut molding to length, and trim/sand molding flush to back of door where applicable.
6	#2090 Wood Retainer Molding	Designed for use as a wood retainer molding to accommodate $\frac{1}{4}$ " [6.4mm] material for use with 1" [25.4mm] thick frames.
7	#2933, #3041, #3042 Wood Retainer Molding for True Lite Retainer Groove	Designed to be used as a wood retainer molding for true divided mullion lites. Only available with the following mullion lite patterns: LP001, LP108, LP109, LP110, LP118, LP128, LP131, LP146, LP147. Please submit requests for this application to our Customer Support Team.
8	#2671 Wood Retainer Molding	Fit into the GRF cut of the stile and rail profile and is designed to be used with $\frac{1}{8}$" [3.2mm] materials. Designed for use with: - Traditional stile & rail GRF profiles: SR123, SR145, SR146, SR157, SR160, SR163, SR167, SR169. - Mitered stile & rail GRF profile families: MP628, MP661, MP662, MP680, MP690, MP696, MP6104. - All traditional and mitered Old World stile & rail GRF profiles from <i>Section E.3 and E.11.</i>

⑤ = WalzCraft recommends using silicone caulk to secure the wood retainer molding and/or glass. Please see *Notes* for more information.

Cut-to-Size Wood Retainer Molding - END

► For PRICING ► See Section B.12 in our current Wholesale Pricing Catalog.

Ordering & Pricing Notes: Frame & Mullion Doors

Ordering Guidelines

1 Order Forms Please use *Door Order Form (E•Z Form #2)*.

Pricing

1 Pricing Please see *Section B.12* of our current **Wholesale Pricing Catalog**.

Technical Notes: Frame & Mullion Doors

Cabinet Door & Drawer Front Options (Chapter B)

1 Door Styles

Most Door Styles are available as a Frame or Mullion Door.

Frame or Mullion Door Styles that use Corner Blocks, require glass to be cut to their contour.

Glass openings are routed to follow the contour of the shape for certain door styles. Lists of applicable door styles can be found in *Sections B.1, B.2, B.3 and B.4*.

When ordering door Styles **2500, 2505, 2525, 3500, 3535, 7000, 7010, 7020, 7030, 7040 & 7070** as mullions, we suggest that your lite pattern be no greater than 2 wide due to the shape of the rails; 3 or more lites in the width may require custom construction.

Convex/Concave Options (Chapter D)

1 Available Lite Patterns The  indicates lite patterns that are available convex/concave. See *Chapter D* for more information.

Functional Options (Chapter F)

1 Hinge Boring Hinge boring is available for Frame & Mullion doors. Please see *Section F.1* for additional hinge boring requirements, ordering instructions and compatibility.

General Information (Chapter A)

1 Ready to Assemble (RTA) RTA is available as an option for frame only doors. Not available on doors with mullion lite patterns.

2 Shipping Mullion Lite Pattern Doors

WalzCraft takes great pride producing our lite pattern (LP) doors. To ensure that they arrive to you in ideal condition, you will find your door(s) enclosed in a plastic bag. We're doing this in order to maintain the 6% - 8% moisture content present during the door(s) construction.

- During transit from our plant in La Crosse, Wisconsin to your location, the wood is exposed to varying humidity conditions. When wood is exposed to higher and/or lower humidity, it will take on, or release moisture from the wood. This expansion and contraction of the wood is extremely hard on the very fragile mullions and joints. Also, due to the small mullions having limited gluing surface, WalzCraft may use multiple methods to achieve the best connection to the door frame and each other.
- To maintain the wood's ideal 6% - 8% moisture content, it must be held in a controlled environment of 32% - 38% relative humidity. To maintain this moisture content, we are now shipping our doors in enclosed plastic bags. We advise that the door(s) remain enclosed in the plastic bag until you are ready to finish and/or install into your client's home that is maintained at 32% to 38% relative humidity.
- Lite pattern (LP) doors that are not maintained within a relative humidity of 32% - 38% can experience mullions that bow and/or have joints fail. Neither of these conditions will be considered for warranty replacement.

Material Options

1 MDF Mullions for SolidTone® Finish

MDF mullions are recommended with the specific intent that they be painted.

When ordering any of the following mullion lite patterns, WalzCraft strongly recommends using MDF mullions for SolidTone® or Primed Only for Paint applications when the door frame is solid wood: **LP100, LP112, LP113, LP114, LP115, LP116, LP126, LP127, LP129, LP130, LP132, LP133, LP134, LP139, LP140, LP141, LP142, LP144, LP145, LP148, LP151, LP152, LP153, LP155.**

- MDF has lower rates of expansion and contraction than solid wood, and therefore is an excellent material for the fabrication of complex mullion lite patterns that are intended to be painted.
- MDF lite patterns are designed and machined to have tight radius corners ($\frac{1}{16}$ " radius) whenever possible.
- When ordering MDF mullions for SolidTone® or Primed only for Paint applications, please order your door in any of the following Hybrid/MDF (or MDF-MR) species from the SolidTone® availability grids in *Section R.2*:
 - Birch - Hybrid/MDF - Paint Grade
 - Cherry - Hybrid/MDF - Paint Grade
 - Maple-Hard - Hybrid/MDF - Natural/Standard Grade (recommended for best results)
 - Poplar - Hybrid/MDF - Paint Grade
- When painting cherry, no attempt will be made to conceal any of the naturally occurring characteristics that may be present, including but not limited to pin knots and gum pockets. Please note that if not sealed properly, gum pockets may bleed through your finish.
- MDF lite pattern charges and set-up charges are priced less than solid wood.
 - See *Section B.12* of our current **Wholesale Pricing Catalog**.
- Lite patterns not listed above would still be made from solid wood mullion stock only.

► For PRICING ► See *Section B.12* in our current Wholesale Pricing Catalog.

Technical Notes: Frame & Mullion Doors...continued

Material Options...continued

2	Maple - Hard vs. Soft	For quality reasons, product requiring CNC machining will not be available in any Maple-Hard/Soft-Mixed species or Maple-Soft species. These items should instead be ordered in any of our Maple-Hard species.
		When specifying small moldings in Maple-Soft, WalzCraft reserves the right to substitute with Maple-Hard.

Miscellaneous

1	Standard /True Divided Lites	Mullion lite patterns are available with either standard or true divided lites, unless otherwise noted.
2	Custom Mullion Placement	Custom mullion placement is available. Please submit drawings to our Customer Support Team to request a quote.
3	Wood/Rubber Glass Retainer	See previous pages for our wood and rubber glass retainer options and applications.
4	Compatibility Charts	Please reference our website: Resources/Technical Information .

Molding Options (Chapter N)

1	Applied Moldings on MDF	When an applied molding is added to an MDF product, the molding will be made from Maple-Hard/Soft Mixed-Value/Budget/Paint Grade.
---	-------------------------	---

Profile Options (Chapter E)

1	Stile & Rail Profiles	Miter Profiles: Please see the Miter Compatibility charts on our website: Resources/Technical Information for lite pattern compatibility.
		Traditional/Old World Profiles: Please see the Stile & Rail Compatibility charts on our website: Resources/Technical Information for lite pattern compatibility.
2	Alternative Mullion Molding Required	The following mullion lite patterns require an alternative mullion molding be used with certain stile & rail profiles: LP105, LP106, LP107, LP111, LP112, LP114, LP115, LP117, LP119, LP120, LP121, LP122, LP125, LP127, LP129, LP130, LP132, LP134, LP137, LP138, LP141, LP142, LP144, LP145, LP150, LP151, LP152, LP153.
		Section E.1: SR103/#1268 uses #815, SR121/#1110 uses #2673, SR127/#1263 uses #2407.
		Section E.3: SR192/#1966 uses #2587, SR196/#1304 uses #2925, SR197/#1305 uses #2672, SR199/#1307 uses #2642.
		Section E.5: SR133/AM1717 - #1267 uses #2194, SR133/AM3053 - #2375 uses #3074.
		Section E.9: MP613/#1268 uses #815, MP626/#1110 uses #2673, MP637/#1263 uses #2407, MP668/#1260 uses #2957, MP675/#2375 uses #3074, MP685/#2495 uses #2494.
		Section E.10: MP735/#1164 uses #2557.

Sizes /Dimensions

1	Thicknesses	Some door styles (e.g., Style 10) using frame only pricing are only available ¾" [19.3mm] and 1" [25.4mm] thick (i.e., when using Traditional profiles). Other door styles may also be available 1" [25.4mm], 1⅝" [28.6mm], and 1¼" [31.8mm] thick (i.e., when using Old World profiles). See individual door style sections and/or stile & rail profile sections for available thicknesses. See Section S.3 for possible thickness restrictions based on wood species.
2	Center Rails	Frame and mullion doors over 48"H [1219.2mm] will not have a center rail unless specified by the customer.
		Any frame and/or mullion door over 48" [1219.2mm] high ordered without a center rail will carry no warranty. • See Section A.8 for more information regarding our warranties on warping, bowing and twisting.
		Any mullion door over 60" [1524.0mm] high ordered without a center rail must be built with true divided lites to help maintain structural integrity.
3	Mullion Strips	For mullion strips over 28" [711.2mm] wide or high, WalzCraft recommends applying a small bead of silicone between the back of the mullion and the glass to help assure stability and prevent possible warpage.
4	Minimum Frame Width	Minimum width for a frame with a mullion lite pattern is 12" [304.8mm] unless noted otherwise. <i>Minimum is based on 2¼" [57.2mm] Stiles and Rails.</i>
5	Glass Size Calculations	For single or multiple opening frame only doors and single or multiple opening frame & mullion doors with standard lites, if wanting to order designer glass from WalzCraft with your door, WalzCraft will calculate glass size based on your door specifications. This applies to doors with straight stiles & rails resulting in rectangular shaped glass only. See Section G.1 .
		For single opening frame only doors and single opening frame & mullion doors with standard lites, if wanting to order glass from a vendor other than WalzCraft before receiving the door, please refer to our glass size calculation formula earlier in this section. This applies to doors with straight stiles & rails resulting in rectangular shaped glass only.
		WalzCraft does not calculate glass size for frame & mullion doors with true divided lites or frame only doors with shaped stiles or rails. For these styles we recommend waiting until you receive your door, then take it to your local glass supplier to have your glass cut to fit each opening.

Frame & Mullion Doors - END

► For PRICING ► See Section B.12 in our current Wholesale Pricing Catalog.

Technical & Ordering Notes: Mullion Lite Patterns

Mullion Lite Pattern Guidelines

1	10MUL, 40MUL Flat Panel Door with Mullions	10MUL: Lite pattern is applied to the front face of an MDF RVSCP-PR324 reversed solid center panel.
		40MUL: Lite pattern is applied to the front face of a ¼" [6.4mm] flat panel (veneered or raw MDF).
		A lite pattern must be specified for this style.
		Available with most Traditional profiles with matching mullion stock options.
2	LP001	All lites will be evenly spaced, unless otherwise noted.
		When ordering, please specify the number of lites and the lite pattern configuration (ie: 6 lites with a 2 x 3 pattern).
		Additional design charges may apply for customer specified lite pattern configurations or placement.
3	LP100, LP105, LP107, LP115, LP116, LP117, LP125, LP133, LP137, LP142, LP145	Minimum width for a frame with a Mullion Lite Pattern is 12" [304.8mm]. <i>Minimum is based on 2¼" [57.2mm] Stiles & Rails.</i> Minimum height for LP116 and LP133 is 12" [304.8mm].
		Available with most Traditional GRF profiles with matching mullion stock options. Limitations apply to Mitered GRF profiles.
		Limitations apply to these mullion patterns and Applied Molding.
		LP100, LP115, LP116, LP133, LP142, LP145: See Material Options note for more information on MDF Mullions with a SolidTone® or Primed Only finish.
		A CAD drawing must be approved, prior to manufacturing the products.
4	LP101, LP102, LP103, LP104	Minimum Frame width for these Lite Patterns is 12" [304.8mm]. <i>Minimum is based on 2¼" [57.2mm] stiles, bottom rail, and top rail at the narrowest.</i>
		Available with most Traditional GRF profiles with matching mullion stock options. Not available with Mitered GRF Profiles.
		Limitations apply to these mullion patterns and Applied Molding.
5	LP105	Height must be equal to or greater than the width to allow one pattern or twice the width for a pattern on top & bottom. <i>Minimum is based on 2¼" [57.2mm] Stiles and Rails.</i>
6	LP106	Minimum Frame width for this Lite Pattern is 12" [304.8mm]. <i>Minimum is based on 2¼" [57.2mm] stiles, bottom rail & top rail at the narrowest.</i>
		Specify the Width and Height of the corner lites. <i>Minimum size for corner lites is 2" x 2" [50.8mm x 50.8mm].</i>
		Available with most Traditional GRF profiles with matching mullion stock options. Not available with Mitered GRF Profiles.
		Limitations apply to this mullion pattern and Applied Molding.
7	LP108	Minimum width for a frame with a Mullion Lite Pattern is 12" [304.8mm]. <i>Minimum is based on 2¼" [57.2mm] Stiles and Rails.</i>
		Opening height of the lite pattern must be specified, <i>minimum height is 1" [25.4mm].</i> Width of the lite pattern will be equal.
		Short pieces will be half of the height of the vertical pieces above it and have a "female" cut on the ends.
		Available with all ¾" [19.3mm] Traditional and 1" [25.4mm] Old World Stile and Rail Profile / Mullion Combinations; <i>See Profile Information.</i>
8	LP109	Opening height of the lite pattern must be specified, <i>minimum height is 1" [25.4mm].</i> Width of the lite pattern will be equal.
		Additional design charges may apply for customer specified lite pattern configurations or placements that vary from designs shown.
9	LP110	Minimum width for a frame with a Mullion Lite Pattern is 12" [304.8mm]. <i>Minimum is based on 2¼" [57.2mm] Stiles and Rails.</i>
		Available with most Traditional GRF profiles with matching mullion stock options.
		Pattern consists of two center lites with 1" [25.4mm] spacing; the remaining space is equally divided to the outside.

Continued on next page...

► For PRICING ► See Section B.12 in our current Wholesale Pricing Catalog.

Technical & Ordering Notes: Mullion Lite Patterns...continued

Mullion Lite Pattern Guidelines...continued

10	LP111	Minimum width for a frame with a Mullion Lite Pattern is 12" [304.8mm]. <i>Minimum is based on 2 1/4" [57.2mm] Stiles and Rails.</i>
		One Pattern (4 Lites): Minimum door height must be 1.5 times the door width, plus the total width of the top / bottom rail.
		Two Patterns (7 Lites): Minimum door height must be 2 times the door width, plus the total width of the top / bottom rail.
		Available with most Traditional GRF profiles with matching mullion stock options. Limitations apply to Mitered GRF profiles.
		Limitations apply to these mullion patterns and Applied Molding.
		A CAD drawing must be approved, prior to manufacturing the product.
11	LP112, LP130, LP132, LP138, LP152, LP153	Minimum width for a frame with a Mullion Lite Pattern is 12" [304.8mm]. <i>Minimum is based on 2 1/4" [57.2mm] Stiles and Rails.</i>
		In order to achieve the best look, the height of door must be at least two times the width of door.
		Available with most Traditional GRF profiles with matching mullion stock options. Limitations apply to Mitered GRF profiles.
		Limitations apply to this mullion pattern and Applied Molding.
		LP112, LP130, LP132, LP152, LP153: See Material Options note for more information on MDF Mullions with a Solid-Tone® or Primed Only finish.
		A CAD drawing must be approved, prior to manufacturing the product.
12	LP113	Minimum width for a frame with a Mullion Lite Pattern is 12" [304.8mm]. <i>Minimum is based on 2 1/4" [57.2mm] Stiles & Rails.</i>
		Vertical mullion strip at top and horizontal mullion strips are fixed at 1" long. For LP113 (2) Pattern, the vertical mullion strip at bottom is also fixed at 1" long.
		Minimum height of door must be equal to or greater than the width. For LP113 (2) Pattern, the minimum height must be at least 1 1/4 times the width.
		Available with most Traditional GRF profiles with matching mullion stock options. Limitations apply to Mitered GRF profiles.
		Limitations apply to these mullion patterns and Applied Molding.
		See Material Options note for more information on MDF Mullions with a SolidTone® or Primed Only finish.
13	LP114, LP134	Minimum width for a frame with a Mullion Lite Pattern is 12" [304.8mm]. <i>Minimum is based on 2 1/4" [57.2mm] Stiles and Rails.</i>
		Minimum height needs to be at least 1 1/2 times the width of the door.
		Available with most Traditional GRF profiles with matching mullion stock options. Limitations apply to Mitered GRF profiles.
		Limitations apply to this mullion pattern and Applied Molding.
		See Material Options note for more information on MDF Mullions with a SolidTone® or Primed Only finish.
		A CAD drawing must be approved, prior to manufacturing the product.
14	LP118	Specify the Width and Height of the corner lites. <i>Minimum size for corner lites is 1" x 1" [25.4mm x 25.4mm].</i>
		Additional design charges may apply for customer specified lite pattern configurations or placements.
15	LP119, LP120, LP121 LP122	Minimum width for a frame with a Mullion Lite Pattern is 12" [304.8mm]. <i>Minimum is based on 2 1/4" [57.2mm] Stiles and Rails.</i>
		Corner lites must be specified at the widest & narrowest: this determines the radius of the curved piece. <i>Minimum at narrowest is 2" [50.8mm].</i>
		Available with most Traditional GRF profiles with matching mullion stock options. Limitations apply to Mitered GRF profiles.
		Limitations apply to these mullion patterns and Applied Molding.

Continued on next page...

► For PRICING ► See Section B.12 in our current Wholesale Pricing Catalog.

Technical & Ordering Notes: Mullion Lite Patterns...continued

Mullion Lite Pattern Guidelines...continued

16	LP123	Due to complexity, width dimensions for this Lite Pattern are limited to fixed sizes . Doors are available from 12" to 24" wide in 1" increments. Heights may vary.
		Width dimensions are based on 2¼" [57.2mm] stiles.
		Constructed with Stile & Rail Profile SR100 , Applied Molding #101 or #102 (Section N.5) and Mullion Stock Molding #1895 (Section N.6) .
		Style 3020 / LP123 is only available with the following Outside Edge profiles: D7, D12, D15, D17, D18, D21, D24, D32, D41, D52, D67, D93, D101, D102, D115, D118, D120 . • There are no Outside Edge profile limitations with Style 3022 / LP123 .
		When ordering sizes that range between one or two templates, the frame must be constructed with non-standard part sizes to maintain the mullion pattern template size. You may increase the size of the stiles on the frame, or decrease the size of the stiles on the frame. <i>If ordering a mullion door 12½" [317.5mm] wide, you will need 2½" [63.5mm] stiles.</i> The top and bottom rails may also be increased by the same value to maintain aesthetics and balance proportions.
		A CAD drawing must be approved, prior to manufacturing the product.
17	LP124	Minimum width for a frame with a Mullion Lite Pattern is 12" [304.8mm]. <i>Minimum is based on 2¼" [57.2mm] Stiles and Rails.</i>
		Specify the Width and Height of the corner lites. <i>Minimum size for corner lites is 1" x 1" [25.4mm x 25.4mm].</i>
		Limitations apply to Mitered GRF profiles.
		Limitations apply to these mullion patterns and Applied Molding.
		A CAD drawing must be approved, prior to manufacturing the product.
18	LP126	Minimum width for a frame with a Mullion Lite Pattern is 12" [304.8mm]. <i>Minimum is based on 2¼" [57.2mm] Stiles and Rails.</i>
		Width of diamond portion will be approximately one third the size of opening width, with a minimum of 2" x 2" [50.8mm x 50.8mm] square.
		Height must be at least two times the width of the door.
		Available with most Traditional GRF profiles with matching mullion stock options.
		Limitations apply to Mitered GRF profiles.
		Limitations apply to these mullion patterns and Applied Molding.
		See Material Options note for more information on MDF Mullions with a SolidTone® or Primed Only finish.
		A CAD drawing must be approved, prior to manufacturing the product.
19	LP127	Minimum width for a frame with a Mullion Lite Pattern is 12" [304.8mm]. <i>Minimum is based on 2¼" [57.2mm] Stiles and Rails.</i>
		For LP127 - 4 Lites, minimum height of the door must be greater than the width.
		For LP127 - (2) Patterns - 7 Lites, minimum height must be at least 2 times the width of the door.
		Available with most Traditional GRF profiles with matching mullion stock options.
		Limitations apply to Mitered GRF profiles.
		Limitations apply to this mullion pattern & Applied Molding.
		See Material Options note for more information on MDF Mullions with a SolidTone® or Primed Only finish.
		A CAD drawing must be approved, prior to manufacturing the product.
20	LP128	Minimum width for a frame with a Mullion Lite Pattern is 12" [304.8mm]. <i>Minimum is based on 2¼" [57.2mm] Stiles & Rails.</i>
		Opening height of top & bottom lites must be specified, minimum of 1". Width of top & bottom lites will be equal.
		Width of center lite pattern will consist of two center lites with 1" [25.4mm] spacing. The remaining space on either side will be equally divided.
		Available with most Traditional GRF profiles with matching mullion stock options. Limitations apply to Mitered GRF profiles.
		Limitations apply to this mullion pattern and Applied Molding.

Continued on next page...

► For PRICING ► See Section **B.12** in our current Wholesale Pricing Catalog.

Technical & Ordering Notes: Mullion Lite Patterns...continued

Mullion Lite Pattern Guidelines...continued

21	LP129	Minimum width for a frame with a Mullion Lite Pattern is 12" [304.8mm]. <i>Minimum is based on 2 1/4" [57.2mm] Stiles and Rails.</i>
		Minimum height of door must be equal to or greater than the width.
		Available with most Traditional GRF profiles with matching mullion stock options. Limitations apply to Mitered GRF profiles.
		Limitations apply to this mullion pattern and Applied Molding.
		See Material Options note for more information on MDF Mullions with a SolidTone® or Primed Only finish.
		A CAD drawing must be approved, prior to manufacturing the product.
22	LP131	Minimum width for a frame with a Mullion Lite Pattern is 12" [304.8mm]. <i>Minimum is based on 2 1/4" [57.2mm] Stiles and Rails.</i>
		Opening height of top & bottom lites must be specified, minimum of 1" [25.4mm]. Width of top & bottom lites will be equal.
		Width of center lite pattern will consist of two center lites with 1" [25.4mm] spacing. The remaining space on either side will be equally divided.
		Available with most Traditional GRF profiles with matching mullion stock options. Limitations apply to Mitered GRF profiles.
		Limitations apply to this mullion pattern and Applied Molding.
23	LP136	Minimum size for a frame with this mullion lite pattern is 12"W x 19"H [304.8mm x 482.6mm]. <i>Minimum is based on 2 1/4" [57.2mm] Stiles and Rails.</i>
		Horizontal mullion will be centered on opening height. Width of center consists of two 5/8" [15.9mm] wide lites with the remaining space on either side being equally divided.
		Mullions are 5/8" [15.9mm] wide with the top left/right vertical mullions widening to 1 1/16" [23.8mm].
		Only available with the SR100GRF and SR123GRF stile & rail profiles.
		A CAD drawing must be approved, prior to manufacturing the product.
24	LP139	Minimum width for a frame with a Mullion Lite Pattern is 12" [304.8mm]. <i>Minimum is based on 2 1/4" [57.2mm] Stiles and Rails.</i>
		Minimum door height needs to be at least the width of the door plus the width of the bottom rail.
		Square portion is a fixed size with a 2 1/2" x 2 1/2" [63.5mm x 63.5mm] opening.
		Drawing shows the horizontal mullion strip dividing the opening at an approximate 30/70 ratio.
		See Material Options note for more information on MDF Mullions with a SolidTone® or Primed Only finish.
25	LP140	Minimum width for a frame with a Mullion Lite Pattern is 12" [304.8mm]. <i>Minimum is based on 2 1/4" [57.2mm] Stiles and Rails.</i>
		Minimum height of door must be at least two times the width of door.
		Available with most Traditional GRF profiles with matching mullion stock options. Limitations apply to Mitered GRF profiles.
		Limitations apply to this mullion pattern and Applied Molding.
		See Material Options note for more information on MDF Mullions with a SolidTone® or Primed Only finish.
		A CAD drawing must be approved, prior to manufacturing the product.
26	LP141	Corner lites are a fixed size with 2" x 2" [50.8mm x 50.8mm] openings.
		Minimum width for a frame with a Mullion Lite Pattern is 12" [304.8mm]. <i>Minimum is based on 2 1/4" [57.2mm] Stiles and Rails.</i>
		Minimum height of the door must be at least 1 1/2 times the width.
		Available with most Traditional GRF profiles with matching mullion stock options.
		Limitations apply to Mitered GRF profiles.
		Limitations apply to this mullion pattern & Applied Molding.
		See Material Options note for more information on MDF Mullions with a SolidTone® or Primed Only finish.
		A CAD drawing must be approved, prior to manufacturing the product.

Continued on next page...

► For PRICING ► See Section B.12 in our current Wholesale Pricing Catalog.

Technical & Ordering Notes: Mullion Lite Patterns...continued

Mullion Lite Pattern Guidelines...continued

27	LP143	Minimum width for a frame with a Mullion Lite Pattern is 12" [304.8mm]. <i>Minimum is based on 2 1/4" [57.2mm] Stiles and Rails.</i>
		Specify the width and height of the corner lites. <i>Minimum size for corner lites is 1" x 1" [25.4mm x 25.4mm].</i>
		Specify height of full width horizontal lites.
		Width of center lites will match width of lites at top and bottom.
		Additional design charges may apply for customer specified lite pattern configurations or placements.
28	LP144	Minimum width for a frame with a Mullion Lite Pattern is 12" [304.8mm]. <i>Minimum is based on 2 1/4" [57.2mm] Stiles and Rails.</i>
		Minimum height needs to be at least 1 3/4 times the width of the door.
		Available with most Traditional GRF profiles with matching mullion stock options. Limitations apply to Mitered GRF profiles.
		Limitations apply to this mullion pattern and Applied Molding.
		See Material Options note for more information on MDF Mullions with a SolidTone® or Primed Only finish. A CAD drawing must be approved, prior to manufacturing the product.
29	LP148	Minimum width for a frame with a mullion lite pattern is 12" [304.8mm]. <i>Minimum is based on 2 1/4" [57.2mm] Stiles and Rails.</i>
		Horizontal mullion strips are fixed at 1" long.
		Minimum height of door must be equal to or greater than the width.
		See Material Options note for more information on MDF Mullions with a SolidTone® or Primed Only finish.
		A CAD drawing must be approved, prior to manufacturing the product.
30	LP149	Minimum width for a frame with a Mullion Lite Pattern is 12" [304.8mm]. <i>Minimum is based on 2 1/4" [57.2mm] Stiles and Rails.</i>
		Height of door must be greater than the width.
		Available with most Traditional GRF profiles with matching mullion stock options. Limitations apply to Mitered GRF profiles.
		Limitations apply to this mullion pattern and applied molding.
		A CAD drawing must be approved, prior to manufacturing the product.
31	LP150	Minimum width for a frame with a Mullion Lite Pattern is 12" [304.8mm]. <i>Minimum is based on 2 1/4" [57.2mm] Stiles and Rails.</i>
		Available with most Traditional GRF profiles with matching mullion stock options. Limitations apply to Mitered GRF profiles.
		Limitations apply to this mullion pattern and Applied Molding.
		A CAD drawing must be approved, prior to manufacturing the product.
32	LP151	Minimum width for a frame with a Mullion Lite Pattern is 12" [304.8mm]. <i>Minimum is based on 2 1/4" [57.2mm] Stiles and Rails.</i>
		In order to achieve the best look, the height of door must be at least two times the width of the door.
		Available with most Traditional GRF profiles with matching mullion stock options. Limitations apply to Mitered GRF profiles.
		Limitations apply to this mullion pattern & Applied Molding.
		See Material Options note for more information on MDF Mullions with a SolidTone® or Primed Only finish. A CAD drawing must be approved, prior to manufacturing the product.
33	LP154	Specify the Width and Height of the corner lites. <i>Minimum size for corner lites is 1" x 1" [25.4mm x 25.4mm].</i>
		Height of center lites will match the specified height of corner lites.
		Additional design charges may apply for customer specified lite pattern configurations or placements.

Continued on next page...

Technical & Ordering Notes: Mullion Lite Patterns...continued

Mullion Lite Pattern Guidelines...continued


34	LP155	Minimum size for a frame with this mullion lite pattern is 10"W x 18"H [254.0mm x 457.2mm]. Minimum is based on 2¼" [57.2mm] wide stiles and rails.
		Specify length of vertical mullion strips and horizontal mullion strips. Minimum length of 1½" [38.1mm].
		Specify size of squares/rectangles. Minimum size of 2½" x 2½" [63.5mm x 63.5mm].
		Available with <i>most</i> Traditional GRF profiles with matching mullion stock options. Limitations apply to Mitered GRF profiles.
		Limitations apply to this mullion pattern and applied moldings.
		See <i>Material Options</i> note for more information on MDF mullions with SolidTone® or Primed Only for Paint finishes.
		A CAD drawing must be approved prior to manufacturing the product.

Mullion Lite Pattern Guidelines - END


Combination Frame-Only & Panel Door Styles




Style: 1616
PC: 103



Style: 1616M
PC: 303



Style: 4016
PC: 203



Style: 4016M
PC: 403

Ordering & Pricing Notes: Combination Frame & Panel Doors

Ordering Guidelines

1	Order Forms	Please use Door Order Form (E•Z Form #2) .
2	Ordering Guidelines	Specify the: • Location of frame-only section (top or bottom). ◦ Remaining section will be either a raised panel or a flat panel depending on style chosen. ◦ Please provide center panel profile if ordering Style 1616 or Style 1616M. • When applicable, please also indicate the mullion lite pattern (Section B.12) or slat/dowel pattern (Section G.6). • Center rail placement (distance from top of door to top of center rail).

Pricing

1	Pricing	Please see Section B.13 of our current Wholesale Pricing Catalog .
---	---------	--

Technical Notes: Combination Frame & Panel Doors

Cabinet Door & Drawer Front Options (Chapter B)

1	Mullion Lite Patterns	The frame-only section is available with a mullion lite pattern. See Section B.12 for more information.
2	French Miter Construction	Door styles 1616M and 4016M are also available with French Miter construction (Section B.7). Simply add an "FM" to the style number (ie: Style 1616FM).
3	Style 1616 and 4016	These door styles are available with shaped rails. Please submit these requests to our Customer Support Team. A quote will be provided, as additional charges may apply.

Design Options (Chapter G)

1	Slats & Dowels	The frame-only section is available with slats or dowels. See Section G.6 for more information.
---	----------------	--

Functional Options (Chapter F)

1	Hinge Boring	Hinge boring is available for Combination Frame & Panel doors. Please see Section F.1 for additional hinge boring requirements, ordering instructions and compatibility.
---	--------------	---

General Information (Chapter A)

1	Ready to Assemble (RTA)	RTA is not available as an option.
---	-------------------------	------------------------------------

Material Options

1	Center Panel	These doors can be ordered with raised or reversed center panels in solid wood & raw MDF or with flat center panels in ¼" [6.4mm] wood veneer & ¼" [6.4mm] raw MDF.
---	--------------	---

Continued on next page...

► For PRICING ► See **Section B.13** in our current Wholesale Pricing Catalog.

Technical Notes: Combination Frame & Panel Doors**Profile Options (Chapter E)**

1	Style 1616, 4016	Any Traditional or Old World stile and rail profile can be used (<i>Sections E.1, E.2, E.3</i>). • Some profiles <i>may not</i> be compatible for use with mullions or lite pattern options.
2	Style 1616M, 4016M	Any Mitered stile and rail profile can be used (<i>Sections E.9, E.10, E.11</i>). • Some profiles <i>may not</i> be compatible for use with mullions or lite pattern options.
7	French Miter Profiles	French Mitered doors are available with many of our MP600/MP6000 Series Mitered Profiles. Please see <i>Section E.9</i> . Any MP600/MP6000 series profile number that has a corresponding [FM] symbol is available for a French Miter door.
8	SR167	Not compatible with combination frame & panel door construction.

Sizes/Dimensions

1	Thicknesses	Combination Frame & Panel doors are available ¾" [19.3mm] and 1" [25.4mm] thick. See <i>Section S.3</i> for possible thickness restrictions based on wood species.
---	-------------	---

Combination Frame & Panel Doors - END

► For PRICING ► See Section **B.13** in our current Wholesale Pricing Catalog.


Operable/Adjustable Louvers (Accommodates Air Flow and/or Light Penetration Flexibility) - Interior Use Only

2" Operable Louver
Construction Shown

See Notes


Louver Actuator
& Mouse Hole

50/50 Split Shown




Style: 8000
Full Louver
Frame: PC103 x 0.6
Min. Size: See Notes

50/50 Split Shown




Style: 8000
Louver Top-RP Bottom
PC: 103
Min. Size: See Notes

50/50 Split Shown




Style: 4044
Louver Top-FP Bottom
PC: 203
Min. Size: See Notes

60/40 Split Shown




Style: 1000
Full Louver
Frame: PC103 x 0.6
Min. Size: See Notes

60/40 Split Shown




Style: 1000
Louver Top-RP Bottom
PC: 103
Min. Size: See Notes


60/40 Split Shown



Style: 4043
Louver Top-FP Bottom
PC: 203
Min. Size: See Notes




Style: 10
Full Louver
Frame: PC101 x 0.6
Min. Size: See Notes



Style: 1010
Full Louver
Frame: PC103 x 0.6
Min. Size: See Notes

Operable Slat Moldings

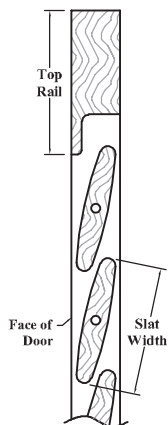

1" [25.4mm] Molding



#2188
PC: M101
Sq Ft: .72

1½" [38.1mm] Molding



#2189
PC: M101
Sq Ft: 1.00

2" [50.8mm] Molding



#2190
PC: M101
Sq Ft: 1.33



2½" [63.5mm] Molding




#2239
PC: M101
Sq Ft: 1.67

► For PRICING ► See Section **B.14** in our current Wholesale Pricing Catalog.


Non-Operable (Fixed) Louvers (Accommodates Air Flow and Light Penetration - No Adjustability) - Interior Use Only

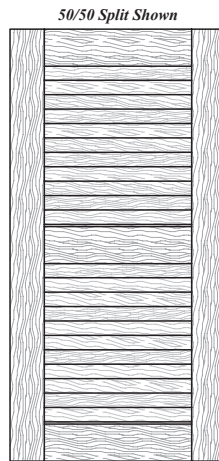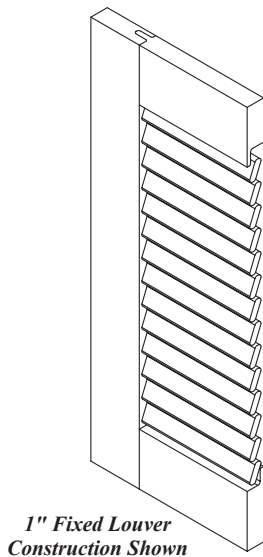


Style: 8000
Full Louver
Frame: PC103 x 0.6
Min. Size: See Notes

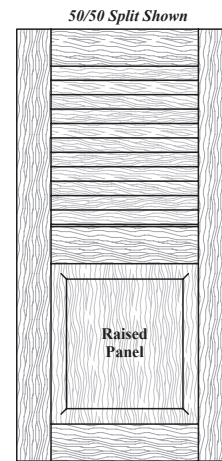


Style: 8000
Louver Top-RP Bottom
PC: 103
Min. Size: See Notes

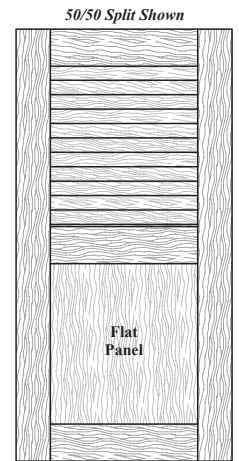


Style: 4044
Louver Top-FP Bottom
PC: 203
Min. Size: See Notes




Style: 10
Full Louver
Frame: PC101 x 0.6
Min. Size: See Notes




Style: 1010
Full Louver
Frame: PC103 x 0.6
Min. Size: See Notes

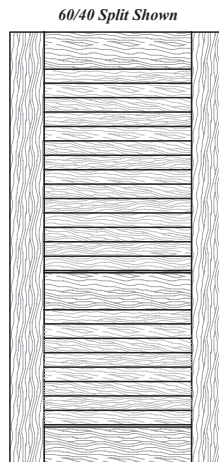

Style: 1000
Full Louver
Frame: PC103 x 0.6
Min. Size: See Notes

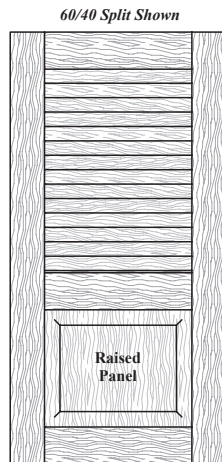


Style: 1000
Louver Top-RP Bottom
PC: 103
Min. Size: See Notes

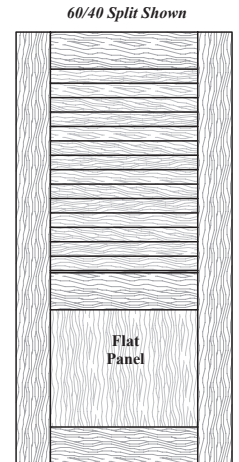

Style: 4043
Louver Top-FP Bottom
PC: 203
Min. Size: See Notes

Non-Operable Slat Moldings

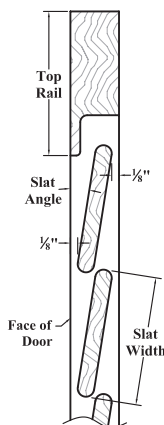

1" [25.4mm] Molding



#1051
PC: M102
Sq Ft: .72

1 1/4" [31.8mm] Molding



#2436
PC: M102
Sq Ft: .83

1 1/2" [38.1mm] Molding



#1245
PC: M102
Sq Ft: 1.00

2" [50.8mm] Molding



#1282
PC: M102
Sq Ft: 1.33

2 1/2" [63.5mm] Molding



#2238
PC: M102
Sq Ft: 1.67

► For PRICING ► See Section B.14 in our current Wholesale Pricing Catalog.

Ordering & Pricing Notes: Louvered Doors/Wood Shutters - Operable & Non-Operable (Fixed)**Ordering Guidelines**

1	Order Forms	Please use Door Order Form (E•Z Form #2) .
2	Ordering Information	Make sure to include the following information with your order: • Operable or Non-Operable louvers. • Louver molding number. • Louver wood species/grade. Reference notes below for additional information regarding louvered door specifications.

Pricing

1	Pricing	Please see Section B.14 of our current Wholesale Pricing Catalog .
---	---------	--

Technical Notes: Louvered Doors/Wood Shutters - Operable & Non-Operable (Fixed)**Cabinet Door & Drawer Front Options (Chapter B)**

1	Door Styles	Available for door styles in frame price classes PC101 and PC103 .
2	Double Panel Doors	Please specify which section you prefer to have the louvers installed in. They are available in the top section, bottom section or both, and can be ordered with a 50/50 or 60/40 split. If you prefer a custom center rail placement, please specify the dimension from the top of the door to the top of the center rail.
3	60/40 Split	If you plan to align louvered 60/40 split doors with non-louvered 60/40 split doors, center rail placement on the doors could vary due to louver size and placement, please specify a custom center rail placement, <i>see above note</i> .

Finish Options (Chapter R)

1	Louver Actuator	When ordering operable louver doors, the louver actuator is attached to the louvers with small metal eyelets. WalzCraft recommends removing these prior to finishing the doors, then reinstalling them once complete.
---	-----------------	---

Functional Options (Chapter F)

1	Hinge Boring	Hinge boring is available for Louvered Doors/Wood Shutters - Operable & Non-Operable (Fixed). Please see Section F.1 for additional hinge boring requirements, ordering instructions and compatibility. Operable & Non-Operable (Fixed) Louver doors ordered with hinge boring have a minimum stile & rail width of 2" [50.8mm].
---	--------------	--

General Information (Chapter A)

1	Interior Use Only	WalzCraft's Louvered Doors/Wood Shutters are intended for interior use only.
2	Ready to Assemble (RTA)	RTA is not available as an option.

Material Options

1	Availability	Operable & Non-Operable Louver doors are only available in solid wood and hybrid/MDF (solid wood stiles & rails with MDF center panels). • Not available with MDF stiles/rails or louvers.
---	--------------	--

Miscellaneous

1	Air Flow/Light	Operable/Adjustable Louver doors accommodate air flow and/or light penetration flexibility. Non-Operable (Fixed) Louver doors accommodate air flow and light penetration (no adjustability).
---	----------------	---

Profile Options (Chapter E)

1	Stile & Rail Profile	Only available with the SR100-NPC stile and rail profile when using Traditional construction. Only available with the SR195-NPC stile and rail profile when using Old World construction.
---	----------------------	--

Continued on next page...► For **PRICING** ► See **Section B.14** in our current Wholesale Pricing Catalog.


Technical Notes: Louvered Doors/Wood Shutters - Operable & Non-Operable (Fixed)...continued

Sizes/Dimensions		
1	Thickness Options	Available ¾" [19.3mm], 1" [25.4mm], 1½" [28.6mm], 1¼" [31.8mm] thick. • See Section S.3 for possible thickness restrictions based on wood species. • Please submit requests for other thicknesses to our Customer Support team.
2	Louver Setbacks	For non-operable louver doors, the louver setback varies with the door thickness and construction type. • ¾" thick Traditional construction: Setback = ⅛" [3.0mm] from face of door. • 1" thick Traditional construction: Setback = ⅛" [3.0mm] from face of door. • 1" thick Old World construction: Setback = ¼" [6.0mm] from face of door. • 1½" thick Old World construction: Setback = ¼" [6.0mm] from face of door. • 1¼" thick Old World construction: Setback = ¼" [6.0mm] from face of door. For operable louver doors, the center of the louver will be positioned at the center of the door thickness.
3	Maximum Door Height	Maximum height for open louvered doors (operable and non-operable) is 96" [2438.4mm].
4	Minimum Door Sizes	Please reference the Louver Door Minimum Sizes compatibility chart on our website under: Resources/Technical Information . This chart will give you the minimum sizes for Operable, Non-Operable and Fixed Louver door styles based on louver size.
5	Minimum Stile & Rail Widths	Minimum width for top and bottom rails is 1¾". Minimum width for left and right stiles is 2". Minimum width for center stiles and center rails is 2¼".
6	Non-Standard Parts	The top, bottom and center rails may need to be adjusted in size to accommodate full louver placement within an opening. Non-Standard part size charges will apply.
7	Open Louvers Spacing	Spacing from louver to louver is ⅜" (2.5mm). The spacing at the top and bottom varies with the size of the louver.
8	Operable Louvers Spacing	Due to the movement of the louvers, the spacing between louvers will be fixed.
9	Fixed Louver Stabilizer	Non-Operable (Fixed) Louvered doors with an opening width of 16" [406.4mm] or greater will receive a fixed louver stabilizer that attaches to the back of the louvers and door rails. Additional charges will apply.
10	Doors - 36" [914.4mm] Wide	Operable and Non-Operable (Fixed) Louvered doors 36" [914.4mm] and wider require a center stile, see Style 1010 on previous page.
11	Louvered Slats Sizes	Non-Operable (Fixed) Louvered slats available in 1" [25.4mm], 1¼" [31.8mm], 1½" [38.1mm], 2" [50.8mm], and 2½" [63.5mm] widths. See Section N.9 for 8' moldings. Operable Louvered slats available in 1" [25.4mm], 1½" [38.1mm], 2" [50.8mm] and 2½" [63.5mm] widths. See Section N.9 for 8' moldings.

Louvered Doors/Wood Shutters - Operable & Non-Operable (Fixed) - END

► For PRICING ► See Section **B.14** in our current Wholesale Pricing Catalog.


Closed Louvers (Does Not Accommodate Air Flow or Light Penetration) - Interior Use Only

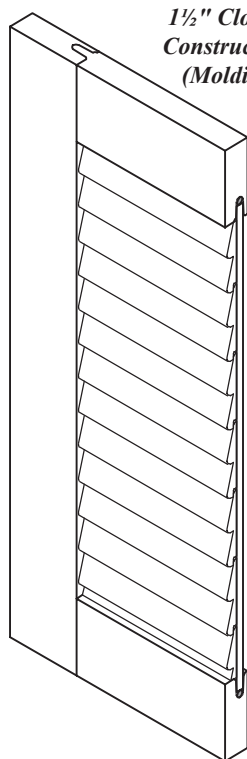


1 1/2" Closed Louver
Construction Shown
(Molding #1187)




Style: 4044
Full Louver
PC: 203
Min. Size: See Notes

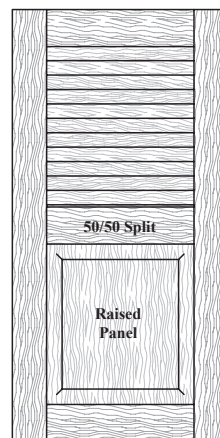


Style: 8000
Louver Top-RP Bottom
PC: 103
Min. Size: See Notes

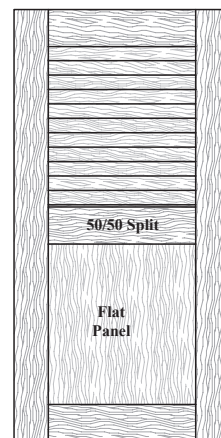

Style: 4044
Louver Top-FP Bottom
PC: 203
Min. Size: See Notes



Style: 40
Full Louver
PC: 201
Min. Size: See Notes



Style: 4040
Full Louver
PC: 203
Min. Size: See Notes



Style: 4043
Full Louver
PC: 203
Min. Size: See Notes








Style: 1000
Louver Top-RP Bottom
PC: 103
Min. Size: See Notes









Style: 4043
Louver Top-FP Bottom
PC: 203
Min. Size: See Notes

► For PRICING ► See Section **B.15** in our current Wholesale Pricing Catalog.

Slat Applied Molding Options - Interior Use Only

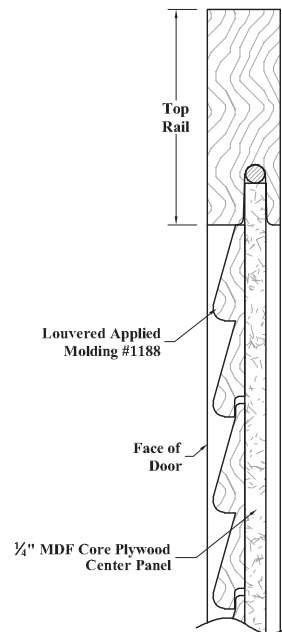

Beaded/Reeded Applied Molding Options - Interior Use Only

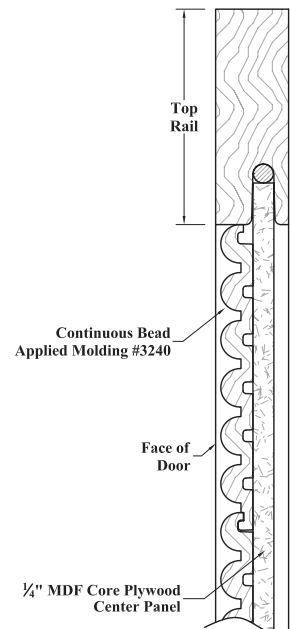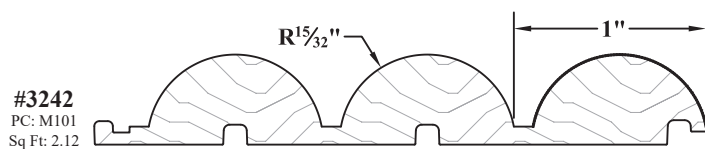

► For PRICING ► See Section B.15 in our current Wholesale Pricing Catalog.

Ordering & Pricing Notes: Louvered Doors/Wood Shutters - Closed Louvers**Ordering Guidelines**

1	Order Forms	Please use <i>Door Order Form (E•Z Form #2)</i> .
Pricing		
1	Pricing	Please see <i>Section B.15</i> of our current Wholesale Pricing Catalog .

Technical Notes: Louvered Doors/Wood Shutters - Closed Louvers**Cabinet Door & Drawer Front Options (Chapter B)**

1	Door Styles	Available in the following door styles: 40, 1400, 1401, 2428, 2434, 2632L/R, 3010, 3060L/R, 3160, 3170, 3231L/R, 3232L/R, 3234, 3235, 3271, 3272, 3284L/R, 3289L/R, 3291L/R, 3465, 4020, 4030, 4040, 4041, 4043, 4044, 4045, 4150.
---	-------------	--

Finish Options (Chapter R)

1	Stain	Available with a Natural/Clear Coat (<i>no stain</i>), Wiping, Spray No-Wipe, and Water Based Wiping stain options with the following exception: • Closed louver doors using beaded/reeded applied molding #3215 or #3241 are not available with spray no wipe stains. Individual moldings #3215 and #3241 are not available with spray no wipe stains.
2	SolidTone®	Available with all SolidTone®, SolidTone® WoodGrain and Primed Only for Paint options.
3	Glaze, Rub Through	Please submit your requests for glazing and/or Rub Through options for Nexus doors to our Customer Support Team.

Functional Options (Chapter F)

1	Hinge Boring	Hinge boring is available for Louvered Doors/Wood Shutters - Closed Louvers. Please see <i>Section F.1</i> for additional hinge boring requirements, ordering instructions and compatibility.
---	--------------	---

General Information (Chapter A)

1	Interior Use Only	WalzCraft's Louvered Doors/Wood Shutters are intended for interior use only.
2	Ready to Assemble (RTA)	RTA is <i>not</i> available as an option.

Material Options

1	Availability	Closed Louver doors are available in solid wood, raw MDF or Hybrid/MDF.
2	MDF Stiles/Rails with Solid Wood Louver Molding	When stiles/rails are MDF, the closed louver molding will be made from one of the following: • Maple-Hard/Soft-Mixed-Value/Budget/Paint Grade • Birch-Value/Budget/Paint Grade • Poplar-Value/Budget/Paint Grade.

Miscellaneous

1	Air Flow/Light	Closed Louver doors <i>do not</i> accommodate air flow or light penetration.
---	----------------	--

Molding Options (Chapter N)

1	Interlocking Moldings	Interlocking louver slat moldings and beaded applied moldings are designed to be affixed to a ¼" [6.4mm] veneered panel or a ¼" [6.4mm] raw MDF panel, to simulate <i>open</i> louvers. • Louver slat molding are only available in a horizontal (left to right) orientation. • When ordering beaded applied molding, please specify your preference for the direction/placement as either horizontal (left to right) or vertical (top to bottom). These moldings are cut to fit. As a result, you may end up with a partial louver slat or bead on the center panel. The stile/rail widths will be unaltered. Molding drawings are shown at full scale.
2	Louvered Moldings	See previous page for closed louver and beaded applied molding options and for information needed to order 8' pieces of molding only. Pricing for individual 8' moldings can be found in <i>Section N.12</i> of our current Wholesale Pricing Catalog .

Profile Options (Chapter E)

1	Stile & Rail Profile	SR100 will accept molding, #1187, #1188, #1641, #2503, #2906, #3215, #3240, #3241, #3243. SR195 will accept molding #3242.
---	----------------------	---

Continued on next page...► For PRICING ► See Section **B.15** in our current Wholesale Pricing Catalog.

Technical Notes: Louvered Doors/Wood Shutters - Closed Louvers...continued

B

Sizes/Dimensions

1	Thicknesses	When using Traditional stile and rail profile SR100 , closed louver doors made from solid wood are available ¾" [19.3mm] and 1" [25.4mm] thick.
		When using Old World stile and rail profile SR195 , closed louver doors made from solid wood are available 1" [25.4mm], 1½" [28.6mm] and 1¾" [31.8mm] thick.
		See Section S.3 for possible thickness restrictions based on wood species.
2	Maximum Opening Sizes	The maximum size for openings on closed louver doors that WalzCraft will warrant is 36"W and/or 36"H. • Closed louver doors with openings greater than this will carry no warranty against bowing. • If ordering closed louver doors with openings greater than 36"W and/or 36"H, we recommend 3" wide (or greater) stiles/rails. • This will provide more structural stability and help to prevent bowing which can open up gaps between the stiles/rails and the louver molding.
3	Minimum Sizes	Please reference the Louver Door Minimum Sizes chart on our website under: Resources > Technical Information > Technical Information . This chart will give you the minimum sizes for operable, non-operable and fixed louver door styles based on louver size.

Wood Species Options (Chapter S)





1	Style 1000 and 8000 Closed Louver Doors	For available wood species options for the solid wood raised panel, and the corresponding wood species used for the ¼" flat panel that the closed louvers attached to, please see Closed Louver Doors with Raised Panel - Wood Species Options chart on our website under Resources > Technical Information > Technical Information .
---	---	---

Closed Louver Doors - END

► For PRICING ► See Section **B.15** in our current Wholesale Pricing Catalog.


Drawer Front "Looks" - Compatible with $\frac{3}{4}$ " [19.1mm] Thick Doors

- These Drawer Front "Looks" are compatible with doors that are $\frac{3}{4}$ " [19.1mm] thick.
- When ordering you will need to determine which "Look" best suits your needs.
- Each "Look" has a code (ie: A - D) that is part of the drawer front style number (ie: 34SQA* or 300-32RPB* or 300-32RPC*).
- When placing your order, please indicate the code for the "Look", along with the RP Profile (*Section B.16*) and/or outside edge (*Section E.15*) when appropriate.

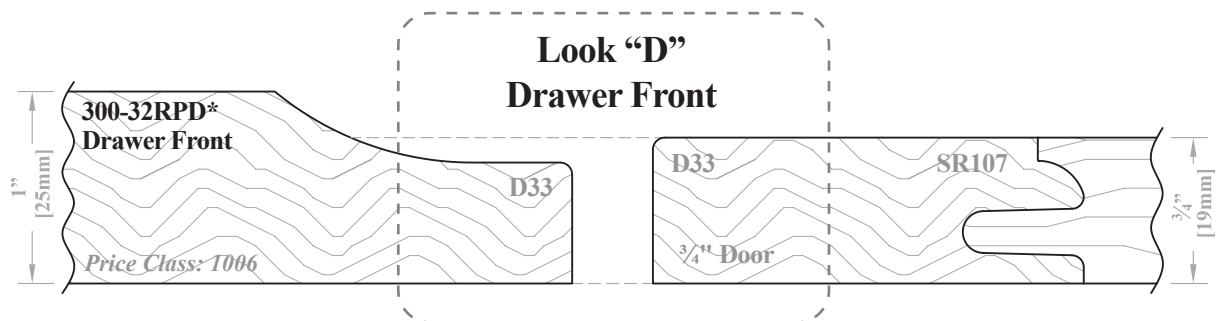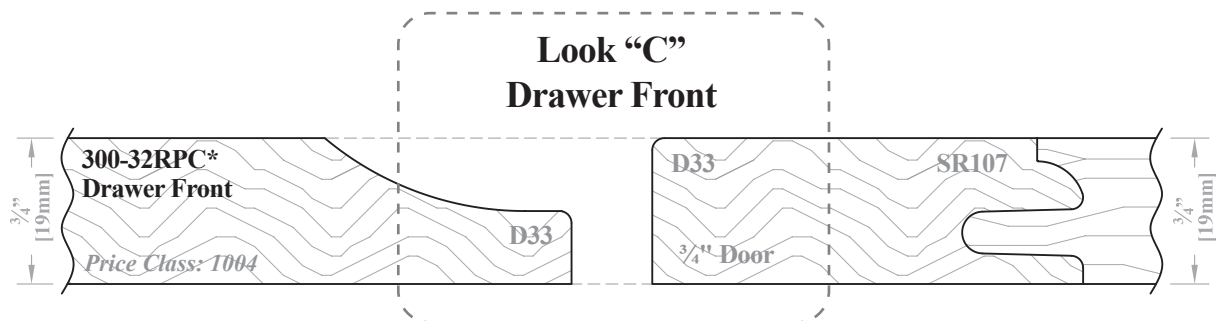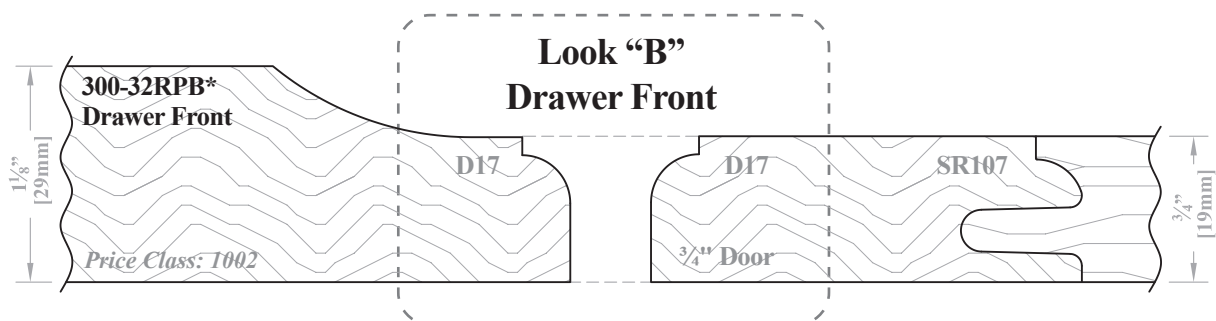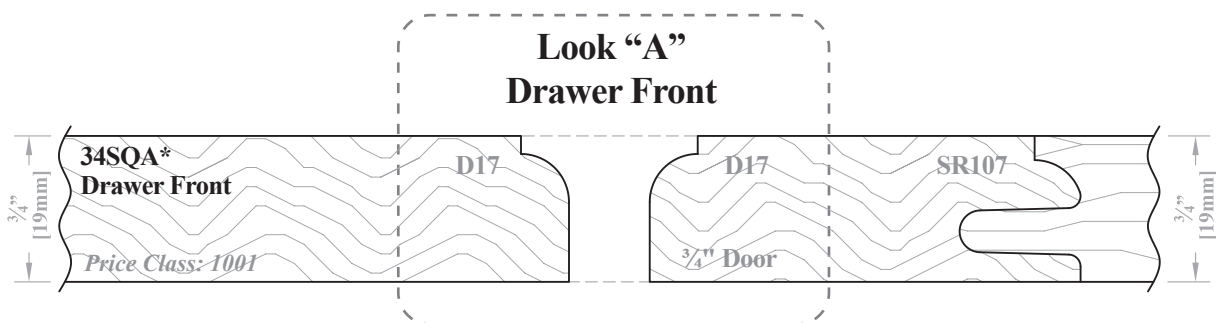


► For PRICING ► See Section **B.16** in our current Wholesale Pricing Catalog.

Slab & RP (Raised Panel) Drawer Front Styles




Style: 916SQA*
Drawer Front

PC: 1001
Frame: NA
Min. Size: 3x3




Style: 58SQA*
Drawer Front

PC: 1001
Frame: NA
Min. Size: 3x3




Style: 34SQA*
Drawer Front

PC: 1001
Frame: NA
Min. Size: 3x3
See Look "A"



Style: 100SQE*
Drawer Front

PC: 1003
Frame: NA
Min. Size: 3x3
See Look "E"






Style: RP*
Drawer Front

PC: Varies
Frame: NA
Min. Size: Varies
See Look "B, C, D, F & G"

Drawer Front "Looks" - Compatible with 1" [25.4mm] Thick Doors


- These Drawer Front "Looks" are compatible with doors that are 1" [25.4mm] thick.
- When ordering you will need to determine which "Look" best suits your needs.
- Each "Look" has a code (ie: E-G) that is part of the drawer front style number (ie: 100SQE* or 300-32RPF* or 300-32RPG*).
- When placing your order, please indicate the code for the "Look", along with the RP Profile (*Section B.16*) and/or outside edge (*Section E.15*) when appropriate.

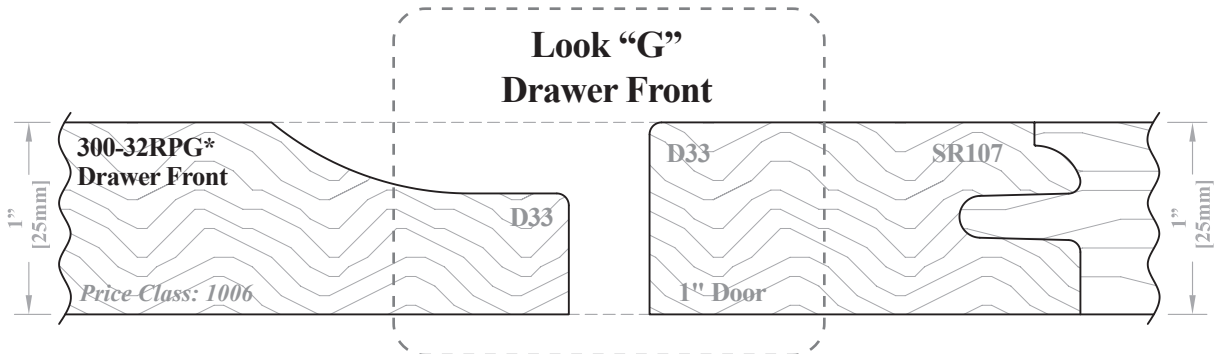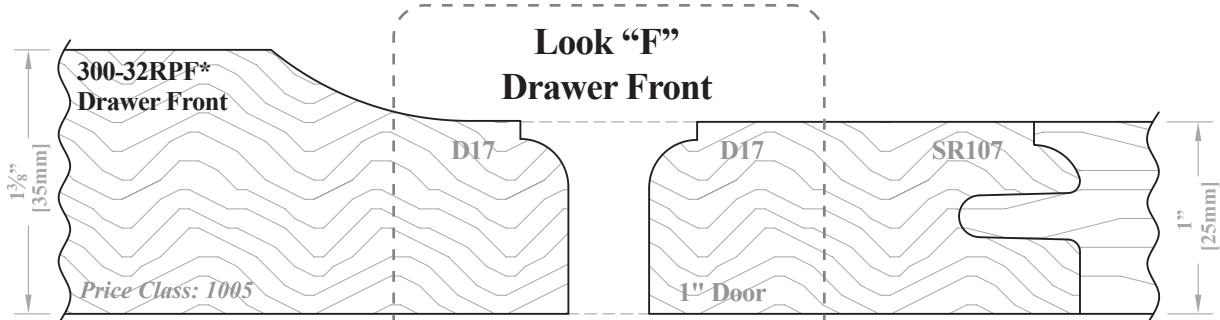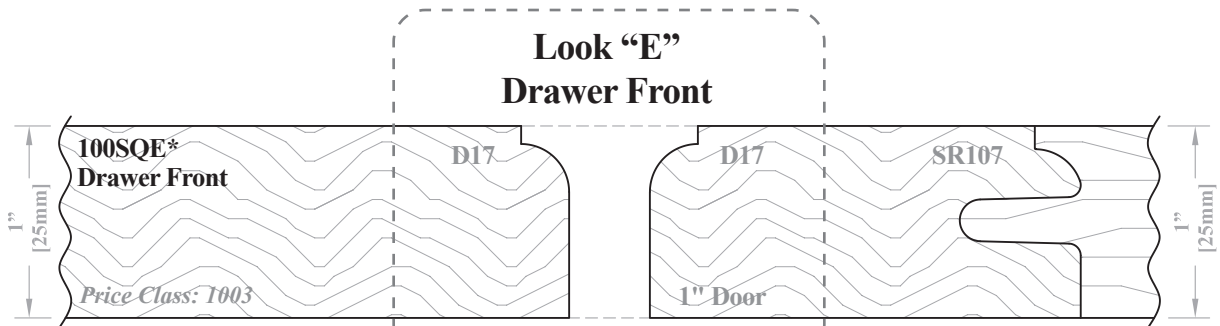

► For PRICING ► See Section B.16 in our current Wholesale Pricing Catalog.

Outside Edge Profiles for Raised Panel Drawer Fronts

Using outside edge profiles that simulate a raised panel “Look”, with a slab drawer front like Style 34SQA* or 100SQE*, is a more economical alternative than other raised panel drawer front “Looks” (ie: Look “B” or “C”) that require multiple router passes for manufacturing.











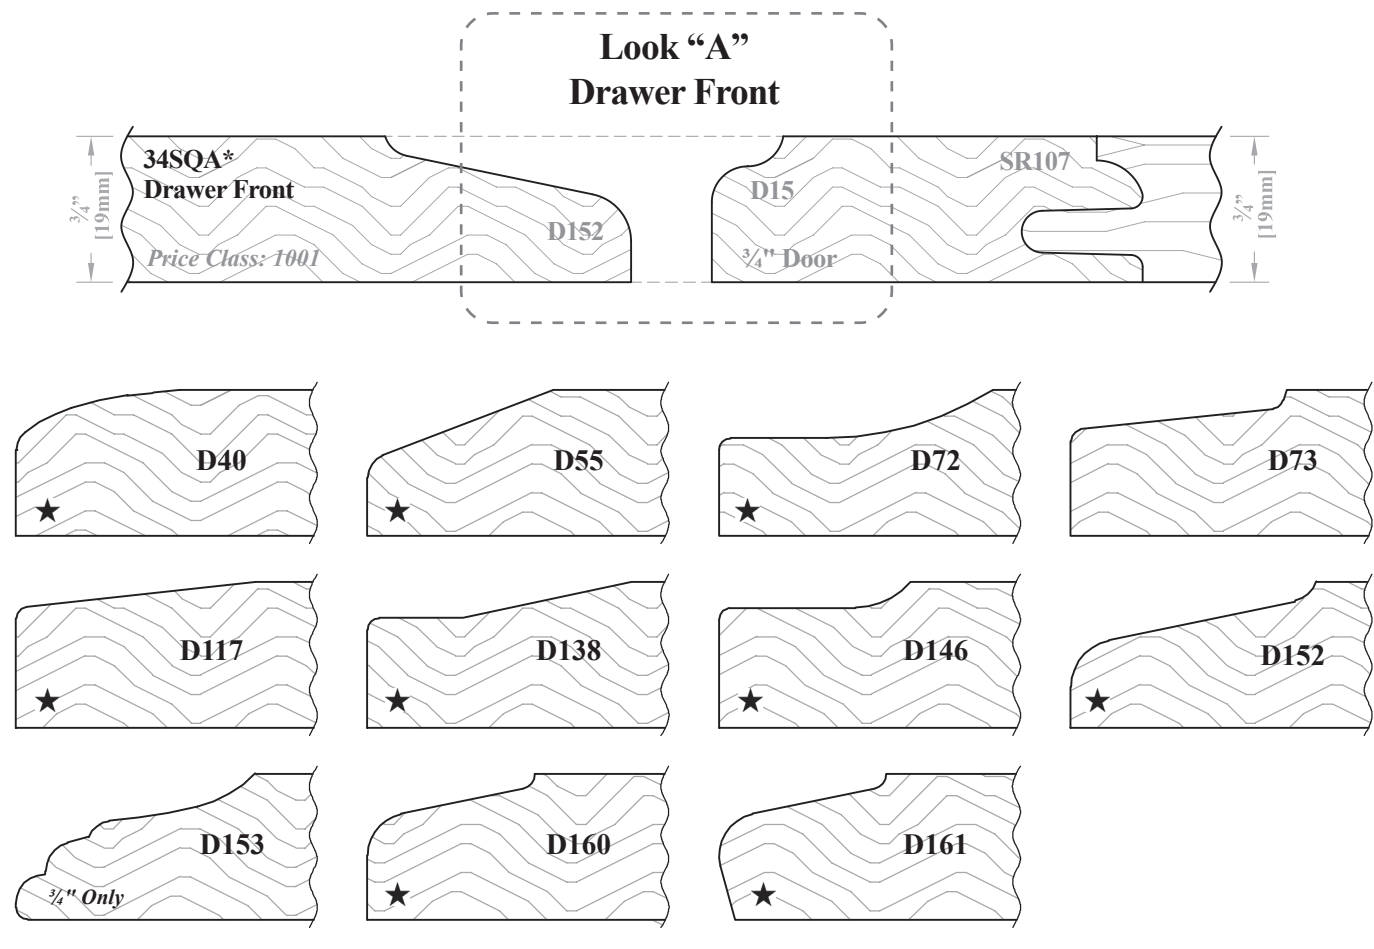


★ = Available on products using 3D Laminate (RTF).

► For PRICING ► See Section **B.16** in our current Wholesale Pricing Catalog.

Raised Panel Profiles for RP (Raised Panel) Drawer Fronts












B

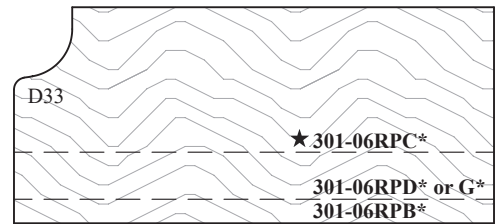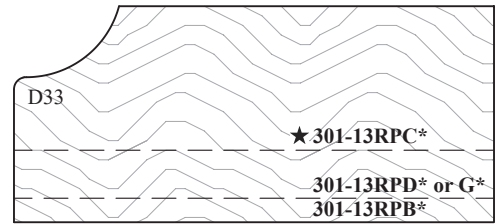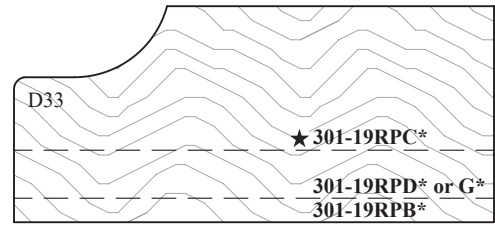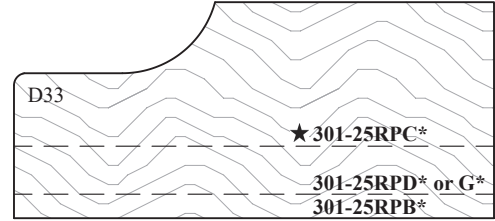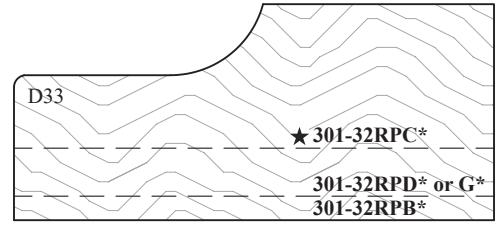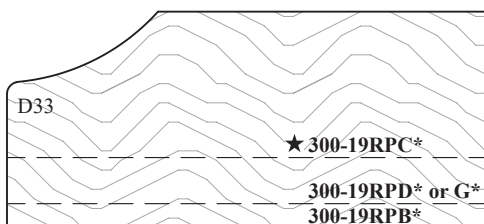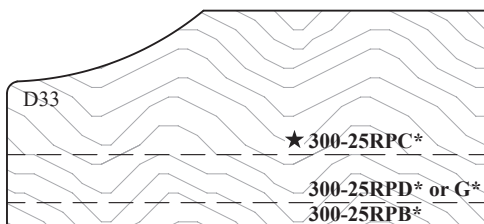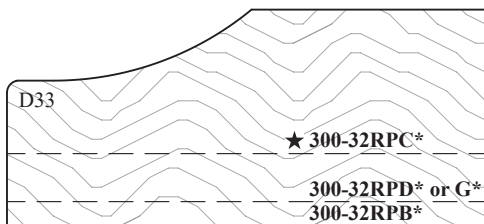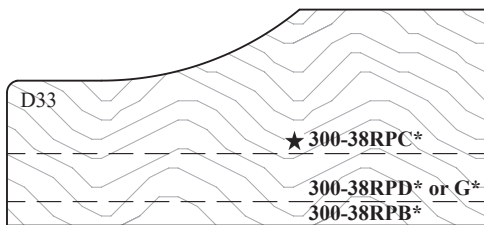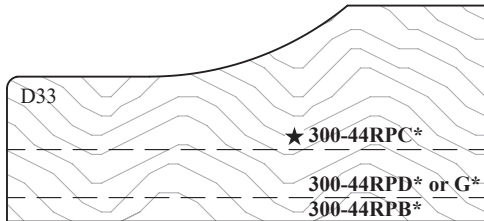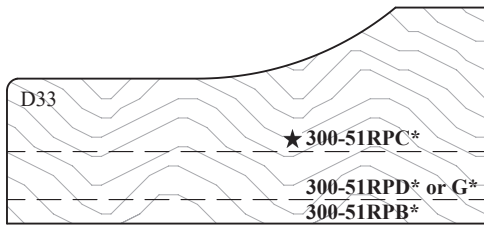

★ = Available on products using 3D Laminate (RTF).

Note: Dashed lines indicate difference in thickness from one look to another. Look “B” = 1⅝" [28.6mm], Look “D” or “G” = 1" [25.4mm], Look “C” = ¾" [19.1mm].

Raised Panel Profiles for RP (Raised Panel) Drawer Fronts

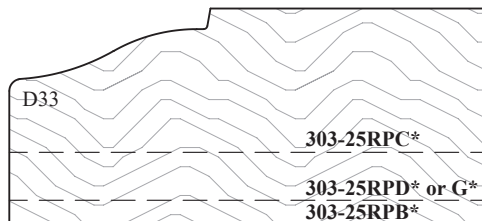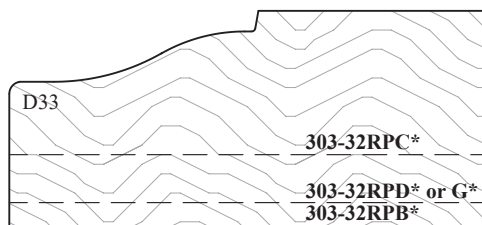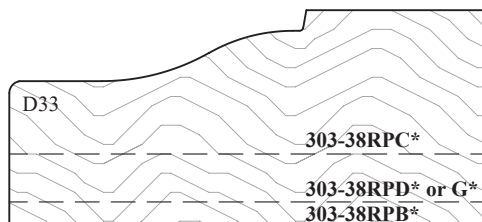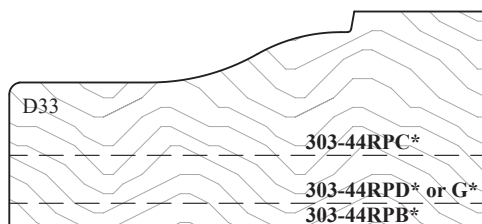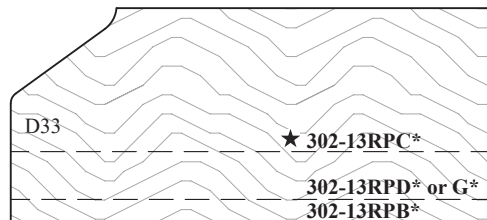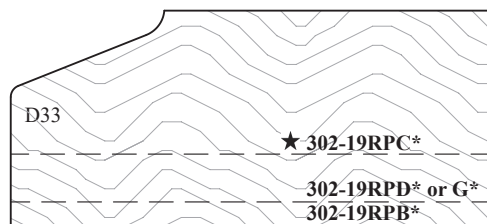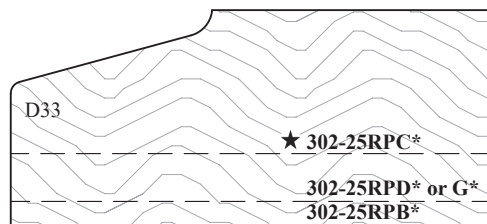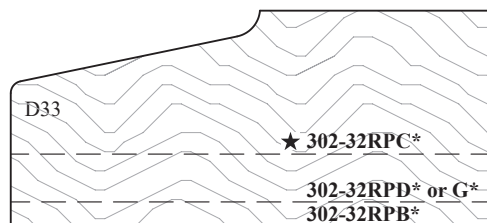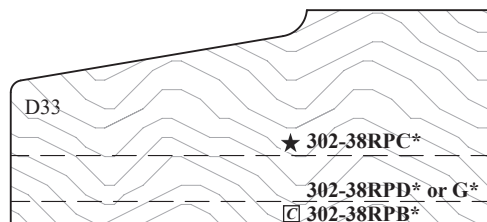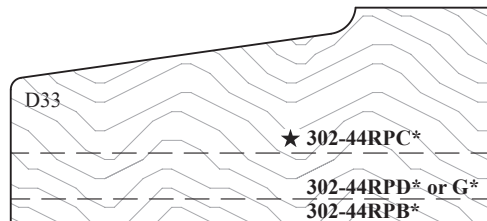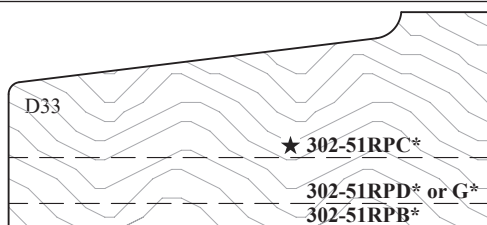











★ = Available on products using 3D Laminate (RTF).

☐ = Available for Convex/Concave Products.

Note: Dashed lines indicate difference in thickness from one look to another. Look "B" = 1 1/8" [28.6mm], Look "D" or "G" = 1" [25.4mm], Look "C" = 3/4" [19.1mm].

Raised Panel Profiles for RP (Raised Panel) Drawer Fronts

B

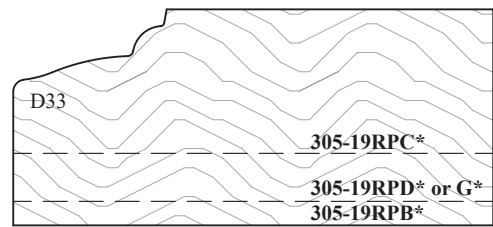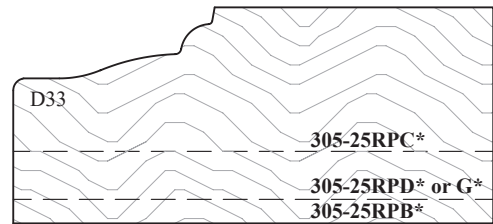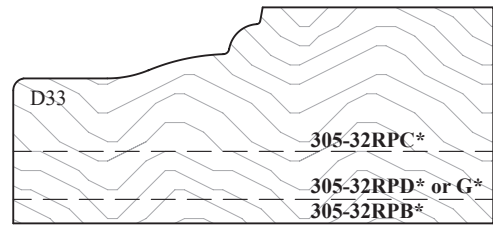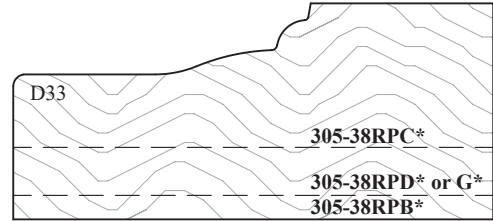
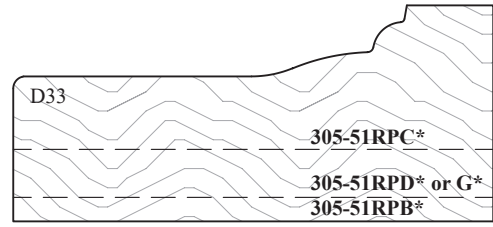
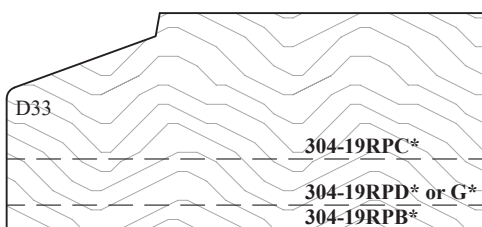
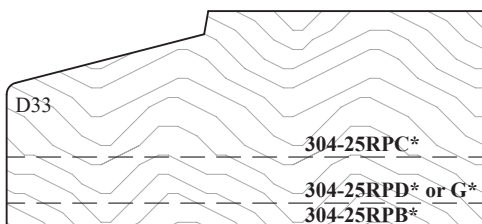
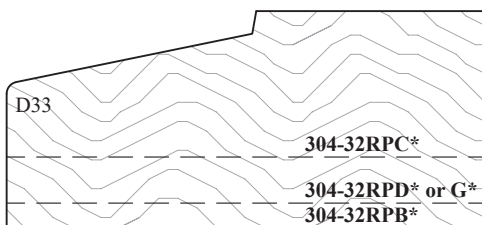
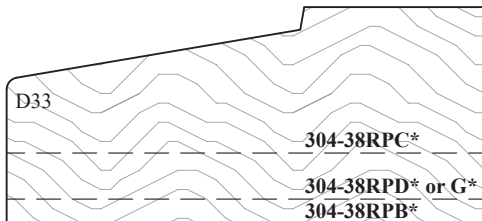
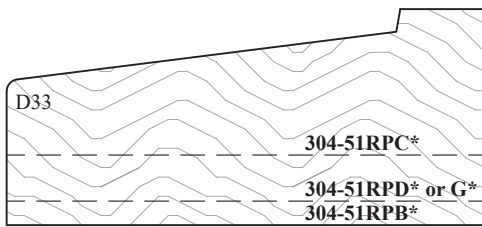


★ = Available on products using 3D Laminate (RTF).

Note: Dashed lines indicate difference in thickness from one look to another. Look "B" = 1½" [28.6mm], Look "D" or "G" = 1" [25.4mm], Look "C" = ¾" [19.1mm].

► For PRICING ► See Section **B.16** in our current Wholesale Pricing Catalog.

Raised Panel Profiles for RP (Raised Panel) Drawer Fronts







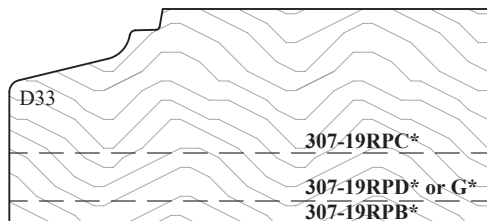
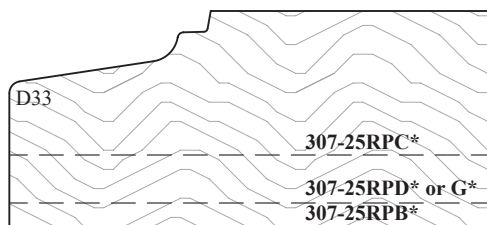
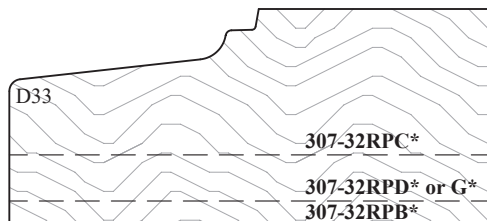
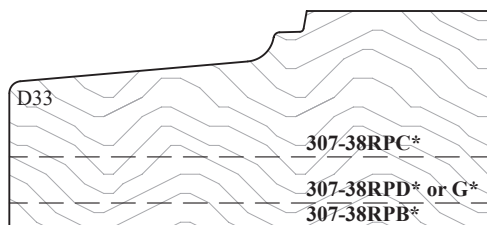
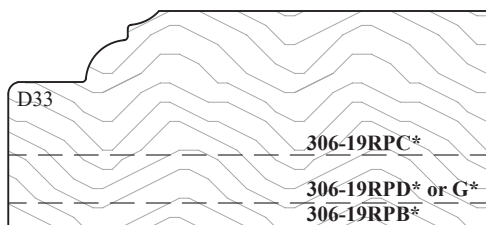
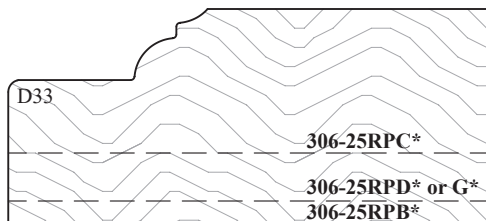
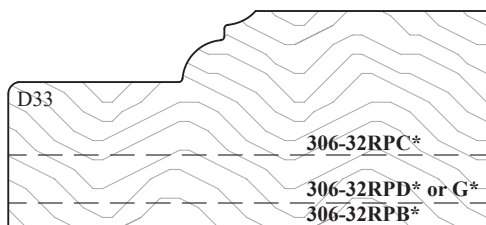


★ = Available on products using 3D Laminate (RTF).

► For PRICING ► See Section **B.16** in our current Wholesale Pricing Catalog.

Raised Panel Profiles for RP (Raised Panel) Drawer Fronts













B

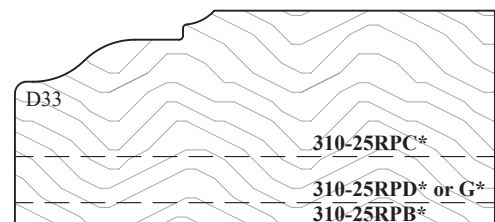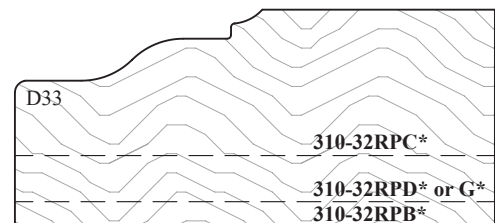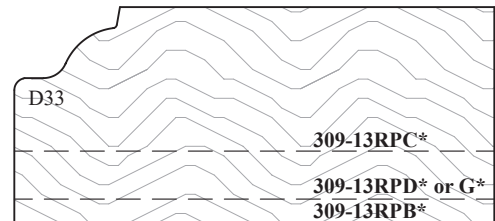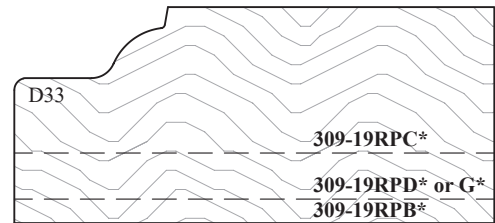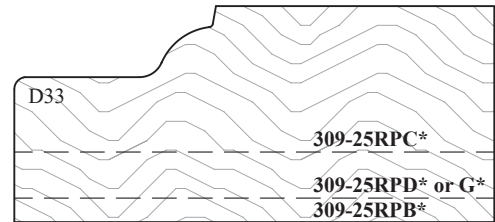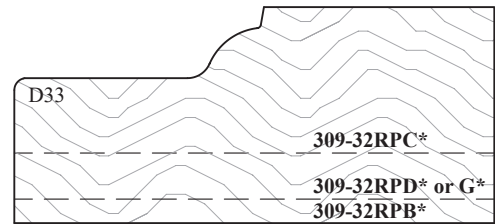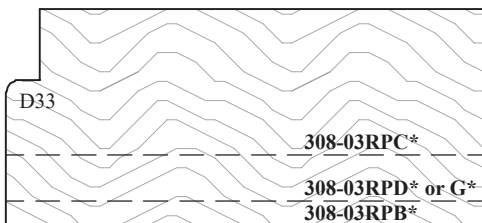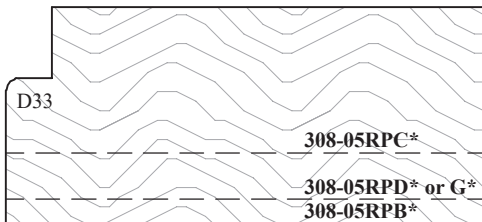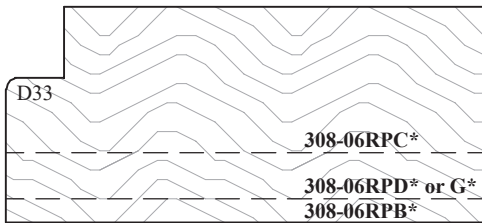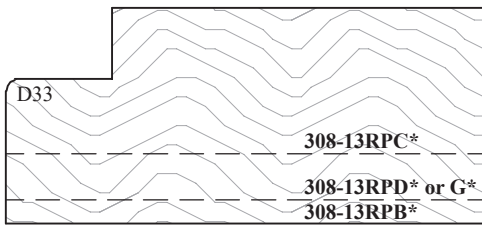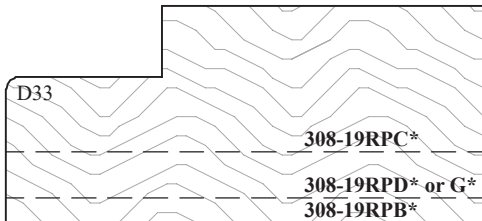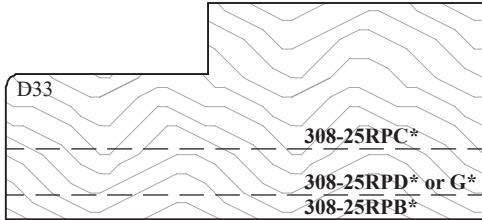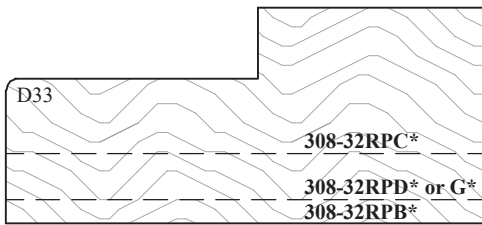

★ = Available on products using 3D Laminate (RTF).

Note: Dashed lines indicate difference in thickness from one look to another. Look “B” = 1½" [28.6mm], Look “D” or “G” = 1" [25.4mm], Look “C” = ¾" [19.1mm].

Raised Panel Profiles for RP (Raised Panel) Drawer Fronts

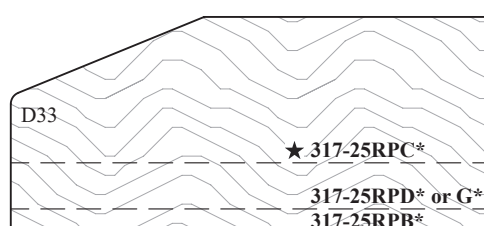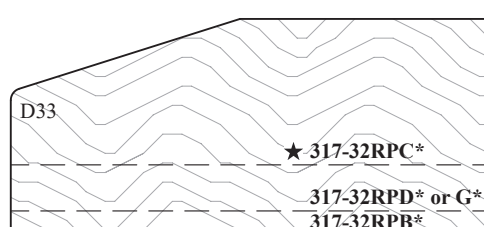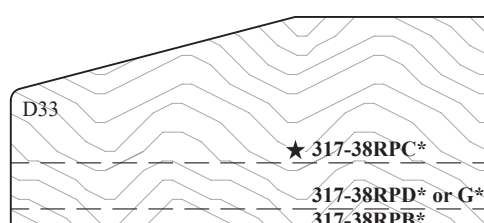
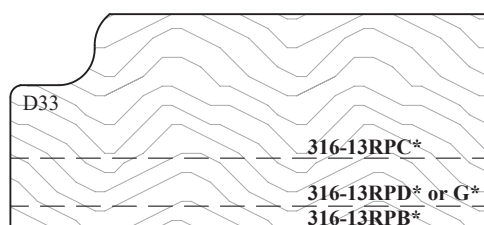
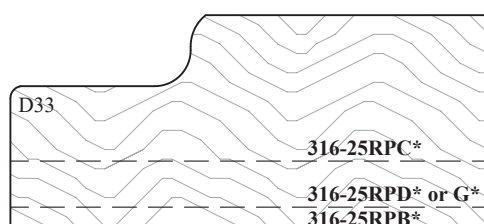
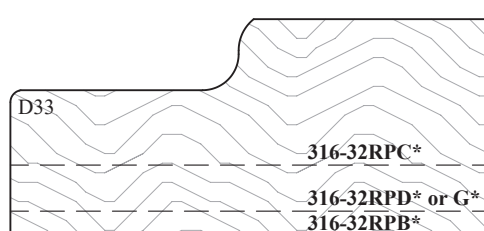
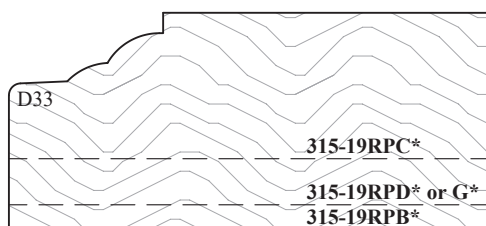
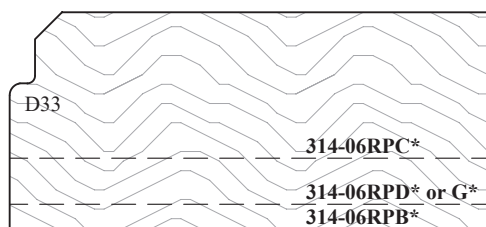
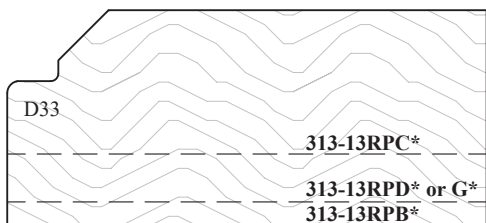
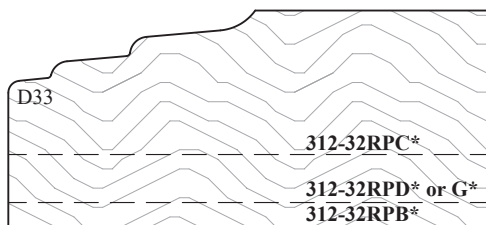
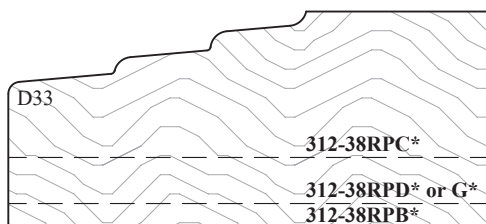
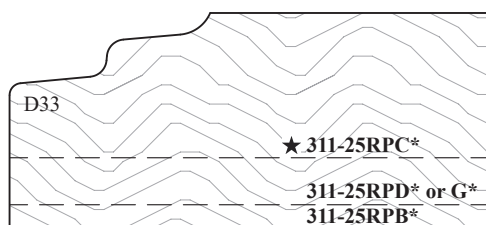


Note: Dashed lines indicate difference in thickness from one look to another. Look "B" = 1 1/8" [28.6mm], Look "D" or "G" = 1" [25.4mm], Look "C" = 3/4" [19.1mm].

► For PRICING ► See Section **B.16** in our current Wholesale Pricing Catalog.

Raised Panel Profiles for RP (Raised Panel) Drawer Fronts

B



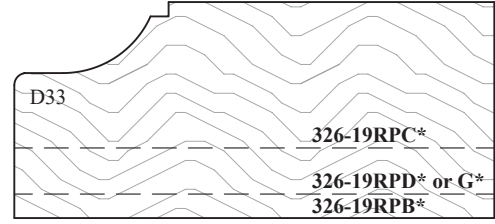
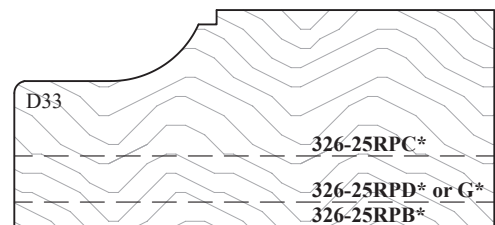
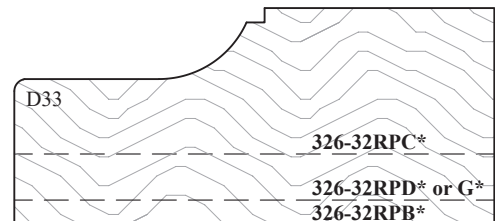
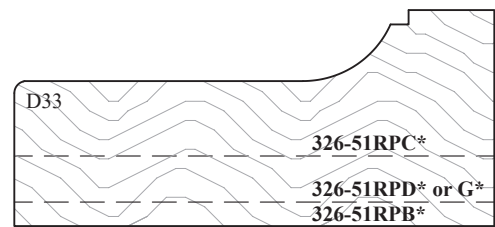
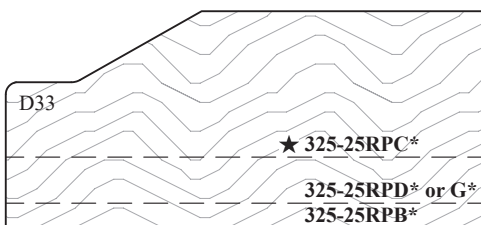
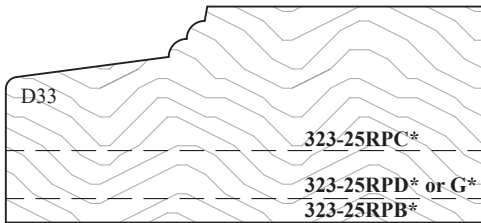
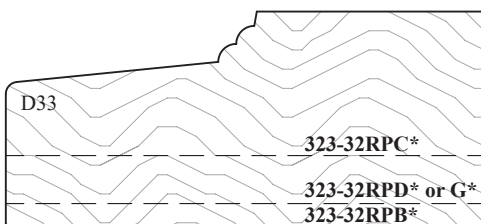
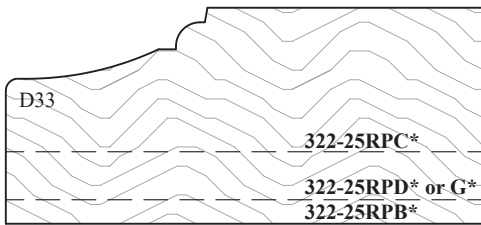
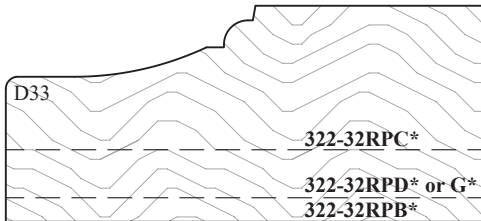
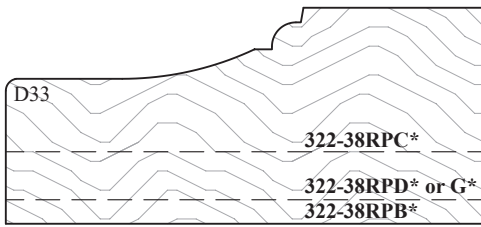


★ = Available on products using 3D Laminate (RTF).

Note: Dashed lines indicate difference in thickness from one look to another. Look "B" = 1 1/8" [28.6mm], Look "D" or "G" = 1" [25.4mm], Look "C" = 3/4" [19.1mm]. Some Look "B" profiles shown on this page are 15/16" [23.8mm] thick.

► For PRICING ► See Section B.16 in our current Wholesale Pricing Catalog.












Raised Panel Profiles for RP (Raised Panel) Drawer Fronts

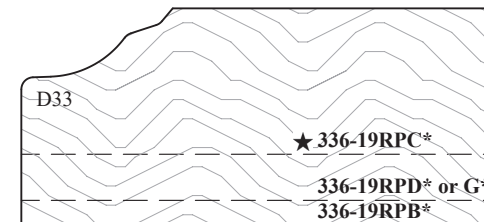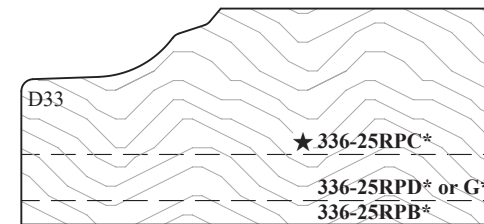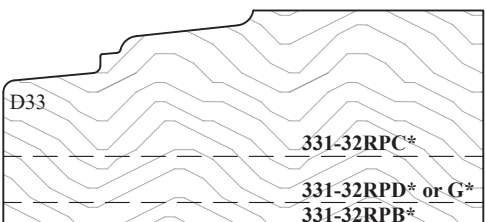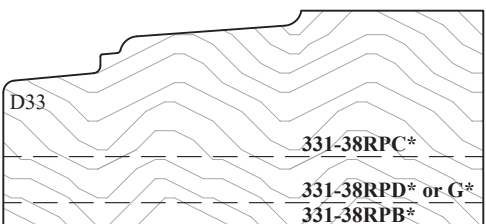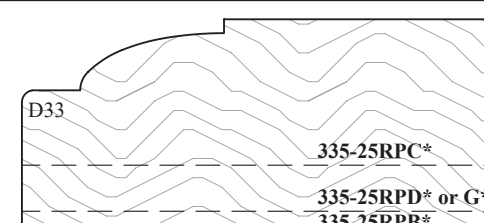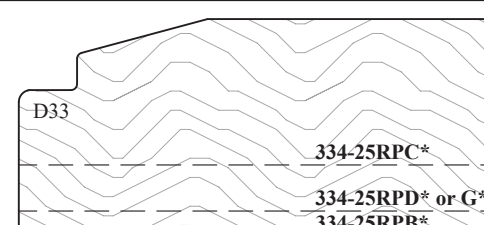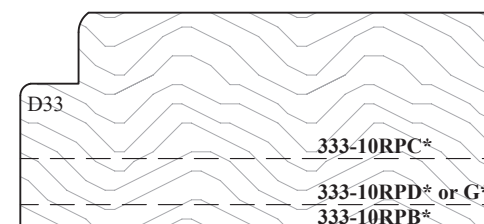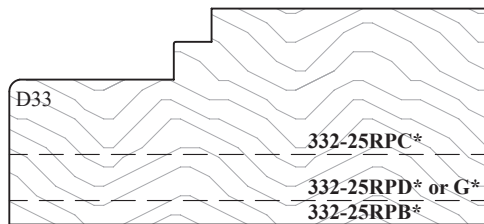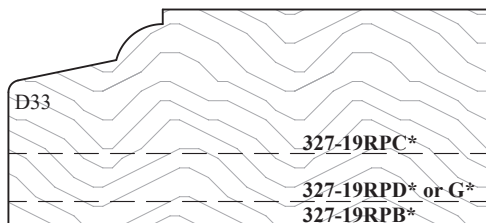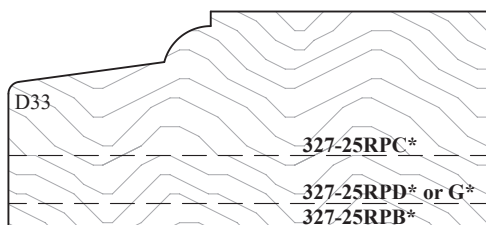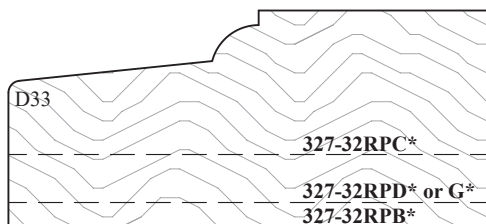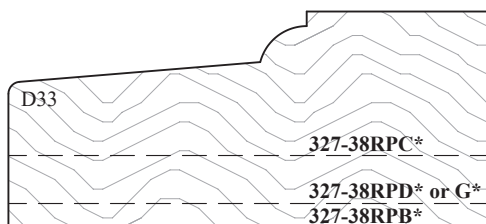

Note: Dashed lines indicate difference in thickness from one look to another. Look "B" = 1 $\frac{1}{8}$ " [28.6mm], Look "D" or "G" = 1" [25.4mm], Look "C" = $\frac{3}{4}$ " [19.1mm]. Some Look "B" profiles shown on this page are $\frac{15}{16}$ " [23.8mm] thick.

Raised Panel Profiles for RP (Raised Panel) Drawer Fronts








B

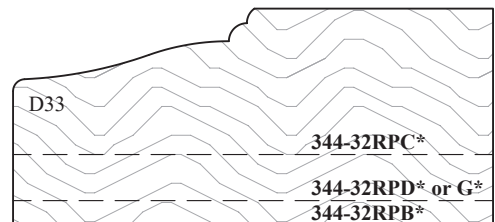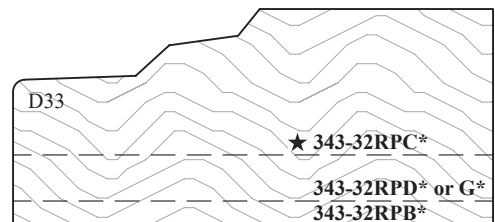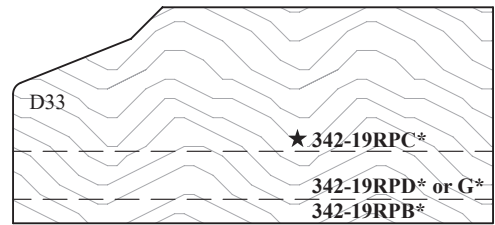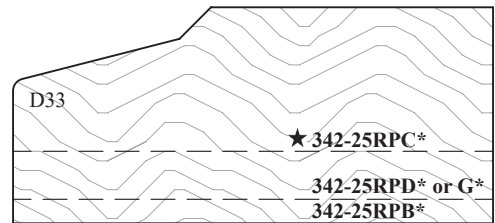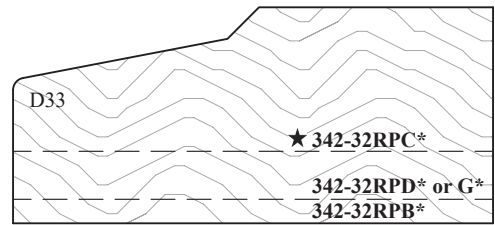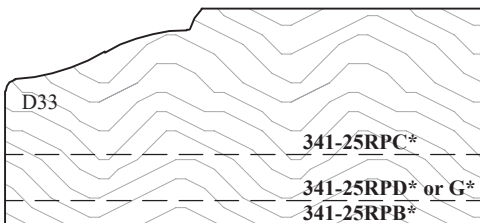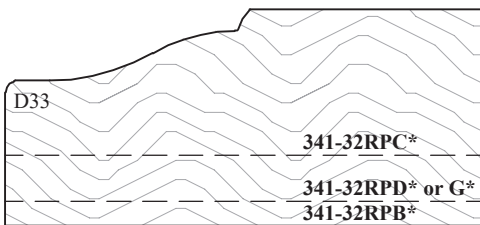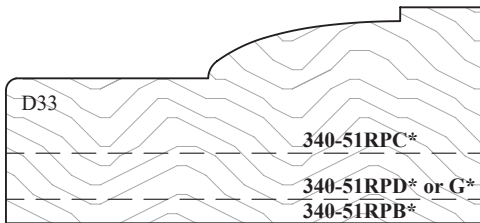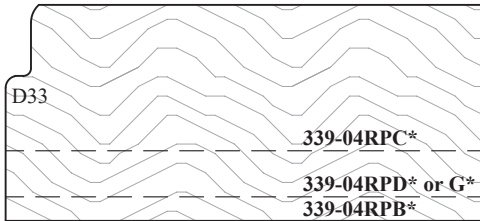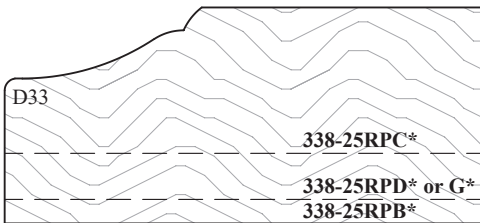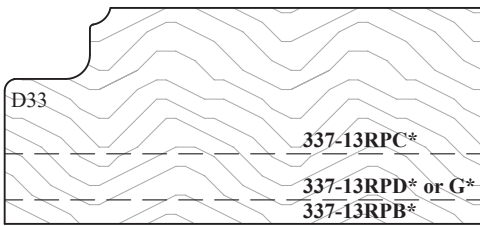

★ = Available on products using 3D Laminate (RTF).

► For PRICING ► See Section B.16 in our current Wholesale Pricing Catalog.

Raised Panel Profiles for RP (Raised Panel) Drawer Fronts

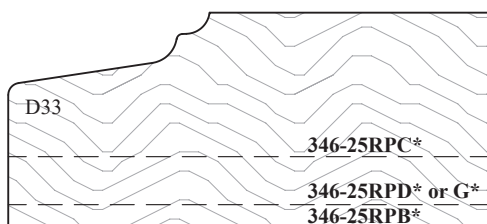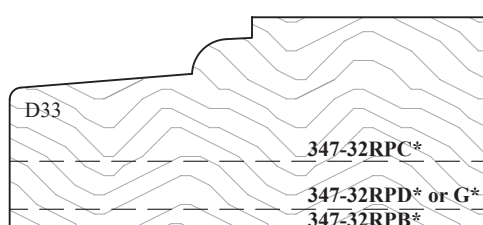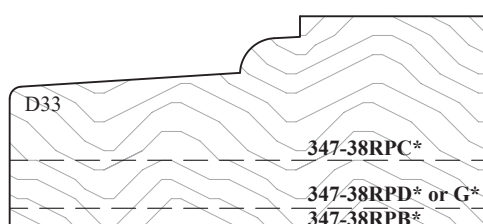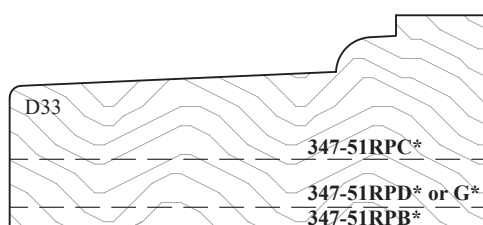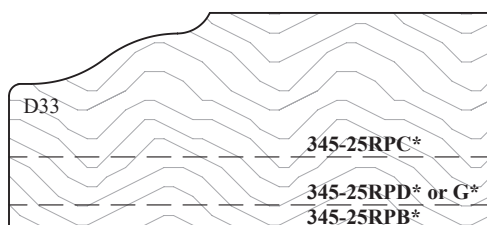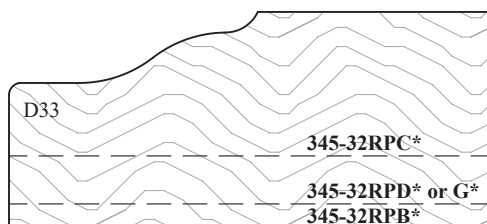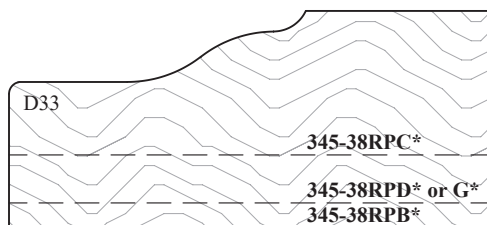









★ = Available on products using 3D Laminate (RTF).

Note: Dashed lines indicate difference in thickness from one look to another. Look “B” = 1⅞" [28.6mm], Look “D” or “G” = 1" [25.4mm], Look “C” = ¾" [19.1mm].

► For PRICING ► See Section **B.16** in our current Wholesale Pricing Catalog.

Raised Panel Profiles for RP (Raised Panel) Drawer Fronts

B

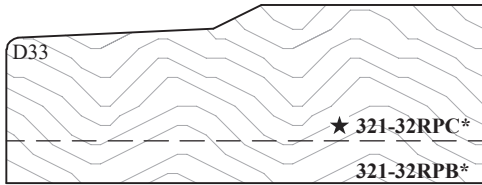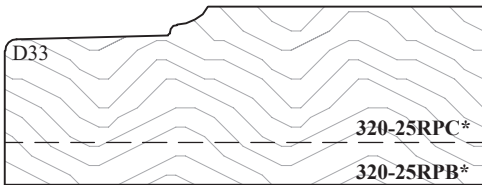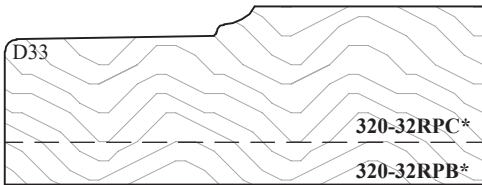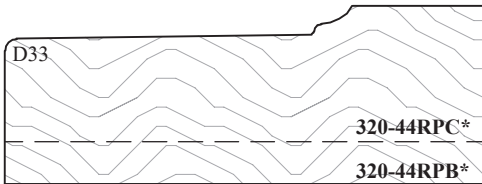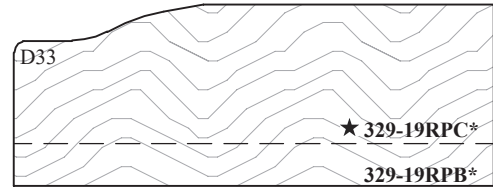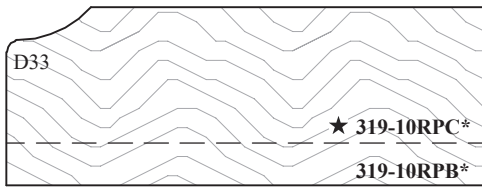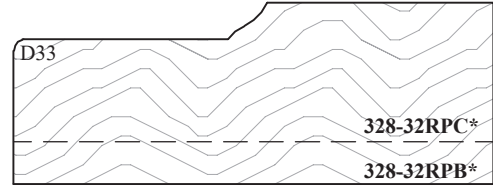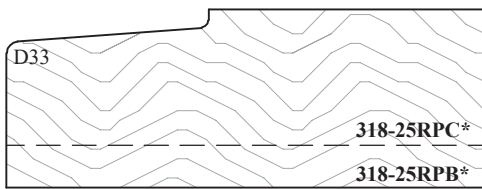


★ = Available on products using 3D Laminate (RTF).

Note: Dashed lines indicate difference in thickness from one look to another. Look "B" = $\frac{1}{16}$ " [23.8mm], Look "C" = $\frac{3}{4}$ " [19.1mm]. Door style 1271 and drawer front style 1271* from Section B.9 are only available with these $\frac{1}{16}$ " [23.8mm] thick Look "B" profiles.

► For PRICING ► See Section B.16 in our current Wholesale Pricing Catalog.

Minimum Size Drawer Front Calculation

- The minimum sizes for drawer fronts are calculated using the *Raised Panel Profile Reveal* and the *Outside Edge Profile Width*, while maintaining a 1" [25.4mm] minimum of flat to the face.
- Dimensions for raised panel profile reveals and outside edge profiles can be found on the compatibility chart on our website under Technical Information.

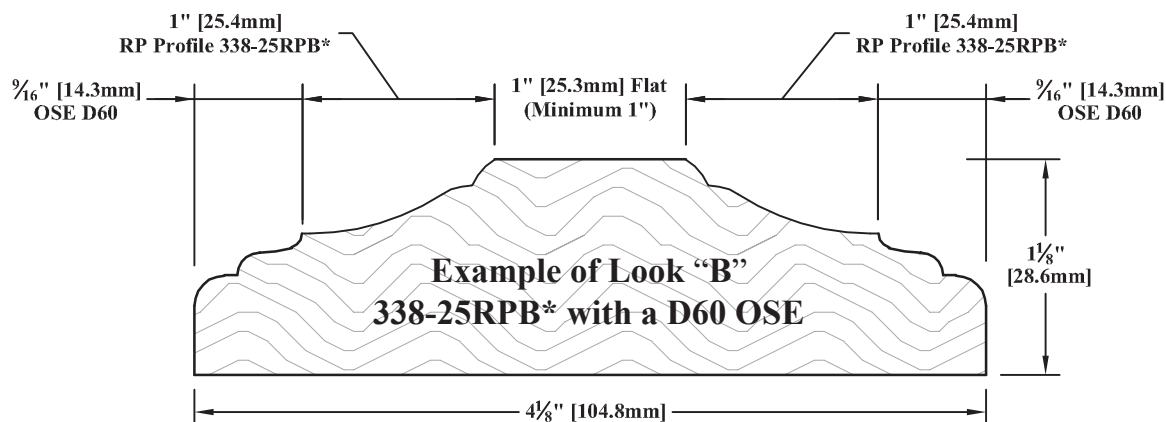

Example per drawing: (D60 @ $\frac{1}{16}$ " x 2 = $1\frac{1}{8}$ ") + (338-25RPB* @ 1" x 2 = 2") + (1" Flat) = $4\frac{1}{8}$ "

Ordering & Pricing Notes: Slab & RP (Raised Panel) Drawer Fronts

Ordering Guidelines

- | | | |
|---|-------------|---|
| 1 | Order Forms | Please use <i>Drawer Front Order Form (E-Z Form #3)</i> . |
|---|-------------|---|

Pricing

- | | | |
|---|---------|--|
| 1 | Pricing | Please see <i>Section B.16</i> of our current Wholesale Pricing Catalog . |
|---|---------|--|

Technical Notes: Slab & RP (Raised Panel) Drawer Fronts

Cabinet Door & Drawer Front Options (Chapter B)

- | | | |
|---|-----------------------|---|
| 1 | Style 916SQA*, 58SQA* | Style 916SQA* is only available when using one of the $\frac{1}{16}$ " <i>Only [14mm]</i> Outside Edge Applied Molding profiles from <i>Section E.16</i> .
Style 58SQA* is only available when using one of the $\frac{3}{8}$ " <i>Only [15.9mm]</i> Outside Edge Applied Molding profiles from <i>Section E.16</i> .
MDF core is recommended when using these drawer front styles with applied molding due to expansion and contraction issues that may occur. |
| 2 | Style 34SQA* | See Look "A" on <i>page B.16.1</i> . |
| 3 | RP Drawer Fronts | See the Drawer Front "Look" options that are available on <i>pages B.16.1 & B.16.2</i> .
Standard raw MDF Raised Panel (RP) drawer fronts are available in all Drawer Front "Looks". |

Convex/Concave Options (Chapter D)

- | | | |
|---|-----------------|--|
| 1 | Curved Products | The  indicates drawer front styles that are available for Curved Products. For additional ordering guidelines, see <i>Chapter D</i> . |
|---|-----------------|--|

Functional Options (Chapter F)

- | | | |
|---|--------------|--|
| 1 | Hinge Boring | 35mm hinge boring is available with Drawer Front Looks "A", "B", "E" and "F". Please see <i>Section F.1</i> for additional hinge boring requirements, ordering instructions and compatibility.
For Drawer Front Looks "C", "D" and "G" please submit your request to our Customer Support Team. |
|---|--------------|--|

Material Options

- | | | |
|---|------------|---|
| 1 | Raw MDF-MR | Raw MDF-MR is only available with Drawer Front Look "A" and Look "C". |
|---|------------|---|

Continued on next page...

► For PRICING ► See *Section B.16* in our current Wholesale Pricing Catalog.

Technical Notes: Drawer Fronts (Slab & RP)...continued

General Information (Chapter A)

1	Grain Direction	Arrows (↔) shown throughout the catalog indicate standard grain direction. Grain direction may be specified at NO additional cost.
2	Warranty	Please see <i>Section A.8 - Warranties</i> for more information on Glued-Up Panel expansion/contraction, warping, bowing and twisting.

Profile Options (Chapter E)

1	Look "C"	Outside edge thickness may vary by 5mm depending on the drawer front profile selected. Please refer to our website for more information.
2	Outside Edge Profiles	Most drawer front profiles are shown with a D33 Outside Edge. Outside edge profiles can simulate a raised panel "Look" on a style 34SQA*. • Economical alternative - 1 router pass versus multiple passes. • Design flexibility is not an option. Additional information for Outside Edge Profiles can be found on our website under Technical Information.
3	Raised Panel (RP) Style Drawer Front Profiles	You must choose an RP " Look ", a Raised Panel Profile, and an Outside Edge Profile when ordering RP (Raised Panel) Drawer Fronts. The Raised Panel Profile # and the " Look " option define the Style # for your RP Drawer Front.

Sizes/Dimensions

1	Minimum Size	See previous page for minimum size calculations for RP drawer fronts. 916SQA*, 58SQA*, 34SQA*, 100SQA* & 500* = 3" x 3" [76.2mm x 76.2mm].
2	Maximum Height	Maximum height for a glued up, solid wood drawer front with horizontal grain is 48" [1219.2mm].
3	Drawer Front Construction	Drawer fronts up to 6" [152.4mm] high will be constructed with no glue ups whenever possible. This does not apply to Paint/Budget/Value, Rustic and Knotty Grades of material.
4	Thicknesses	Slab and RP (Raised Panel) drawer fronts made from solid wood are available $\frac{1}{8}$" [14.3mm], $\frac{5}{8}$" [15.9mm], $\frac{3}{4}$" [19.1mm], 1" [25.4mm], $1\frac{1}{8}$" [28.6mm] and $1\frac{3}{8}$" [34.9mm] thick. See <i>Section S.3</i> for possible thickness restrictions based on wood species. Not all drawer fronts are available in all thicknesses. See pages B.16.1 and B.16.2 for Price Classes (PC) and their associated thicknesses. $1\frac{3}{8}$" thickness for standard raw MDF drawer fronts is achieved by laminating two layers together.

Slab & RP (Raised Panel) Drawer Fronts - END

► For PRICING ► See Section **B.16** in our current Wholesale Pricing Catalog.

Cabinet Door & Drawer Front Options

Drawer Fronts - Molded


B

Molded Drawer Fronts may be ordered in these configurations:

Molding #	8' Length	PCTH (Precision Cut to Height) Please Specify Height Minimum Height		PCTL (Precision Cut to Length) Please Specify Length (Width)	PCTS (Precision Cut to Size) Please Specify Length (Width) and Height
1177*	Yes	Yes	5¾" [146.1mm]	Yes	Yes
1365*	Yes	* No	Fixed at 6¾" [171.5mm]	Yes	* No
1366*	Yes	* No	Fixed at 6¾" [171.5mm]	Yes	* No
1738*	Yes	Yes	5½" [139.7mm]	Yes	Yes
2158*	Yes	Yes	4½" [114.3mm]	Yes	Yes
2159*	Yes	Yes	6½" [165.1mm]	Yes	Yes

* Molding #1365* and #1366* cannot be trimmed in height.

The minimum length for Cut-to-Length pieces is 3" [76.2mm]. For ordering, please use *Molding & Miscellaneous Order Form (E-Z Form #5)*.

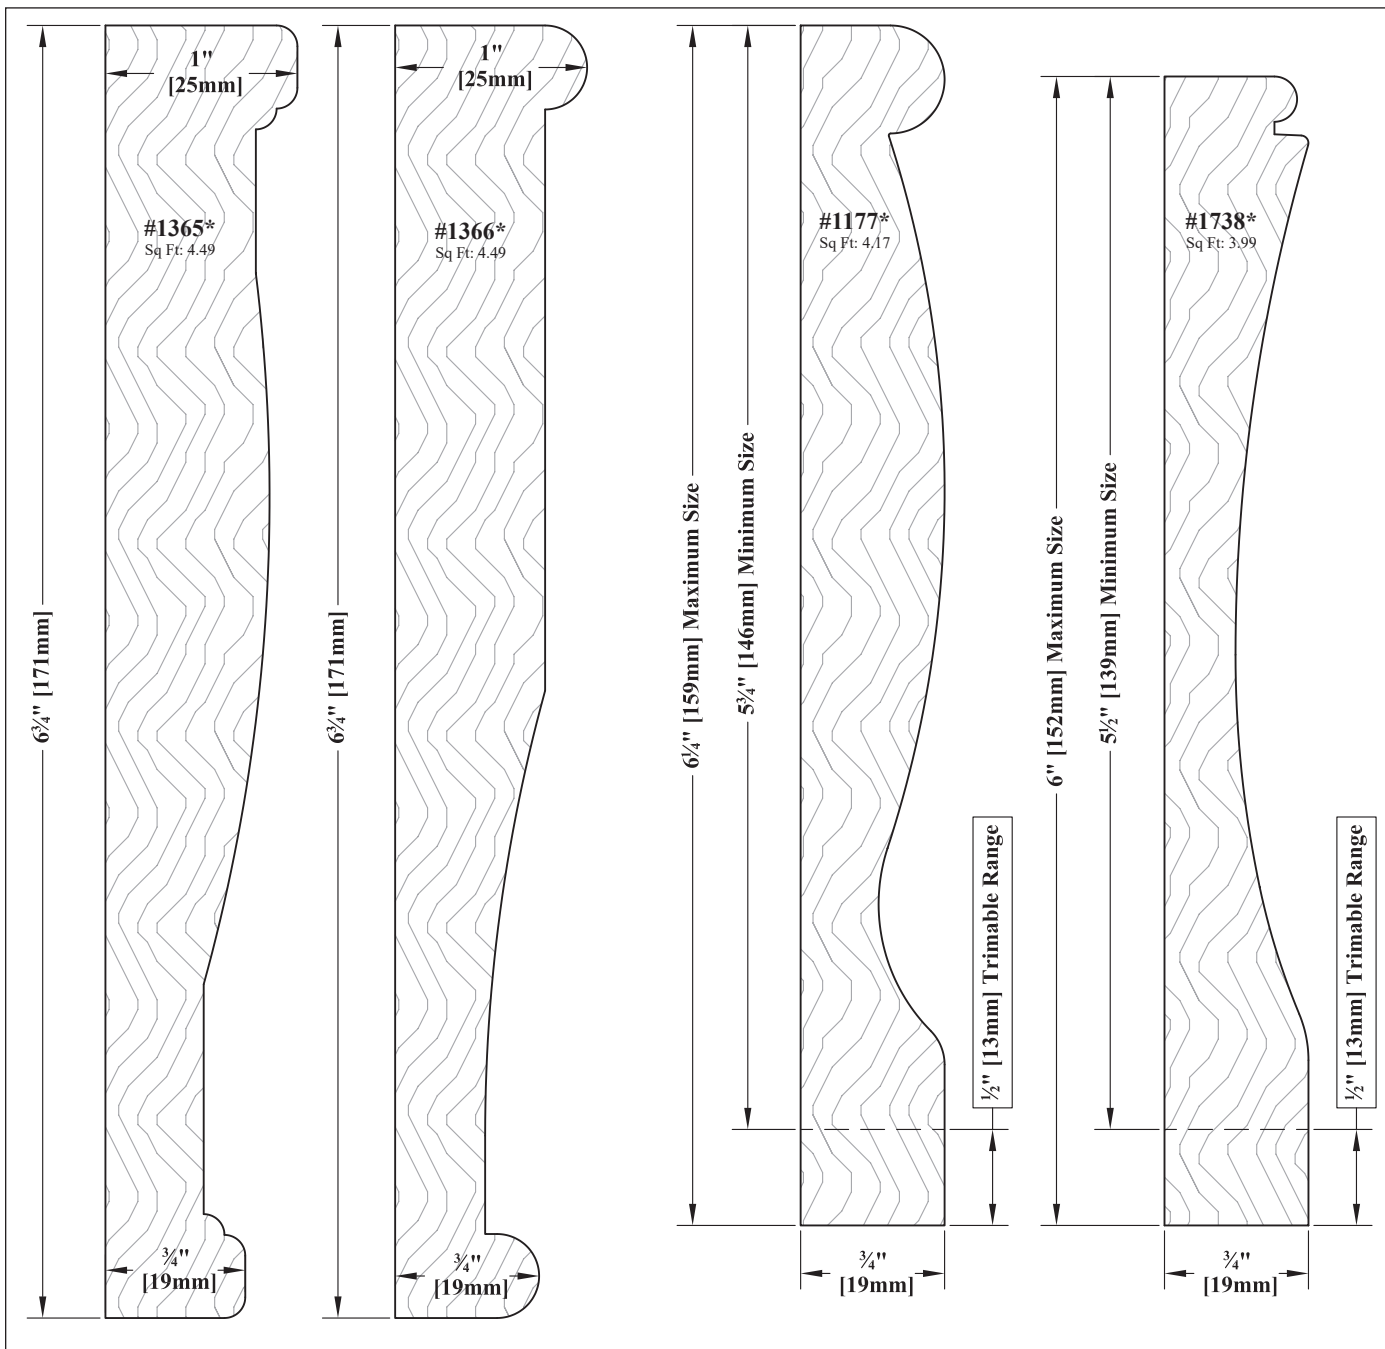

► For PRICING ► See Section B.17 in our current Wholesale Pricing Catalog.

B.17.1
V18.2




WalzCraft.com



(Phone) 1-800-237-1326

6:00AM - 5:30PM CST


(24 Hour Fax) 1-608-781-3667

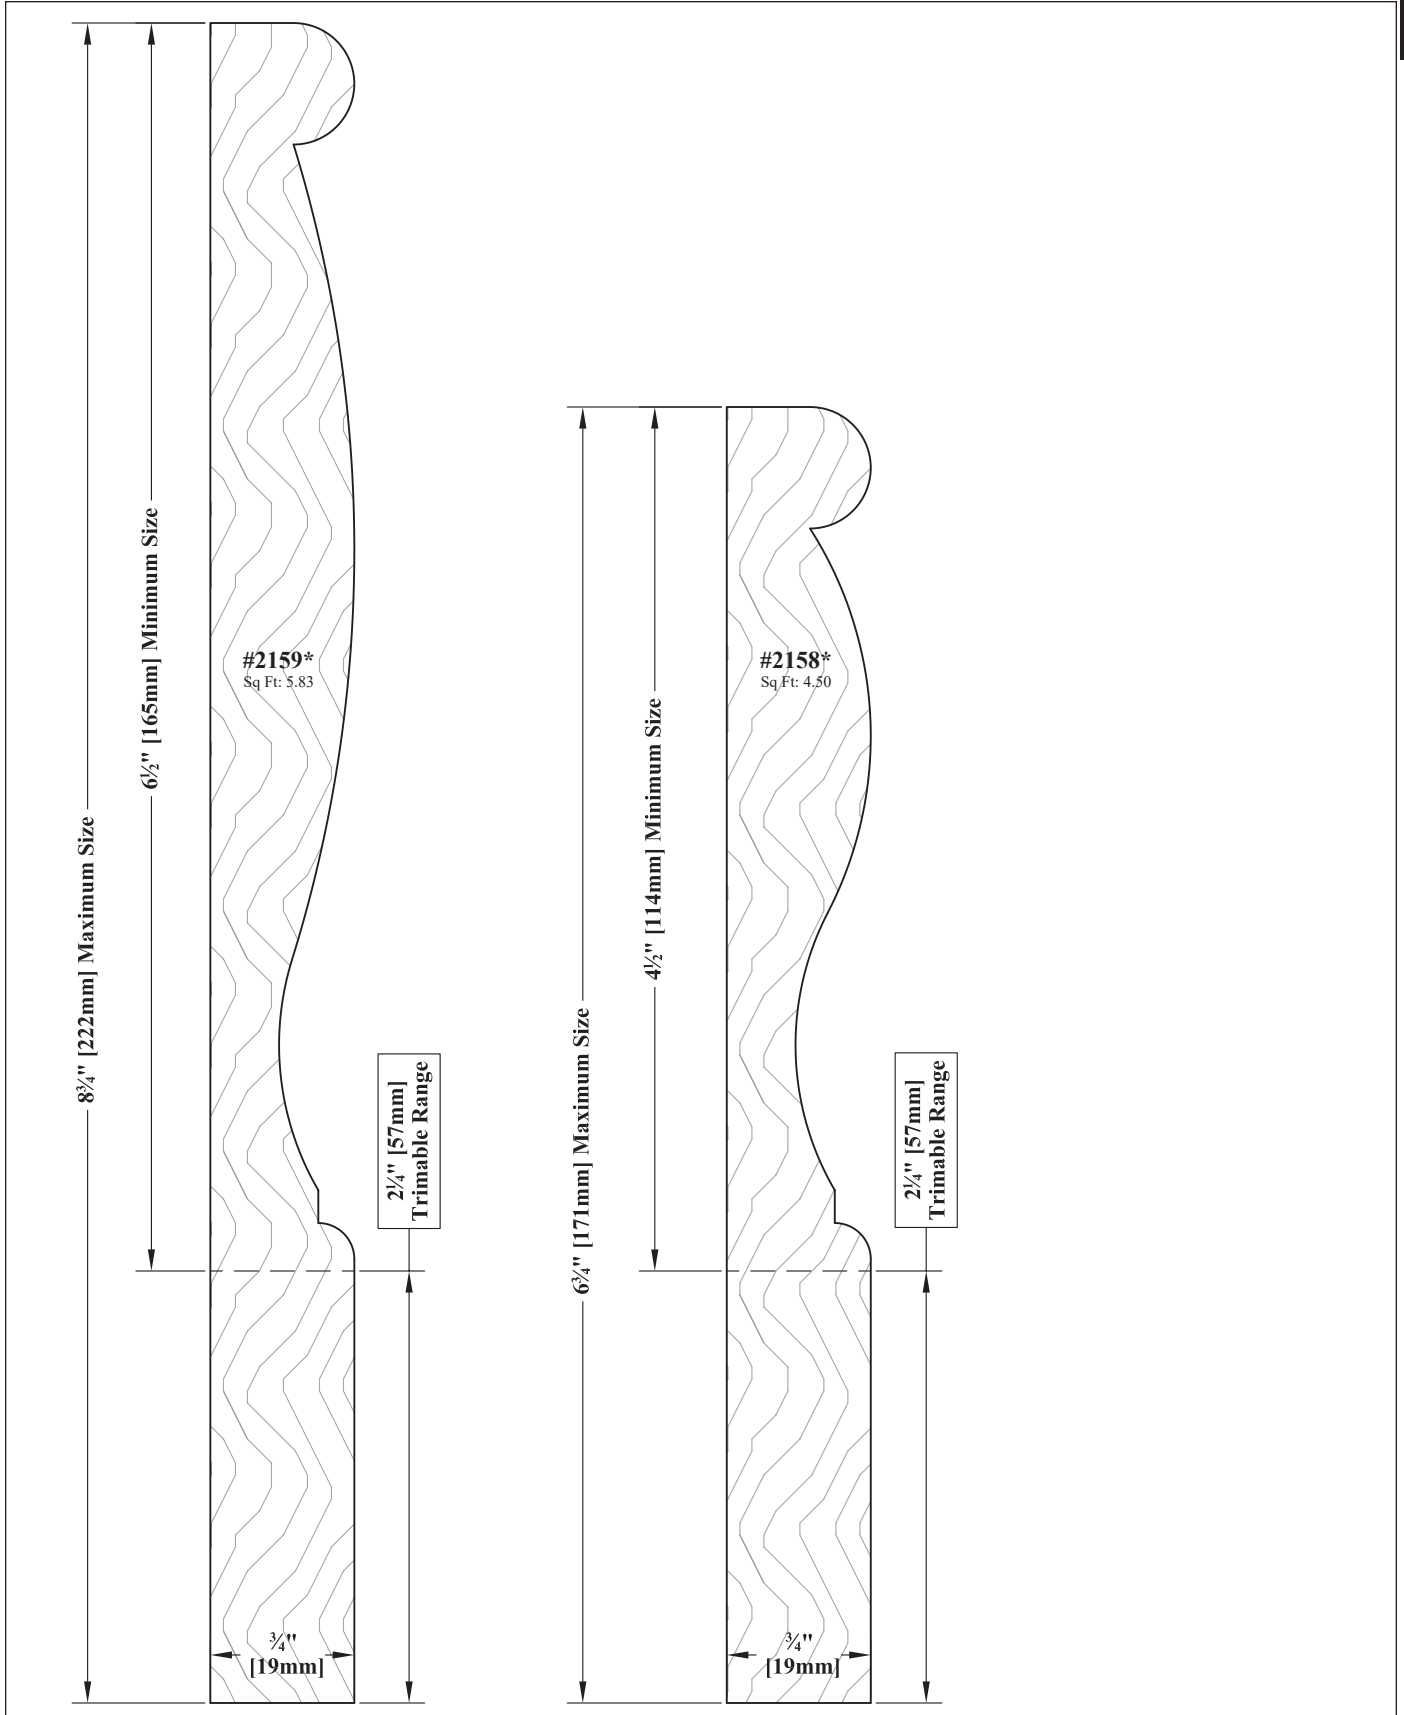


► For PRICING ► See Section B.17 in our current Wholesale Pricing Catalog.

Onlay Frames

An **Onlay Frame** is a frame with no panel cut that simulates a frame only door that can be applied to the backs of islands or peninsulas or on cabinet ends, or placed on walls to create a custom wainscot panel look. They come $\frac{3}{8}$ " [9.5mm] thick, and use the same construction methods as that of our Mitered and French Mitered doors.

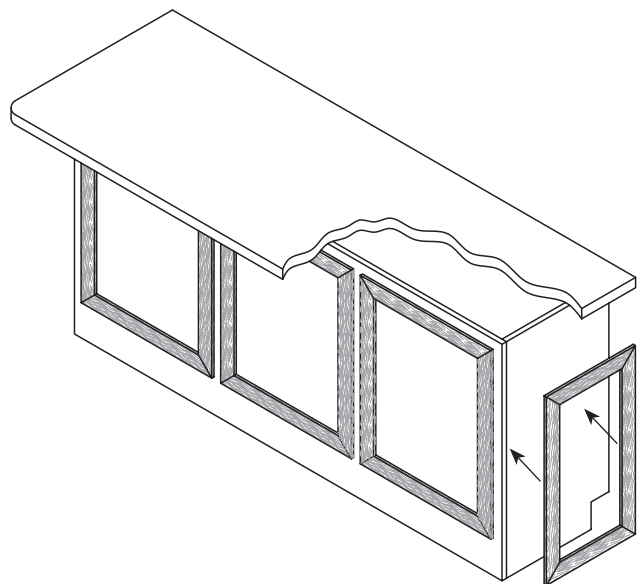

Shown with MP603-57



Style: 10M-ONLAY


PC: 301

Frame: PC301 x 0.6

Min. Size: $5\frac{1}{2}$ x $5\frac{1}{2}$

[139.7mm x 139.7mm]

Shown with MP604-76




Style: 10FM-ONLAY

PC: 301

Frame: PC301 x 0.6

Min. Size: See Notes

Example: Cross section of Style
10M-ONLAY shown with the MP609-57.
(Drawn at a scale of 1:2)

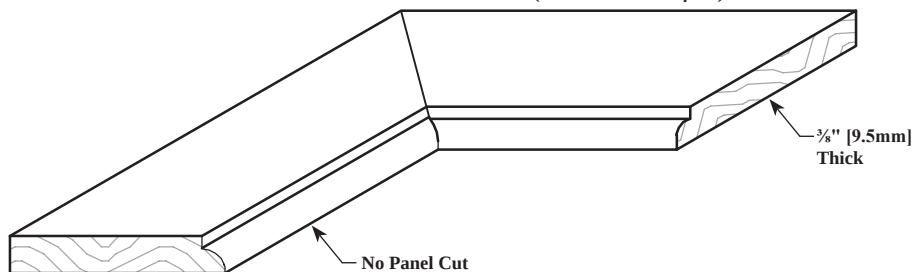

Continued on next page...

► For PRICING ► See Section [B.18](#) in our current Wholesale Pricing Catalog.

Onlay Frames

Cabinet Door & Drawer Front Options

B

Ordering & Pricing Notes: Onlay Frames

Ordering Guidelines

1	Order Forms	Please use Door Order Form (E•Z Form #2) .
Pricing		
1	Pricing	Please see Section B.18 of our current Wholesale Pricing Catalog .

Technical Notes: Onlay Frames

Cabinet Door & Drawer Front Options (Chapter B)

1	Door Styles	Available as a Style 10M-ONLAY Frame and Style 10FM-ONLAY Frame only.
---	-------------	---

Finish Options (Chapter R)

1	Finishing	Available with all WalzCraft standard finish options.
2	3D Laminate	Not available with 3D Laminate (RTF).

Functional Options (Chapter F)

1	Hinge Boring	Hinge boring is not available for Onlay Frames.
---	--------------	---

Material Options

1	Material	Onlay Frames are only available in solid wood.
---	----------	--

Profile Options (Chapter E)

1	Stile & Rail Profiles	Style 10M-ONLAY frames are $\frac{3}{8}$" thick and available with all MP600/MP6000 Mitered stile & rail profiles. Style 10FM-ONLAY frames are $\frac{3}{8}$" thick and available with many of our MP600/MP6000 Mitered stile & rail profiles. Any MP600/MP6000 profile number that has a corresponding [FM] symbol is available with French Miter construction for the Style 10FM-ONLAY frame.
2	Outside Edge Profiles	Available with the D7 , D32 and D33 outside edge profiles.


Sizes /Dimensions

1	Thickness	Available $\frac{3}{8}$" [9.5mm] thick. For $\frac{3}{4}$" or 1" thick frames with no panel cut, please see Section B.8 No-Panel Cut Frame Only Doors.
2	Stile & Rail Widths	Stiles & rails are available in widths from $1\frac{1}{2}$" [38.1mm] to 3" [76mm]. Style 10FM-ONLAY doors using French Miter construction will have the stiles & rails finish at the exact width specified. There will be no width reduction due to the French Miter manufacturing process.
3	Minimum Size	Style 10M-ONLAY: Minimum size is based on $2\frac{1}{4}$" [57.2mm] wide stiles and rails. - The minimum frame opening is 1"W x 1"H [25.4mm x 25.4mm]. Style 10FM-ONLAY: Please see Section B.7 for French Miter construction minimums. - The minimum height for a frame opening with French Miter construction is $3\frac{3}{8}$" [85.7mm]. - The minimum length for a rail on a door using French Miter construction is $5\frac{1}{2}$" [139.7mm].
4	Maximum Size	The maximum size for any Onlay Frame is 36" x 72" [914.4mm x 1828.8mm].


Onlay Frames - END

► For PRICING ► See Section **B.18** in our current Wholesale Pricing Catalog.


Peak Style Pyramid (Center Panel Profile PR600)




Door Style: 10
Min. Frame Opening: 6x7
 [152.4mm x 177.8mm]
Shown with height greater than width.




Door Style: 10
Min. Frame Opening: 7x6
 [177.8mm x 152.4mm]
Shown with width greater than height.




Door Style: 10
Min. Frame Opening: 6x6
 [152.4mm x 152.4mm]
Shown with width equal to height.



Door Style: 1272
Min. Door Size: 6x7
 [152.4mm x 177.8mm]
Shown with height greater than width.




Door Style: 1272
Min. Door Size: 7x6
 [177.8mm x 152.4mm]
Shown with width greater than height.




Door Style: 1272
Min. Door Size: 6x6
 [152.4mm x 152.4mm]
Shown with width equal to height.


Ridgeline Style Pyramid (Center Panel Profile PR700)




Door Style: 10
Min. Frame Opening: 6x7
 [152.4mm x 177.8mm]
Shown with height greater than width.



Door Style: 10
Min. Frame Opening: 7x6
 [177.8mm x 152.4mm]
Shown with width greater than height.




Door Style: 1272
Min. Door Size: 6x7
 [152.4mm x 177.8mm]
Shown with height greater than width.




Door Style: 1272
Min. Door Size: 7x6
 [177.8mm x 152.4mm]
Shown with width greater than height.

► For PRICING ► See Section **B.19** in our current Wholesale Pricing Catalog.

Pyramid Center Panel Door & Drawer Front

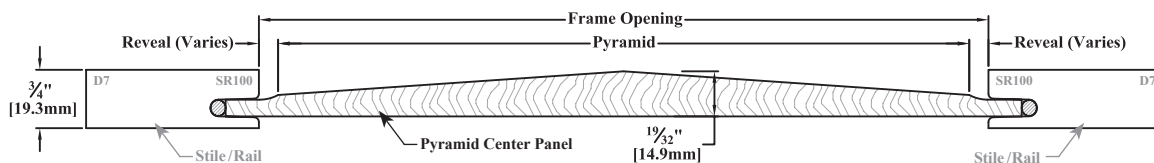

Pyramid Slab Door & Drawer Front

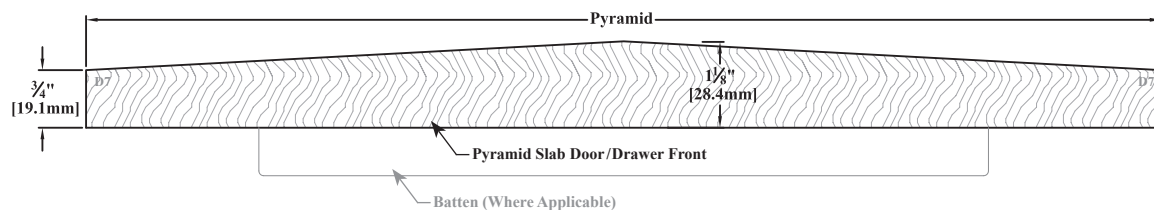

Ordering & Pricing Notes: Pyramid Panel Doors & Drawer Fronts

Ordering Guidelines

1	Order Forms	Please use Door and/or Drawer Front Order Forms (E•Z Forms #2 and #3) .
2	Peak Style Pyramid (Center Panel Profile PR600)	Indicate "PR600" in space provided for Panel Profile on order form. - When the pyramid panel width and height are equal, the angles of the pyramid will be fixed at 45°/90°. - When the pyramid panel width and height are not equal, the angles of the pyramid will vary.
3	Ridgeline Style Pyramid (Center Panel Profile PR700)	Indicate "PR700" in space provided for Panel Profile on order form. - Angles of pyramid will be fixed at 45°/90°. - In order to achieve the Ridgeline look, the pyramid panel width and height cannot be equal.

Pricing

1	Pricing	Please see Section B.19 of our current Wholesale Pricing Catalog .
---	---------	--

Technical Notes: Pyramid Panel Doors & Drawer Fronts

General Information (Chapter A)

1	Grain Direction	See Section A.4 for information on panel grain direction.
2	Ready to Assemble (RTA)	Available where applicable as noted in individual doors sections throughout Chapter B .
3	Warranties	All standard warranties for raised panel and solid slab doors and drawer fronts apply. See Section A.8 for more information.

Cabinet Door & Drawer Front Options (Chapter B)

1	Frame & Panel Doors	Pyramid panels are available in doors and drawer fronts with square or rectangular center panel openings.
2	Slab & Batten Doors	Style 1272 and 1272* are available as pyramid panels.
3	RP Drawer Fronts	RP (Raised Panel) drawer fronts with Look "B" are available as pyramid panels.

Passageway Door Options (Chapter C)

1	Passageway Doors	Pyramid panels are available in doors with square or rectangular center panel openings.
---	------------------	---

Continued on next page...

► For PRICING ► See Section B.19 in our current Wholesale Pricing Catalog.

Technical Notes: Pyramid Panel Doors & Drawer Fronts...continued**Profile Options (Chapter E)**

1	Stile & Rail Profiles	Available where applicable as noted in Chapter E for doors and drawer fronts utilizing pyramid center panels, excluding those with a 4.0mm or 6.9mm panel plow groove cut placement.
2	S/R - AM - Inside Edge	Please submit requests to our Customer Support Team.
3	S/R - AM - Shelf Applied	Please submit requests to our Customer Support Team.
4	S/R - AM - Face Applied	Available where applicable as noted in Section E.6 .
5	Center Panel Profiles	Pyramid panels are only available with PR600 or PR700 as shown in this section.
6	Outside Edge Profiles - Standard	Available where applicable as noted in Section E.15 for doors and drawer fronts utilizing pyramid center panels. Pyramid slab doors and drawer fronts are only available with D7 or D33 .
7	Outside Edge Profiles - AM	Available where applicable as noted in Section E.16 for doors and drawer fronts utilizing pyramid center panels. Pyramid slab doors and drawer fronts are not available with outside edge applied molding profiles.

Material Options

1	Solid Wood	Pyramid panel doors and drawer fronts are only available in solid wood.
---	-------------------	---

Sizes/Dimensions

1	Minimum Size	Pyramid Center Panel Doors & Drawer Fronts: Doors and drawer fronts utilizing pyramid center panels have a minimum panel opening size of 6"W [152.4mm] x 6"H [152.4mm]. Pyramid Slab Doors and Drawer Fronts: Pyramid slab doors and drawer fronts have a minimum size of 6"W [152.4mm] x 6"H [152.4mm].
2	Maximum Size	Pyramid Center Panel Doors & Drawer Fronts: Doors and drawer fronts utilizing pyramid center panels have a maximum panel opening size of 25½"W [650.9mm] x 25½"H [650.9mm]. Pyramid Slab Doors and Drawer Fronts: Pyramid slab doors and drawer fronts have a maximum size of 26½"W [673.1mm] x 26½"H [673.1mm].
3	Thicknesses	When using Traditional stile and rail profiles, Pyramid center panel doors and DFs made from solid wood are available ¾" [19.3mm] and 1" [25.4mm] thick. When using Old World stile and rail profiles, Pyramid center panel doors and DFs made from solid wood are available 1" [25.4mm], 1⅝" [28.6mm] and 1¼" [31.8mm] thick. Pyramid slab doors and drawer fronts are only available 1⅝" thick. See Section S.3 for possible thickness restrictions based on wood species.

Wood Species Options (Chapter S)

1	Wood Species	Available with all solid wood species noted in Sections B.1, B.5, B.9 and B.16 (excluding Rustic and Knotty grades).
---	---------------------	--


Pyramid Panel Doors and Drawer Fronts - END

► For PRICING ► See Section **B.19** in our current Wholesale Pricing Catalog.




Nexus Door & Drawer Front

B

Style: NX62*
Drawer Front
Shown w/ NP401



Style: NX62
Shown w/ NP401

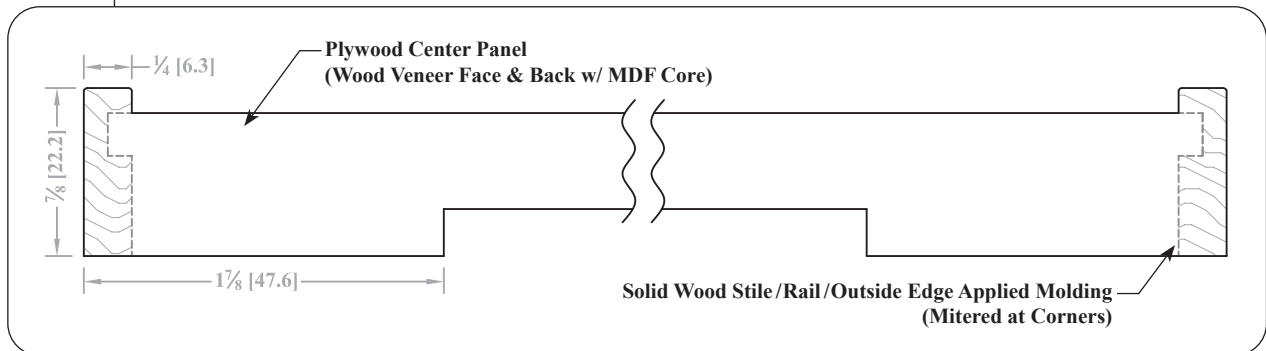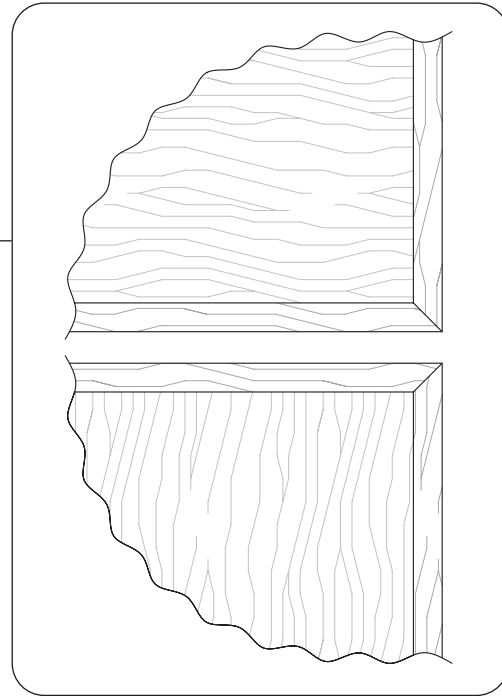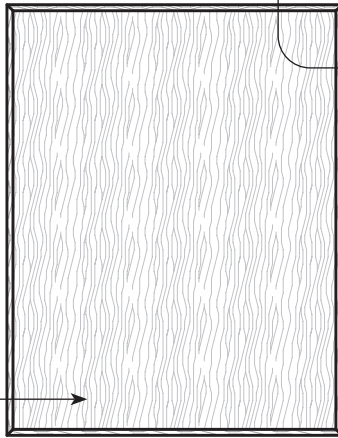


Continued on Next Page...


► For PRICING ► See Section B.20 in our current Wholesale Pricing Catalog.

Nexus Door & Drawer Front Profiles


NP401 PC: 03 Min. Size: 6" x 6" [152.4mm x 152.4mm]

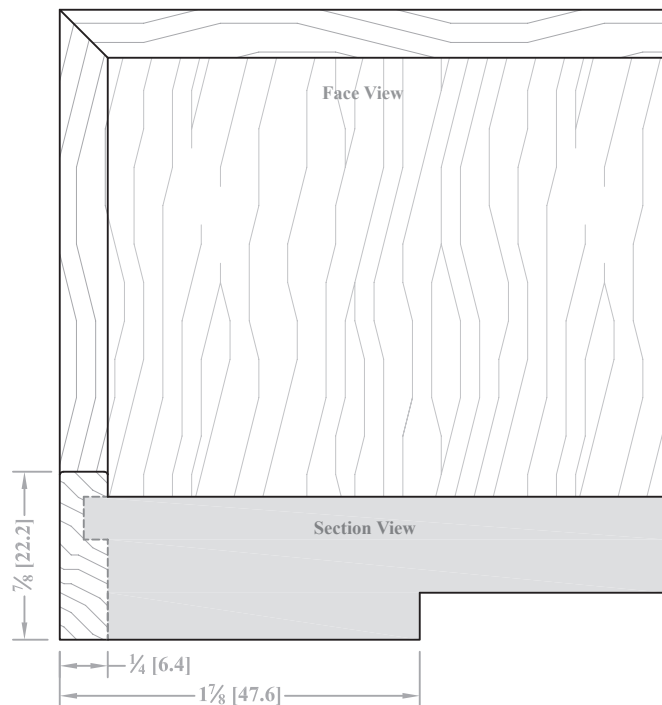


NP411 PC: 02 Min. Size: 6" x 6" [152.4mm x 152.4mm]

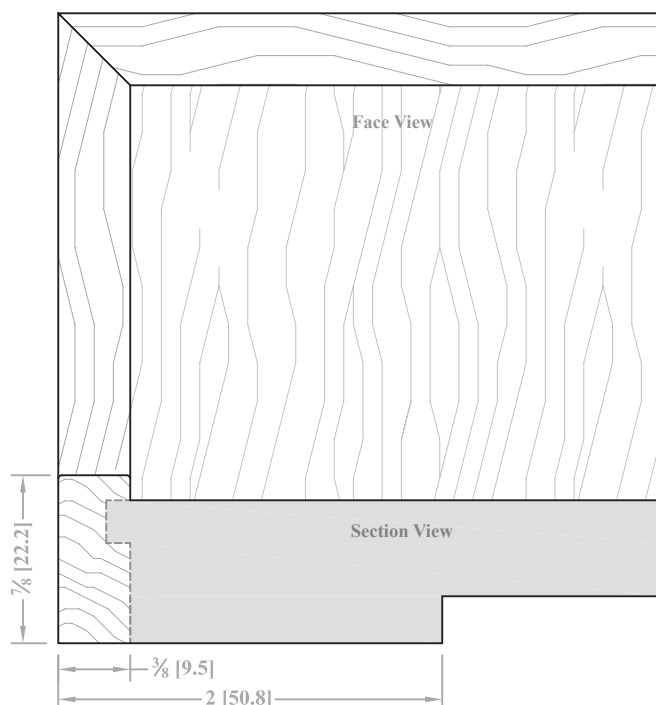

NP402 PC: 02 Min. Size: 6" x 6" [152.4mm x 152.4mm]

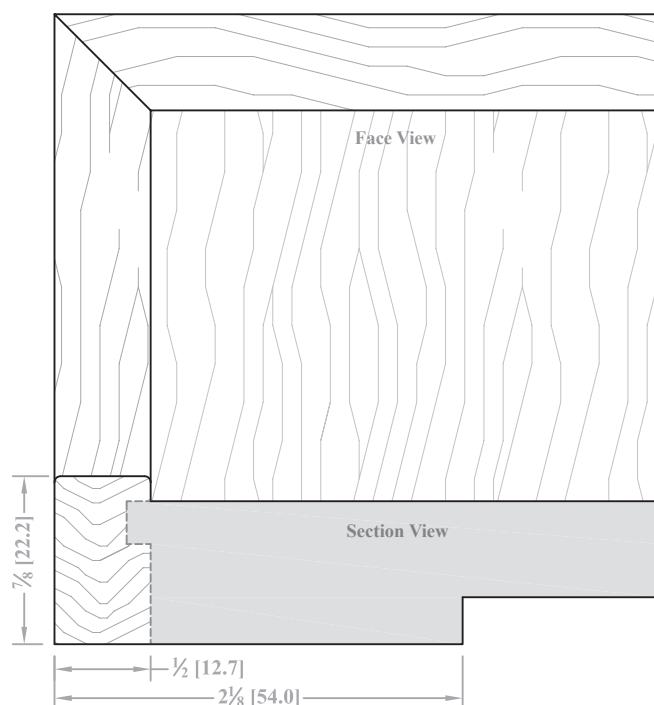

NP403 PC: 01 Min. Size: 6" x 6" [152.4mm x 152.4mm]




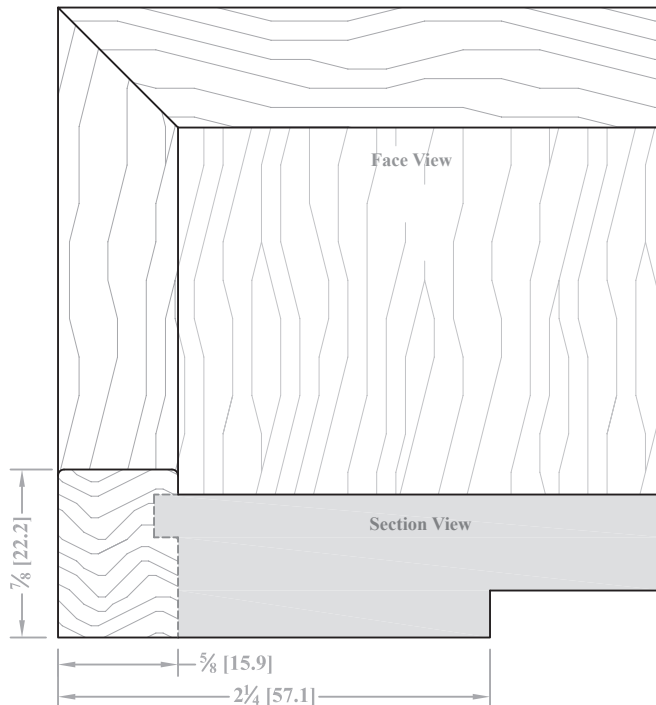


Continued on Next Page...

► For PRICING ► See Section [B.20](#) in our current Wholesale Pricing Catalog.

Nexus Door & Drawer Front Profiles...continued

B

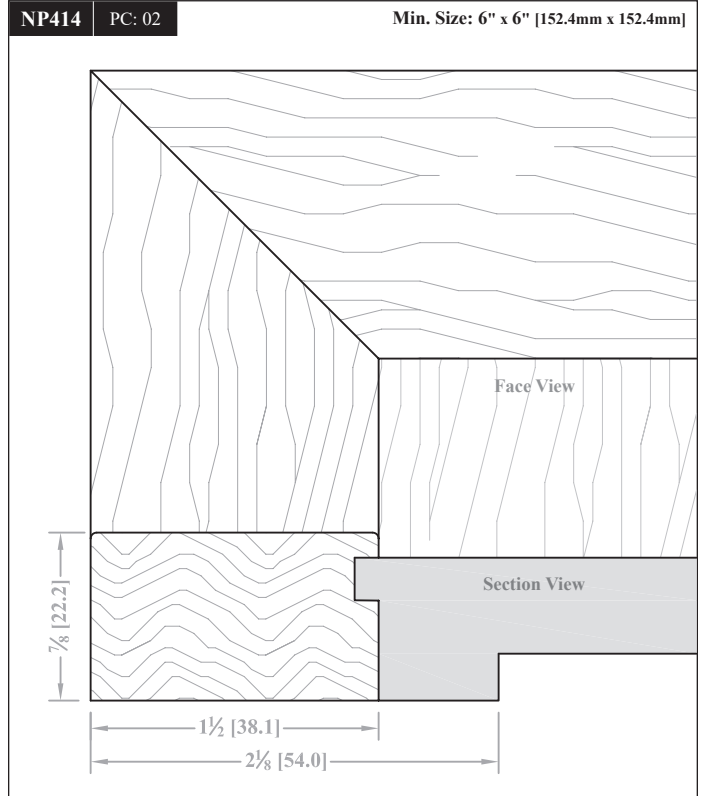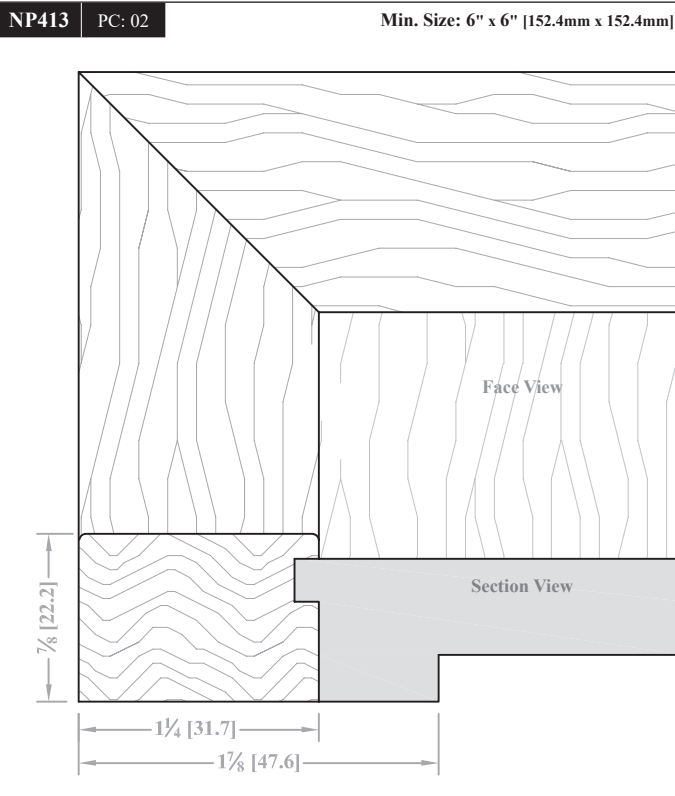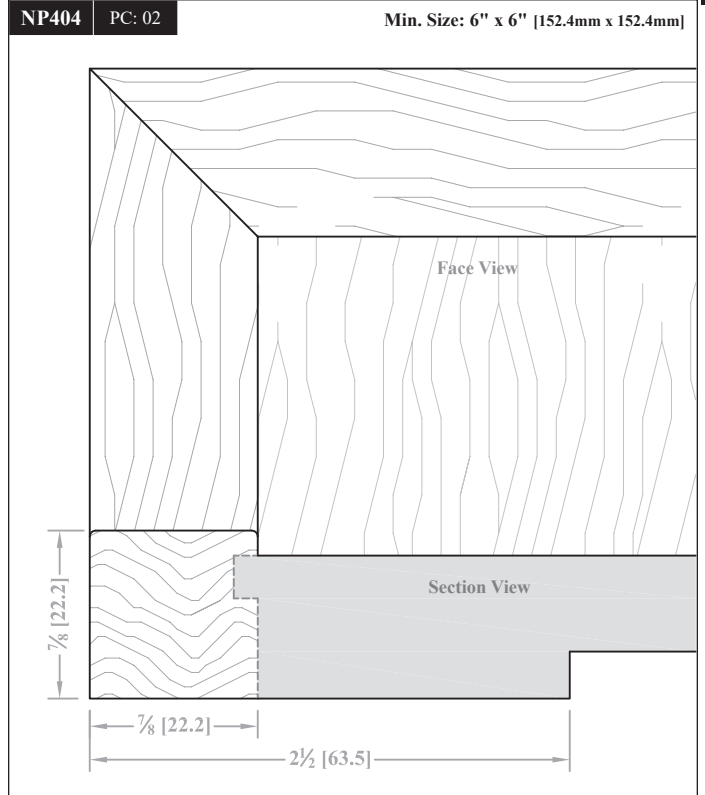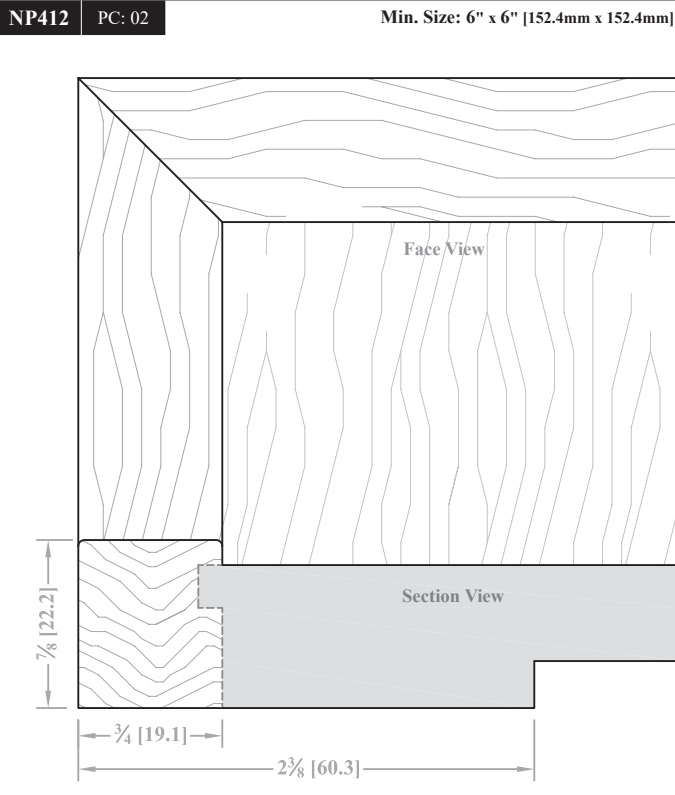


Continued on Next Page...


► For PRICING ► See Section [B.20](#) in our current Wholesale Pricing Catalog.

Nexus Door & Drawer Front Profiles...continued


NP407 PC: 03 Min. Size: 6" x 6" [152.4mm x 152.4mm]

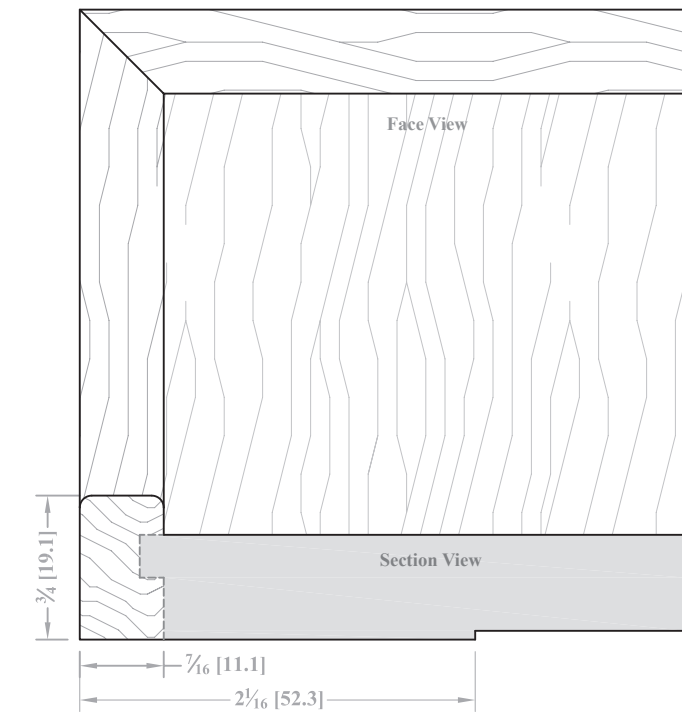


NP408 PC: 04 Min. Size: 6" x 6" [152.4mm x 152.4mm]

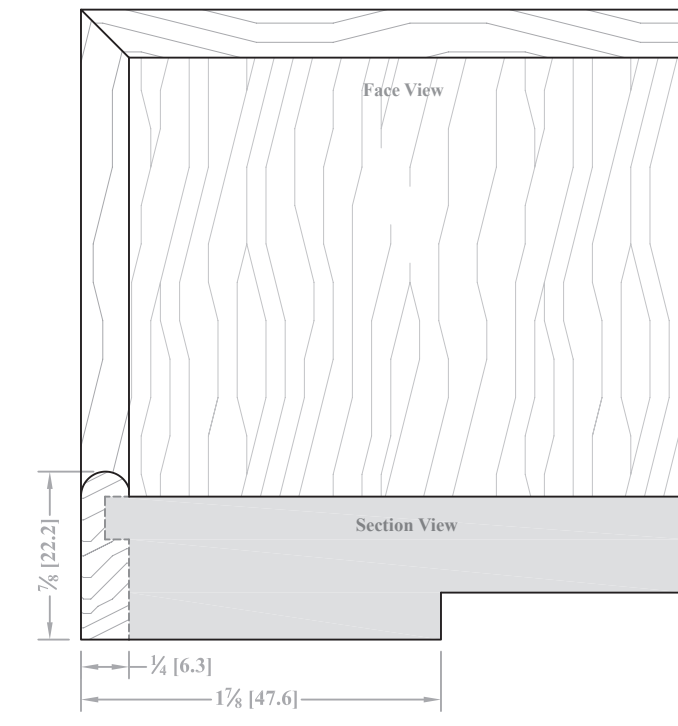

NP409 PC: 03 Min. Size: 6" x 6" [152.4mm x 152.4mm]

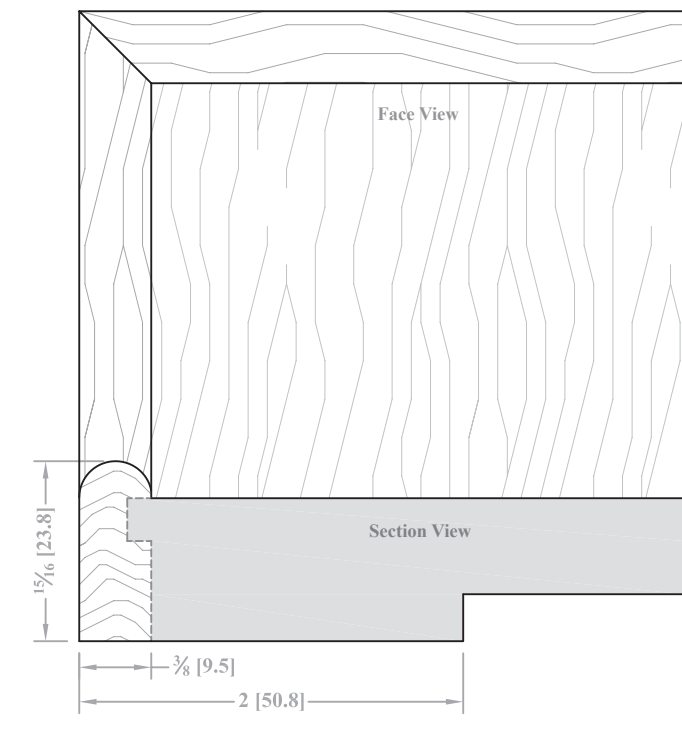

NP410 PC: 05 Min. Size: 6" x 6" [152.4mm x 152.4mm]

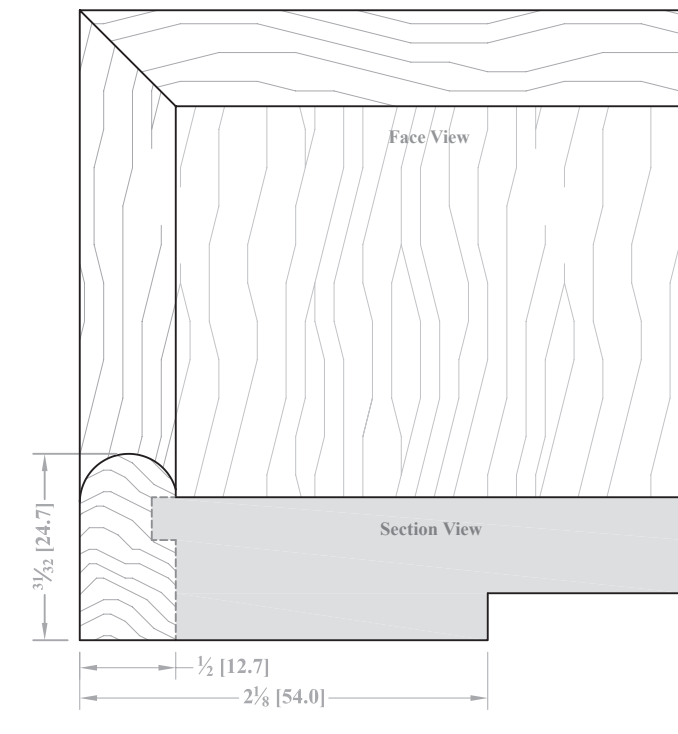


Continued on Next Page...

► For PRICING ► See Section [B.20](#) in our current Wholesale Pricing Catalog.


Nexus Door & Drawer Front Profiles...continued

B

NP406 PC: 05 Min. Size: 6" x 6" [152.4mm x 152.4mm]

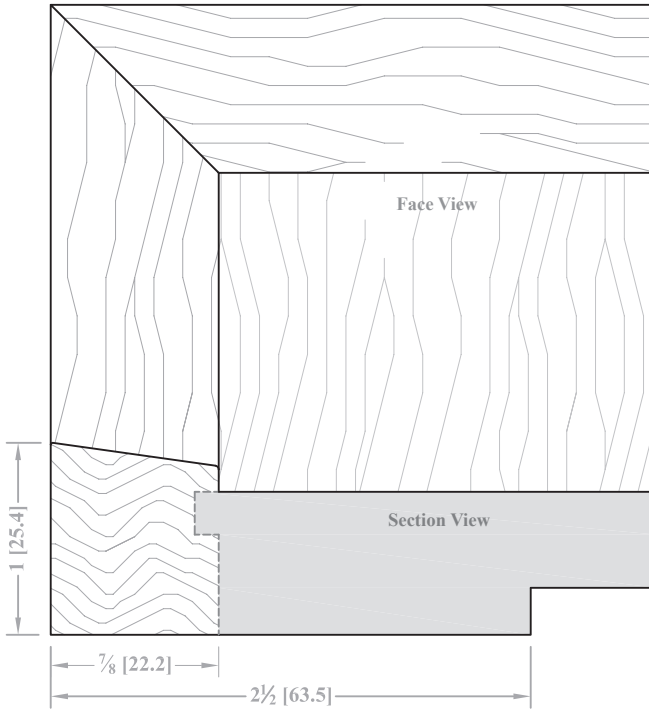


NP405 PC: 05 Min. Size: 6" x 6" [152.4mm x 152.4mm]

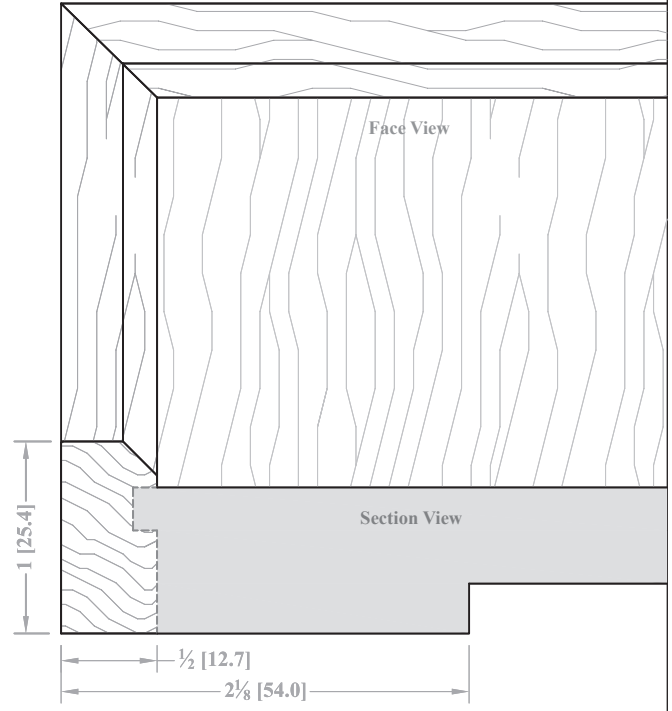


Continued on Next Page...

► For PRICING ► See Section [B.20](#) in our current Wholesale Pricing Catalog.


Nexus Doors with Reeded Applied Molding Options

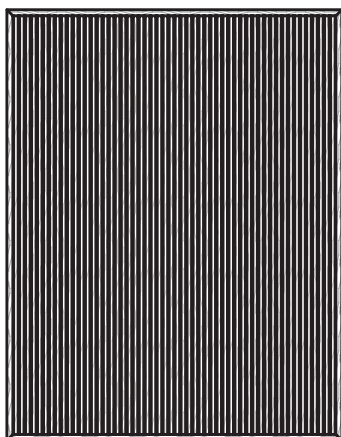


Style: NX62
Shown w/ NP502 and
Reeded Applied Molding #3241



#3241
PC: M102
Sq Ft: 2.08

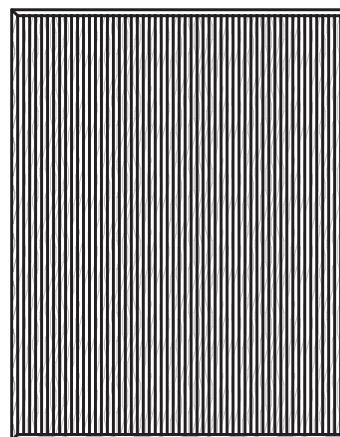


Style: NX62
Shown w/ NP502 and
Reeded Applied Molding #3215



#3215
PC: M102
Sq Ft: 2.11


NP502 PC: 04

Shown w/ #3241

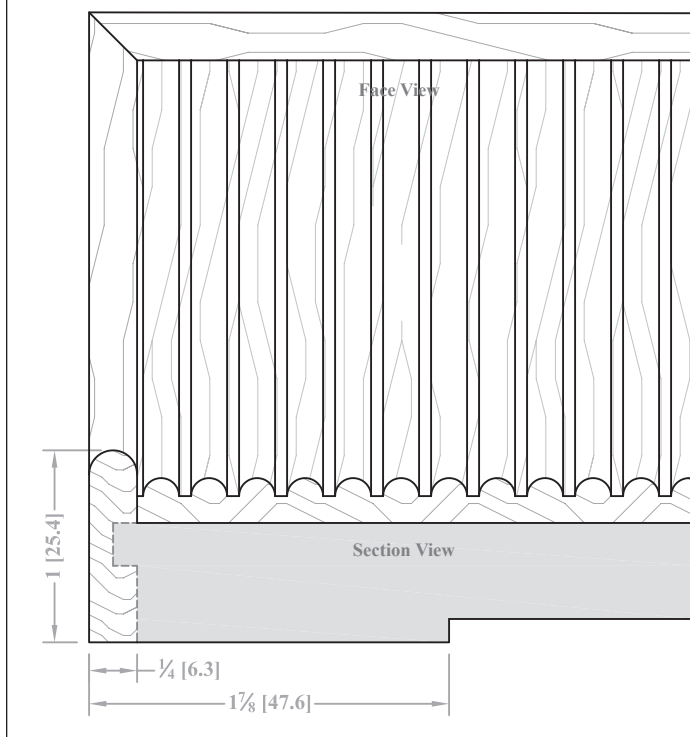

NP502 PC: 04


Shown w/ #3215

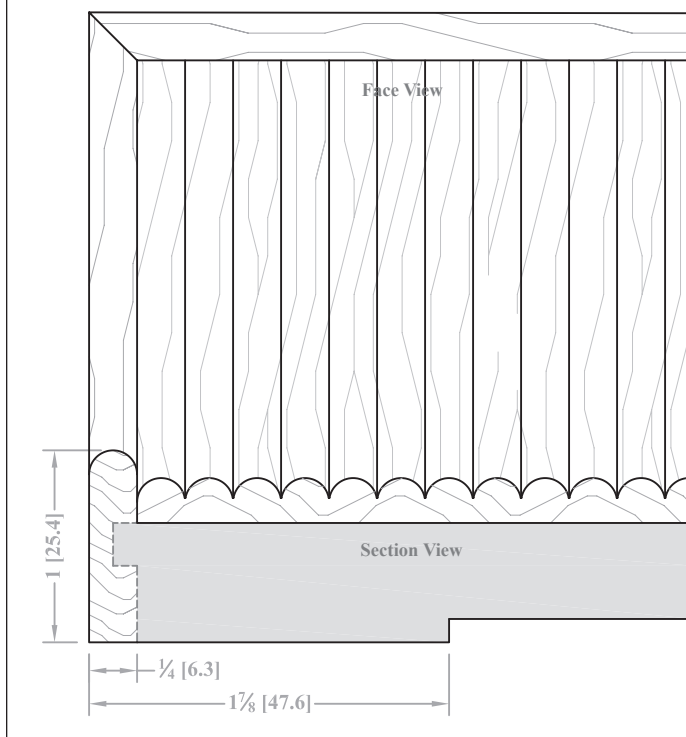








Continued on Next Page...

► For PRICING ► See Section [B.20](#) in our current Wholesale Pricing Catalog.

Nexus Profiles for Reeded Applied Molding #3241

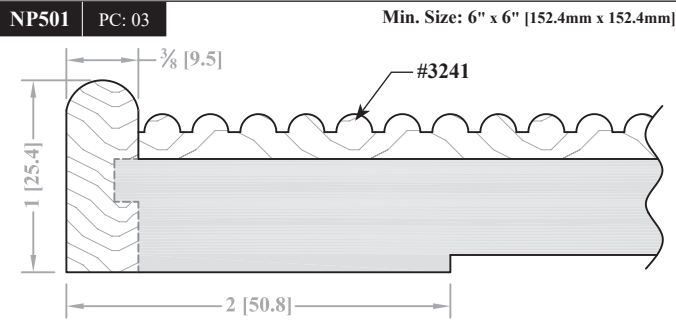

Nexus Profiles for Reeded Applied Molding #3215

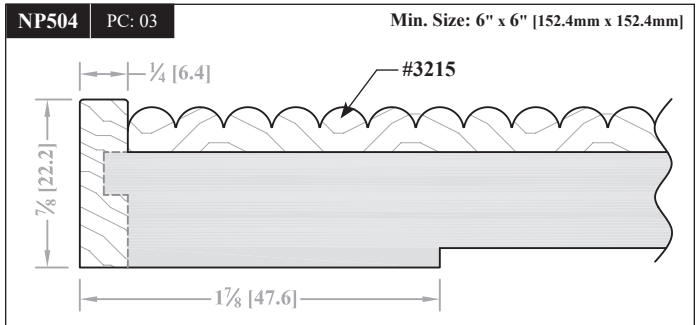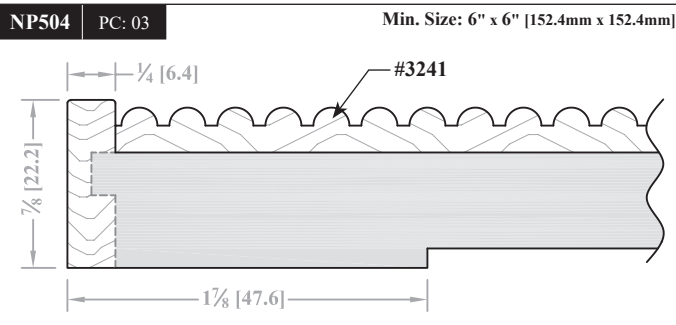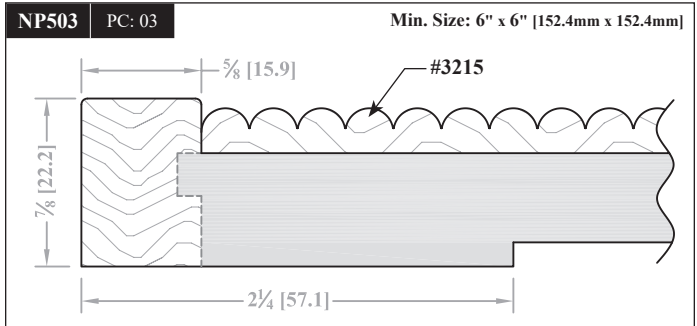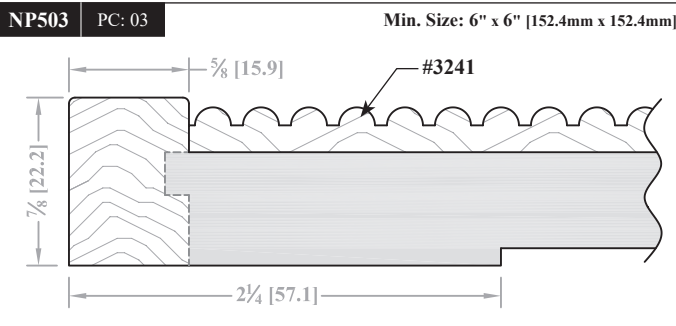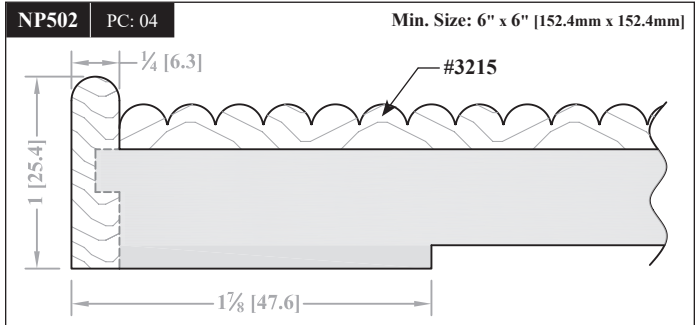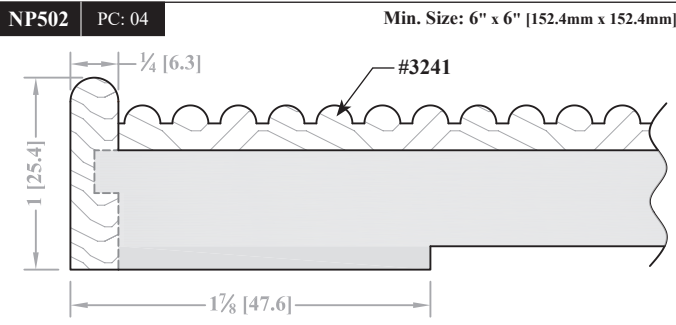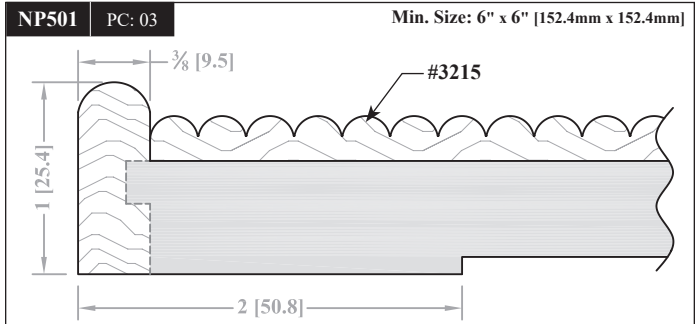

Continued on Next Page...

► For PRICING ► See Section [B.20](#) in our current Wholesale Pricing Catalog.

Ordering & Pricing Notes: Nexus Doors and Drawer Fronts

Ordering Guidelines

1	Order Forms	Please use <i>Nexus Door and Drawer Front Order Form (E•Z Form #7.1)</i> .
2	Ordering Information	When ordering, please specify: • Door Style NX62 and/or Drawer Front Style NX62*. • Nexus profile (ex: NP401). • Center panel wood species/grade and grain direction. • Stile/rail/molding wood species/grade. • When choosing a reeded applied molding for the face, also indicate the reeded applied molding number (ex: #3241, #3215), the reeded applied molding wood species/grade and the direction/placement of the molding. ◦ Vertical (top to bottom) or horizontal (left to right).
Pricing		
1	Pricing	Please see <i>Section B.20</i> of our current Wholesale Pricing Catalog .

Technical Notes: Nexus Doors and Drawer Fronts

Design Options (Chapter G)

1	Distressing	Please submit your requests for distressing options for Nexus doors to our Customer Support Team.
---	-------------	---

Finish Options (Chapter R)

1	Stain	Available with a Natural/Clear Coat (<i>no stain</i>), Wiping, Spray No-Wipe, and Water Based Wiping stain options with the following exception: • Nexus doors and drawer fronts using beaded/reeded applied molding are not available with spray no wipe stains. Individual moldings #3215 and #3241 are not available with spray no wipe stains.
2	SolidTone®	Available with all SolidTone®, SolidTone® WoodGrain and Primed Only for Paint options.
3	Glaze, Rub Through	Please submit your requests for glazing and/or Rub Through options for Nexus doors to our Customer Support Team.

Functional Options (Chapter F)

1	Hinge Boring	Only available with 35mm hinge boring. • NP407 is only available with our 12.7mm deep hinge boring option. • See <i>Section F.1</i> for more information, including minimum stile and rail widths for hinge boring.
2	Finger Pull Routs	Available with finger pull routs FP100 , FP200 and FP500 , with the following exceptions: • FP200 not available with NP407-52, NP501-51, NP502-48, NP504-48. • FP500 not available with NP502-48, NP504-48. • See <i>Section F.7</i> for more information on finger pull routs.

General Information (Chapter A)

1	Grain Direction	Center panel grain direction must be specified (vertical or horizontal).
2	Ready to Assemble	Nexus doors and drawer fronts are not available Ready to Assemble (RTA).
3	Warranties	Nexus doors and drawer fronts will carry no warranty against bowing (barrel effect). • Please see <i>Section A.8 - Warranties</i> for more information on warping, bowing (barrel effect) and twisting. • All standard warranties for MDF products apply.

Material Options

1	Center Panels	Nexus door center panels are made from ½" thick plywood (MDF core with wood veneer face & back), raw MDF or raw MDF-MR.
2	Stiles/Rails/Molding	Stiles/rails/outside edge applied molding will be made from solid wood mitered at the corners.

Profile Options (Chapter E)

1	Reeded Applied Molding	Reeded applied molding #3241 and #3215 are only available with Nexus profiles NP501 , NP502 , NP503 and NP504 . Nexus profiles NP501 , NP502 , NP503 and NP504 are only available when combined with reeded applied molding #3241 or #3215 .
---	------------------------	---

Continued on next page...

► For PRICING ► See Section [B.20](#) in our current Wholesale Pricing Catalog.

Technical Notes: Nexus Doors and Drawer Fronts...continued

Sizes/Dimensions

1	Nexus Doors Minimum Size	The minimum size for a Nexus door/df is listed with the image of the profile. • Nexus profiles have fixed stile/rail widths that cannot be modified. • Requests for sizes below stated minimums should be submitted to our Customer Support Team.
2	Nexus Doors with Reeded Applied Molding	When running the reeded applied molding vertically (top to bottom), the overall width of the door or drawer front will only be available in 1/4" [6.4mm] increments. When running the reeded applied molding horizontally (left to right), the overall height of the door or drawer front will only be available in 1/4" [6.4mm] increments.
3	Nexus Doors Maximum Sizes	NP400 Series: 36" [914.4mm] across the grain, 80" [2032.0mm] with the grain. NP500 Series: 28" [711.2mm] across the grain, 48" [1219.2] with the grain.
4	Thicknesses	Nexus doors and drawer fronts are only available in the thickness indicated within the individual profile drawings.

Nexus Doors and Drawer Fronts - END

► For PRICING ► See Section [B.20](#) in our current Wholesale Pricing Catalog.

